


196

MOUNTING INSTRUCTION

This product is intended for installation by a qualified electrician

Fix this card on the wall

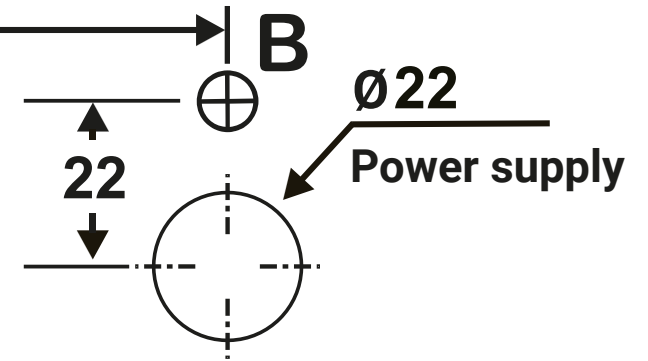

1.

1. Fix the mounting instruction sheet on the wall. Suitable height for hole "C" is 1300 mm from ground.

2.

2. Drill 4 holes (A, B, C, D Ø8 x 35 mm depth).

3.

3. Take off the mounting instruction sheet. Hammer dowsels into 4 holes.

IMPORTANT INFORMATION:
This material falls within the scope of the Waste Electrical & Electronic Equipment Directive 2002-96 EC (WEEE).

NOTE:
This product should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority for recycling advice.



SUPRATECH

174

6.

6. Put the cover onto the base plate with 10° angle, then fix it correctly.

5.

5. Connection:
A. Connect the live wire (colored red or brown) to the terminal block "L".
B. Connect the neutral wire (colored blue or black) to the terminal block "N".
C. Connect the ground wire (colored green and yellow) to the terminal block marked "⊕".

4.

4. Remove the cover from the base plate. Put the power cord through the hole, then secure the base plate onto the wall.

1300 mm from the ground

