

Recessed 3 in 1 stainless steel handwashing station

Reference: **LM-239**



Description

Recessed stainless steel handwashing station with 2 mm thick facade combining all the essentials for the handwashing cycle: soap, water, and air.

HYGIENE: touch-free by infrared detection, to avoid germs from spreading.

VANDAL-PROOF: users do not have access to the fixtures and fittings, water supply and evacuation in the technical gallery. Maintenance and soap refill done from the back.

Maximizing utility in a minimal space.

Technical characteristics

AISI 304 stainless steel 2/1,5 mm thickness, brushed finish.

Soap = vertical stainless steel spout with infrared detection. Operates via peristaltic pump for liquid soap, with easy to fill refillable 1L plastic bottle. Delivers an exact soap dose. Automatic drip-proof dosing system.

Water = vertical stainless steel spout with infrared self-adjustable detection for cold or pre-mixed water.

6LPM flow (1,9 LPM upon request).

Security stop after 90 seconds without interruption.

230/12V transformer for water and soap. 0.5-8 bar - max 70°C.

Air = 920W energy-saving high-speed hand-dryer - 4.2 A with infrared detection. Adjustable air flow and volume level.



Heated or ambient air switch. Dries within 9 seconds.

Front installation by placing the unit into the rough wall opening and securing it through the technical duct using two stainless steel corners. This ensures a seamless and stable installation on wall with thickness from 15 to 240 mm.

F1/2" flexible water inlet . 1 1/4" drain.

Dim. : W660 x D300 x H790 mm (rough wall opening W610 x H740 mm).

CE. 3 year warranty.

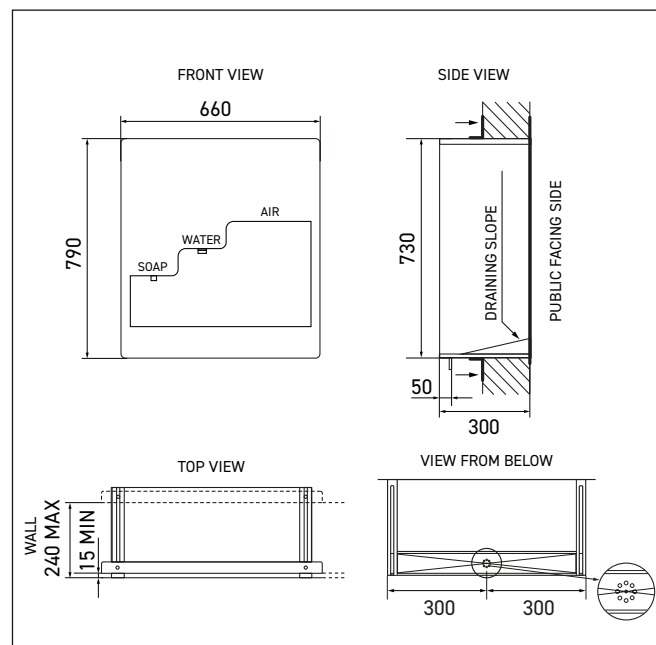

Reference

Recessed 3 in 1 stainless steel handwashing station

- **LM-239** brushed stainless steel

Options

- With stainless steel mirror (Ref. LM-239M)
- 6L soap tank in technical duct
- Limited 1,9 LPM water flow

