

AKWALINE wall-mounted automatic stainless steel faucet

References: **RES-140-S1** / **RES-141-S1** / **RES-142-S1** / **RES-143-S1**

Description

Wall-mounted electronic touch-free faucet with Ø 28 mm ultra-thin spout, AISI 316 brushed stainless steel, for cold or pre-mixed water.

Optimal durability of the faucet surface (resistant to scratches, UVs, fingerprints...) and a hygienic surface that is easy to clean, ensuring long-lasting and impeccable quality appearance to your sanitary spaces.

Features

The unit has a self-adjusting infrared sensor which can also be adjusted by remote control (sensor range, flow time, hygiene rinse, temporary off, safety time, reset...).

AISI 316 stainless steel brushed finish spout, 220 mm length, Ø 28 mm (or 275 mm L version).

Powered by 230/9V transformer or 9V battery.

Low battery LED indicator.

Dual IP67 power supply with battery and transformer: recessed transformer version featuring integrated backup battery for uninterrupted operation during power outages.

Periodic hygiene rinse.

Automatic shut-off after 90 seconds of uninterrupted operation.




Aerator with limited 5 LPM flow rate (3,8 or 1,9LPM).

Cold or pre-mixed water supply, M $\frac{1}{2}$ " solenoid valve with filter.

Lead-free water circuit.

Water pressure: 0.5 – 8.0 bars / Temperature max.: 70°C

3 year limited warranty. CE. ACS.

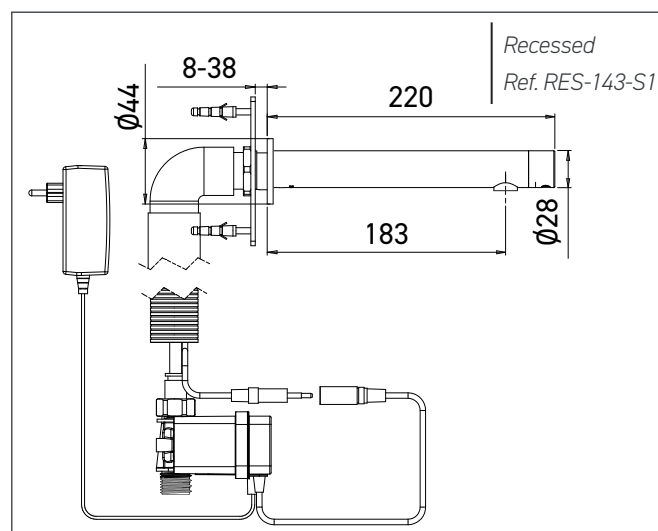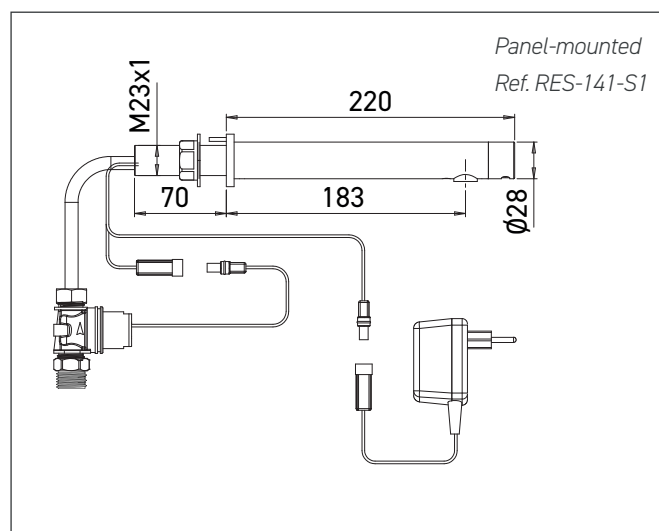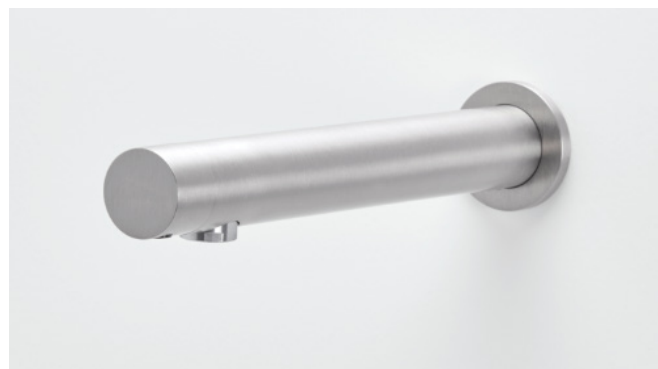

References model choices

AKWALINE stainless steel electronic faucet

- **RES-140-S1** panel mounted, 9V battery
- **RES-141-S1** panel mounted, 9V transformer
- **RES-142-S1** recessed, 9V battery
- **RES-143-S1** recessed, 9V transformer

Options

- RES-31 remote control
- Limited 1.9 or 3.8 LPM flow rate
- Long 275 mm spout (Ref...-L)
- IP 68 transformer to supply up to 4 faucets ref. RES-294
- Junction box to supply up to 10 faucets ref. RES-295
- Integrated on washbasin support frame
- Matching soap dispenser

