

ALLURE automatic foam soap dispenser

Reference: **RES-168M**

Description

Electronic foam soap dispenser with concealed infrared sensor at the tip of the spout.

Drastic reduction in soap consumption: refillable tank for non-proprietary soap, with precise and consistent dosing.

Adjustable foaming effect for user comfort and optimized usage.

Touch-free operation to prevent the risk of cross-contamination.

Minimalist, modern, and elegant design.

Robust brass construction allows installation in high-traffic environments.

Peristaltic pump: soap flows through a tube without coming into contact with the pump, preventing contamination and backflow.

Easy to install and refill.

Perfect combination with ALLURE DS electronic faucets for hygiene, pleasure of use and the brand image of sanitary areas.



Features

Activated by infrared sensor.

Powered by 230/12V transformer.

Chrome-plated brass spout.

1L refillable reservoir with wall-mounted support (2L or 6L options).

Operates with peristaltic pump and air compressor for foaming effect.


Soap viscosity: 0-100 cPs, PH levels: 6.5 to 8.5.

Deck-mounted installation, standard with an under-sink tank.

Wall-mounted support for pump and tank.

Optional RES-39 remote control for adjusting soap quantity, air volume (foaming effect), priming after refill, temporary shut-off, and reset.

CE. 2 year warranty.

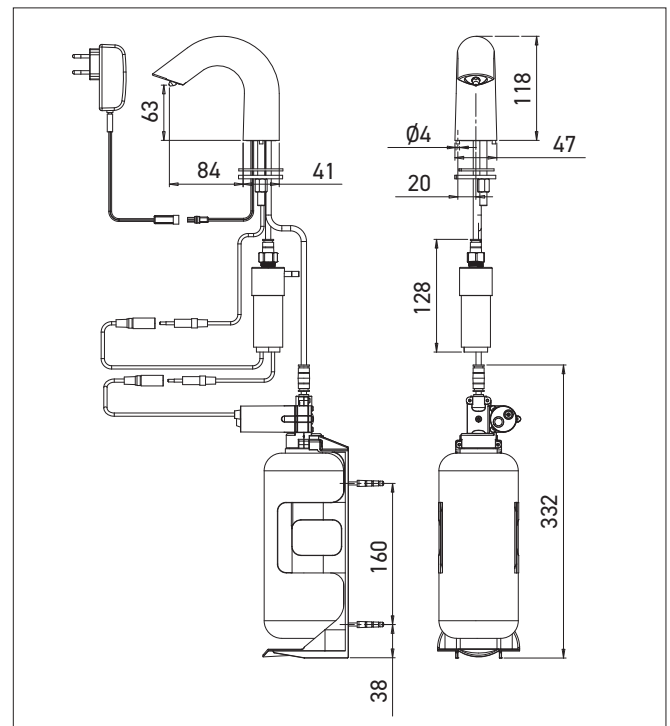

Reference

ALLURE automatic foam soap dispenser

- **RES-168M** on mains

Options

- RES-39 Remote control
- RES-790 6L soap tank to supply up to 6 dispensers
- RES-799 2L soap tank
- RES-294 IP 68 transformer to supply up to 4 dispensers
- RES-296 Junction box to supply up to 10 dispensers
- Matching automatic faucet