

FREE wall-mounted automatic urinal flush valve

References: **DUS-30** / **DUS-31**

Description

Wall-mounted individual electronic urinal flush valve with infrared presence detection, for automatic flushing upon user departure.

Comfort: touch-free and odourless system (flushing after each use).

Total hygiene: prevents the spread of hand-borne germs.

Water savings: only the urinal in use is flushed.

Minimalistic design.

Features

Infrared detection with optimised preset settings or adjustable by remote control (flush time, sensor range, activation time, temporary stop, preflush, periodic flush...).

Powered by internal 9V lithium battery or 230/9V transformer.

Low battery LED indicator light.

Pre-rinsing after 3 seconds of user presence and automatic flushing if not used for 24 hours (maintains water in the trap, reduces risk of freezing, combats bacterial growth).

Chrome plated brass body.

Built-in solenoid valve.

M1/2" cold water angle connection.

Shut-off valve (flow rate settings) and filter.

Chromed T200 mm Ø 16 mm straight flush pipe with spud.

Sensor range: 600 mm (adjustable).


Flushing duration: 6 seconds (adjustable).

Time delay before rinsing: 2 seconds (adjustable).


Pressure: 0.5 to 8 bars.

Dimensions H144 x D74 x Ø 50 mm.

CE. 3 year warranty.

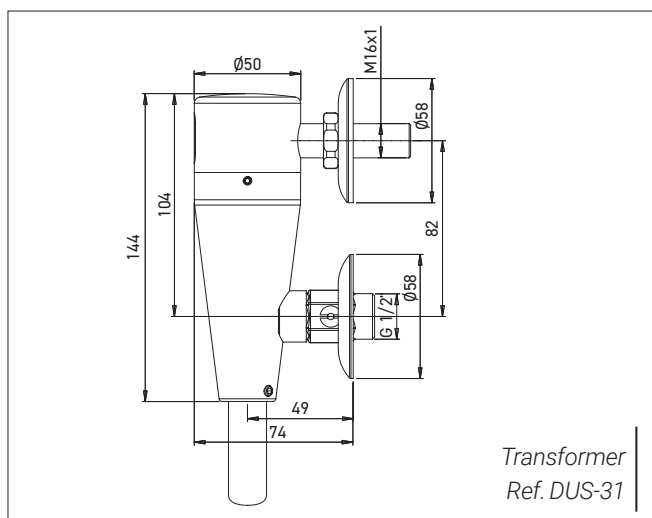

Transformer
Ref. DUS-31

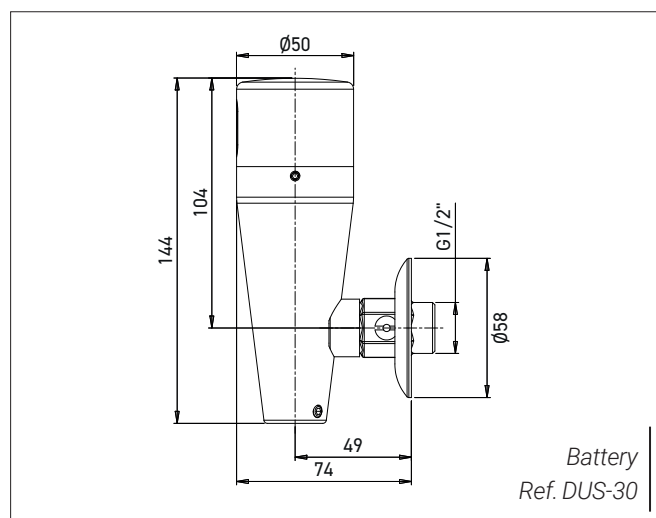

Battery
Ref. DUS-30

References model choices

FREE electronic urinal flush valve

- **DUS-30** 9V alkaline battery
- **DUS-31** 230/9V transformer

Options

- RES-31 remote control
- IP 68 transformer