

Electronic detection kit for urinals

References: **RES-118P / RES-119P**

Description

Presence detection kit for touch-free urinal flushing, triggered when the user leaves, designed to be integrated into your sanitary installations to maximize hygiene and reduce water consumption. Includes sensor, solenoid valve, and power supply via transformer or battery box.

Vandal-proof.

Features

Infrared detection, 600 mm range (adjustable from 300 to 800 mm).

Settings adjustable via remote control (detection range, presence time before flush, flush duration, periodic rinsing, temporary shut-off...).

Powered by 9V battery or 230/9V transformer.

Low battery indicator for replacement.

Default flush duration 6 sec.

Periodic hygienic rinsing.


Chrome-plated brass sensor $\varnothing 35$ mm.

Mounting on panel from 2 to 20 mm thick, or flush-mounted version with front-removable sensor.

M1/2" solenoid valve with filter.

Water pressure: 0.3 – 8.0 bar.

CE. 3 year warranty.

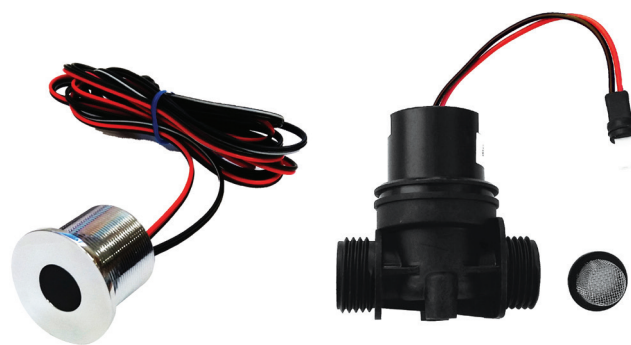


Sensor


Solenoid valve



Transformer or IP67 battery box

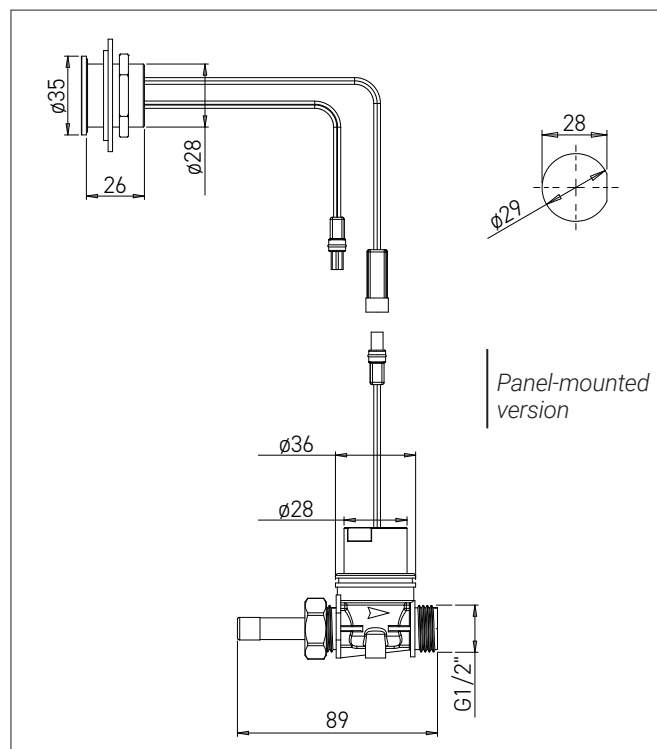

Panel-mounted version

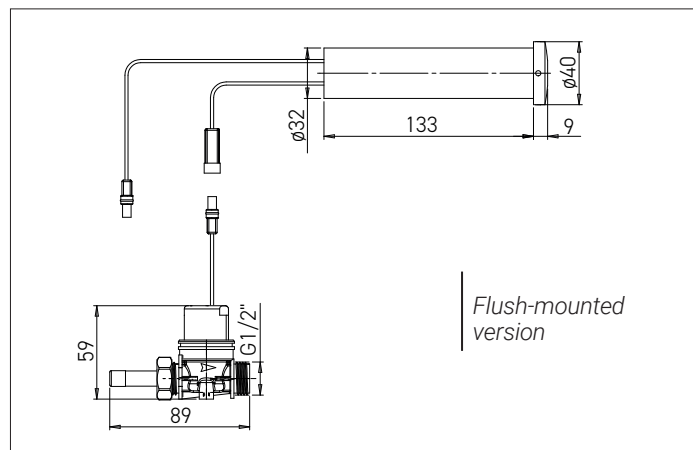

Flush-mounted version

References model choices

Urinal detection kit

- **RES-118P** 9V battery
- **RES-118P-T** 230V transformer
- **RES-119P-ENC** flush-mounted, 9V battery
- **RES-119-T-ENC** flush-mounted, 230V transformer

Options

- RES-31 Remote control
- RES-294M IP68 transformer for up to 4 kits
- RES-295 Transformer box to supply up to 10 kits
- Finishes Matte black, matte gold, copper PVD, AISI316 brushed stainless steel (contact us)

