

DOMINO urinal with integrated infrared sensor

References: **S17 / S17B**



Description

Wall-mounted urinal in rimless ceramic, with integrated infrared detection on the flush nozzle.

The wide bowl minimizes splashing outside the urinal.

Automatic touch-free flush is triggered when the user leaves.

Simplified installation and maintenance.

Ideal for high-traffic sanitary spaces.

Quick **"Plug and Play"** installation with radar detection integrated into the ceramic = simply mount, connect, and the urinal is operational.

ECO modes for significant water savings:

ECO 1: Reduces the number of flushes during periods of heavy use (schools, venues, stadiums...).

ECO 2: The urinal flushes after each use, but not always with the same amount of water.

Settings adjustable based on usage frequency.



Features

Infrared detection of the user's presence at a maximum distance of 0.75 m and a minimum duration of 7.5 seconds.

Settings adjustable via remote control (detection range, flush duration, periodic flush, pre-flush and post-flush, on/off...).

Powered by external 230/24V transformer or 6V batteries.

Power consumption: 24 V = 7 W, 9 V = 3 W.

Automatic flush after 24 hours without use.

Flush duration adjustable from 0.5 to 15.5 seconds.

Minimum use time before activation adjustable from 6 to 15 seconds.

Pre-flush and post-flush can be enabled via remote control.

Detection range 0.6 – 0.75 m.

Pressure 1 – 6 bar. Flow rate 18 LPM.


M1/2" threaded water inlet, Ø40 mm waste outlet.

Angle stop valve (flow adjustment).

Supplied with grid waste and PVC trap.

Dimensions: W430 x H665 x D315 mm.

CE certified. Electronics guaranteed for 5 years.

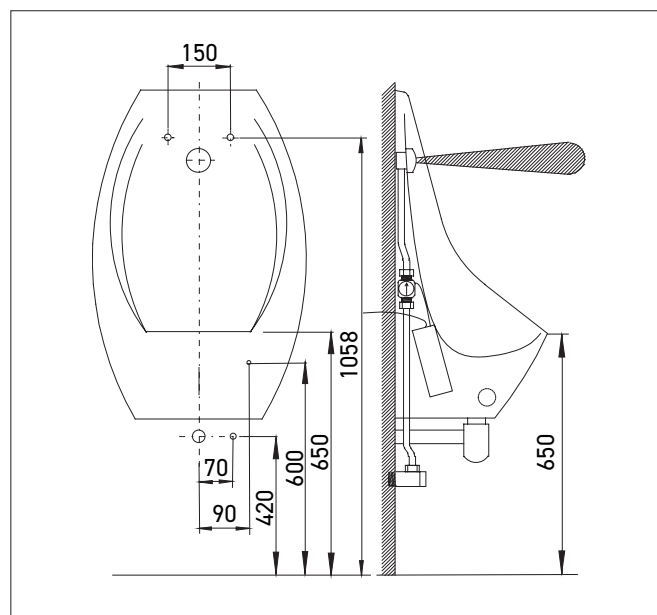

References model choices

DOMINO urinal

- **S17B** 4 x 1,5 V AA alkaline batteries
- **S17** 24V external transformer

Options

- SLD03 Remote control
- SPZ07 Plug-in transformer for 1 urinal
- SPZ06 230/24V transformer box for 1 urinal
- SPZ02 230/24V transformer box for 5 urinals
- SPZ01 230/24V transformer box for 9 urinals

