

Automatic stainless steel plate for a WC flush GEBERIT


Reference : **SLW-I**

EN ISO 9001:2015




Ref. SLW-I


Function

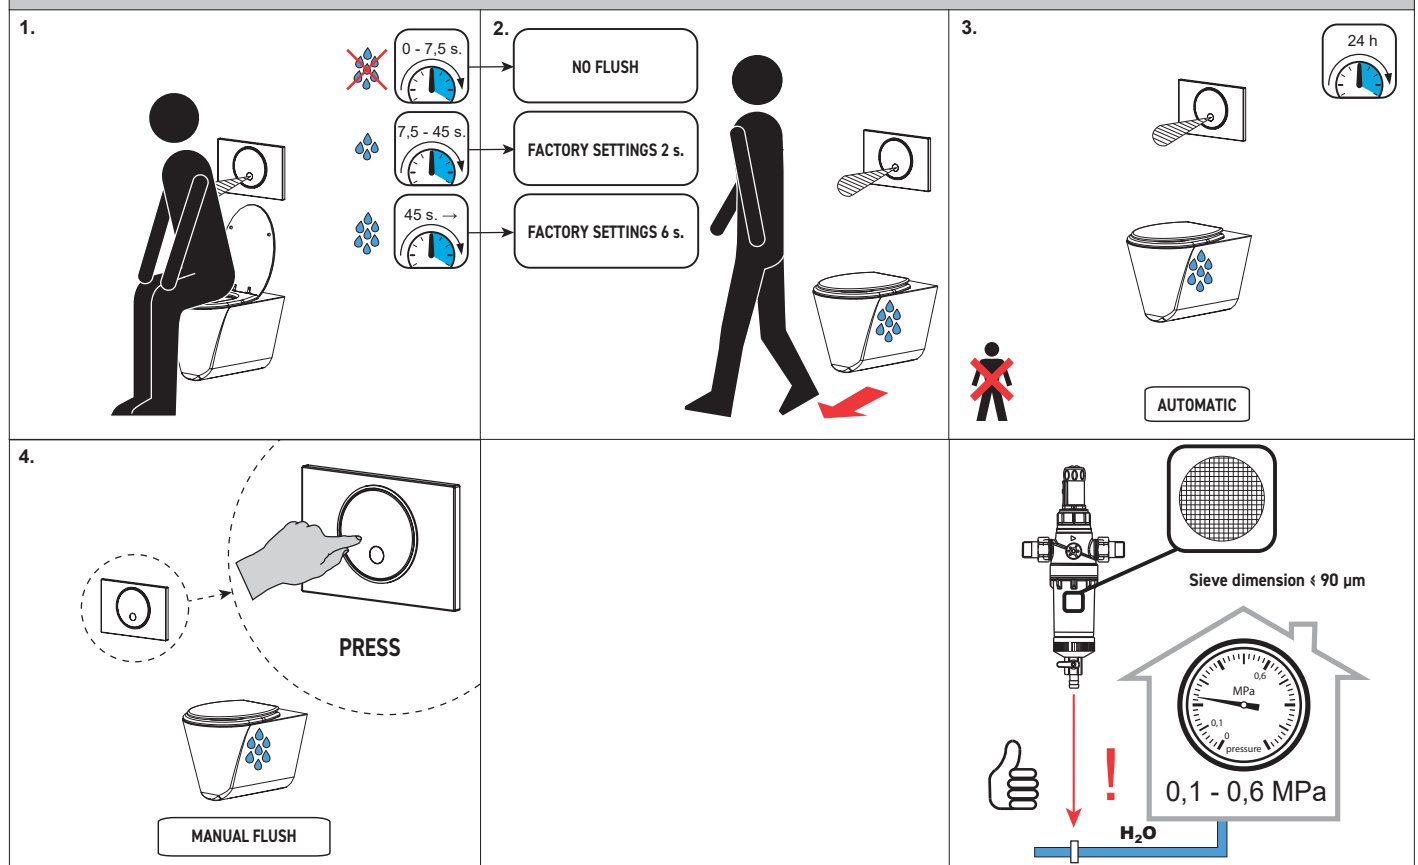


Properties

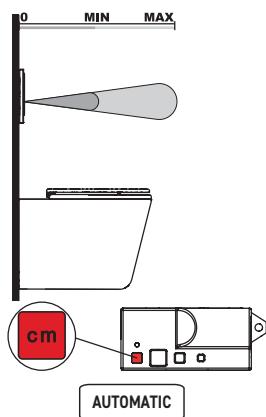

SLD03: 0,3 - 0,7 m

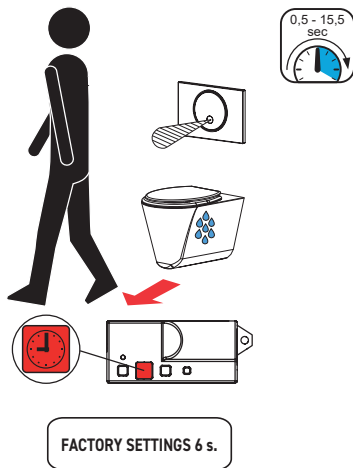



SLD03: 0,5 - 15,5 s.

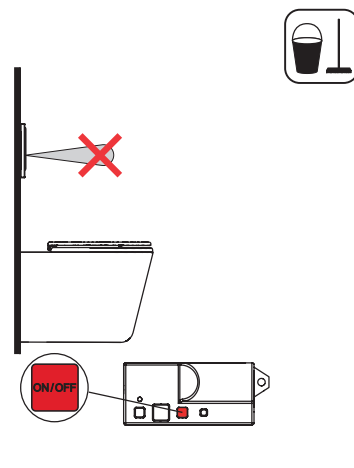

SLD03: ON / OFF







MOUNTING INSTRUCTIONS









Supplied equipment

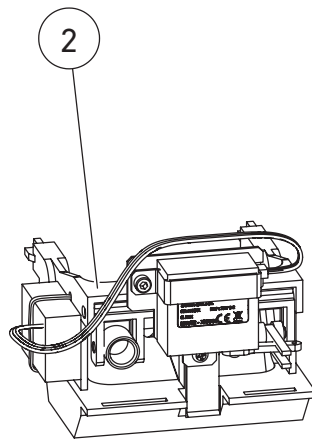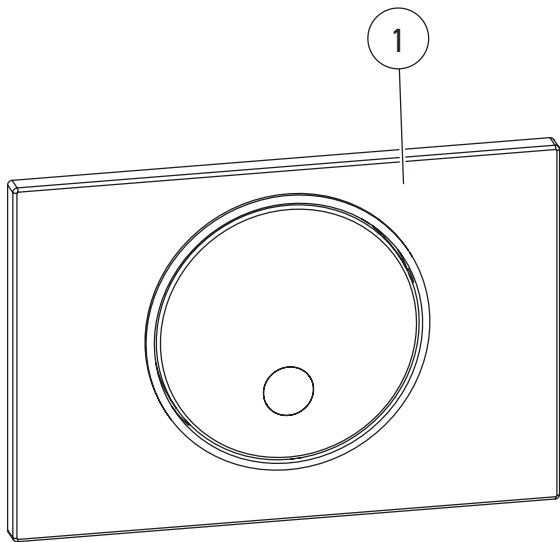


Part no.	Ref.	Quantity
1	SAN-46748	1
2	SAN-48320	1

Installation

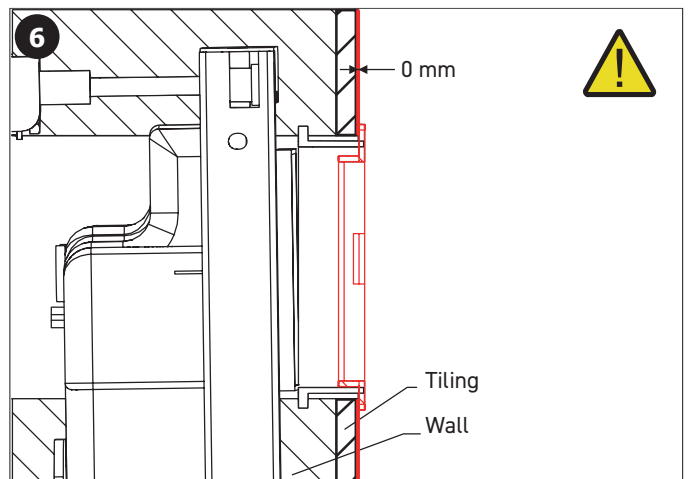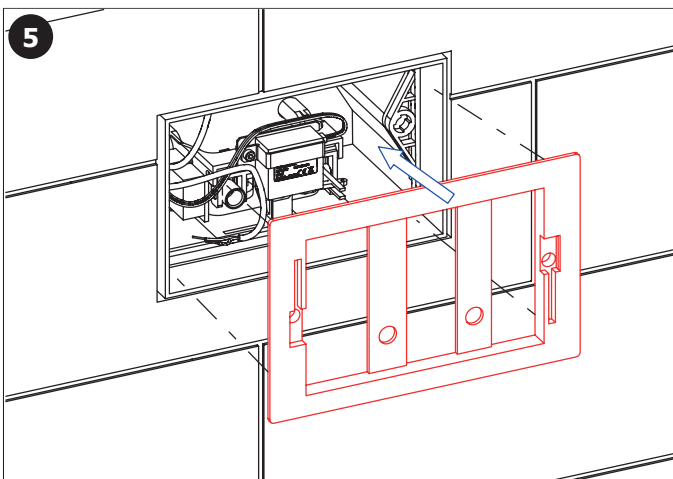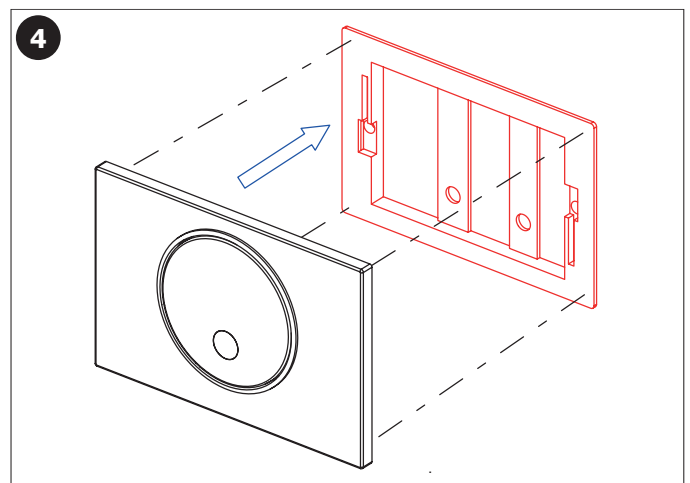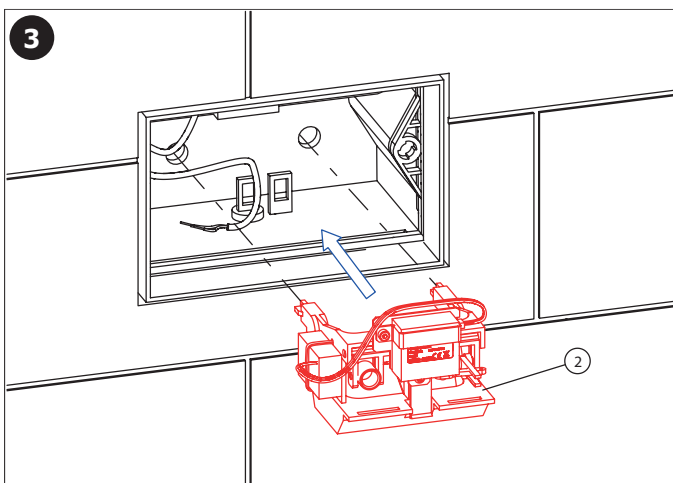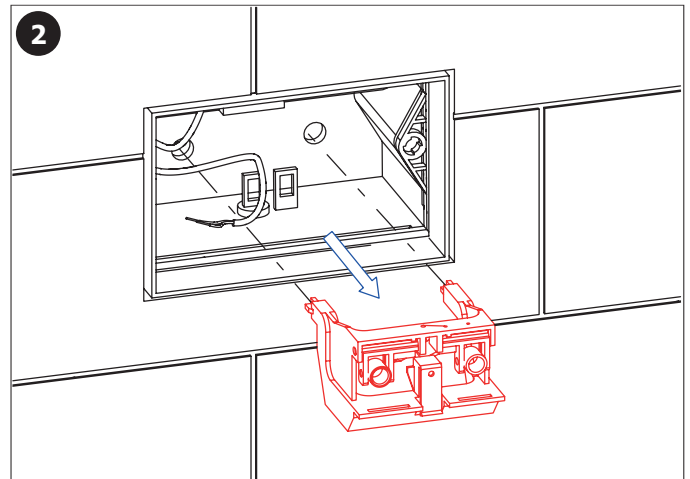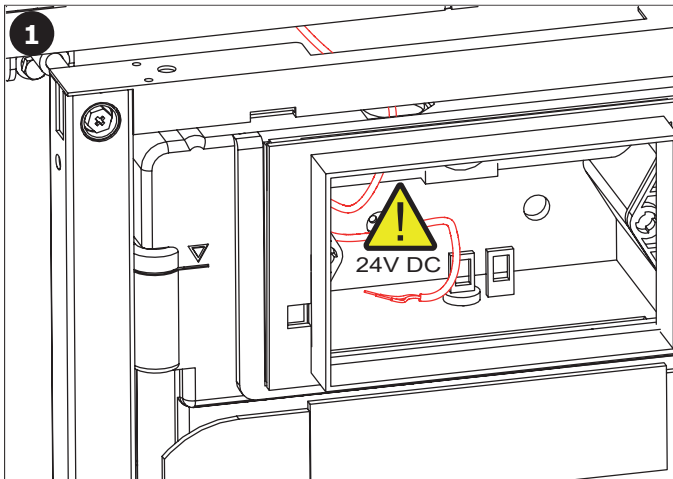

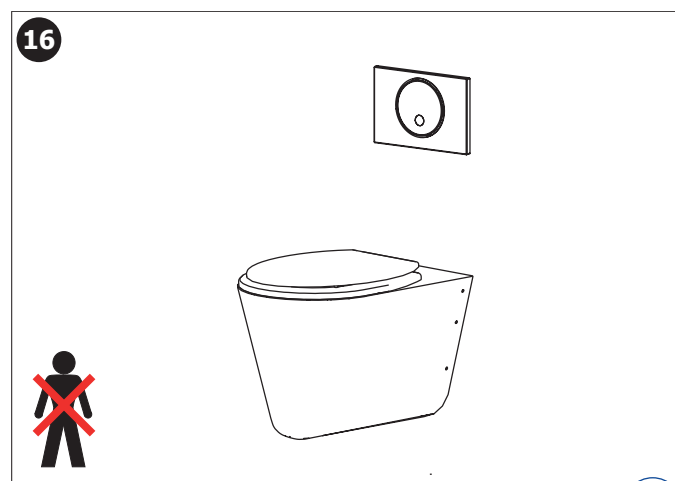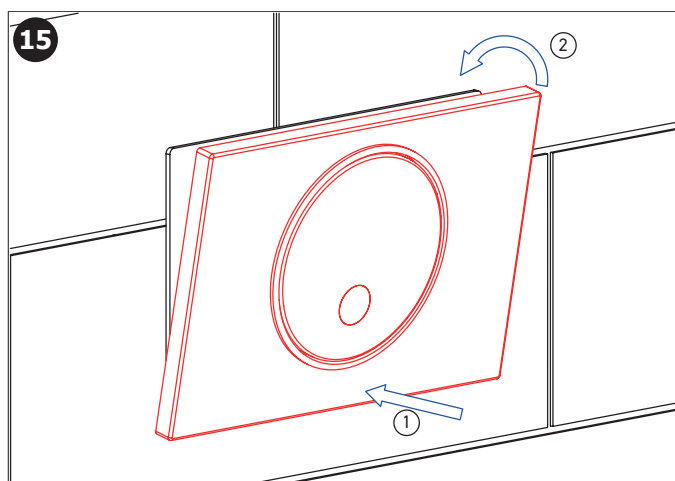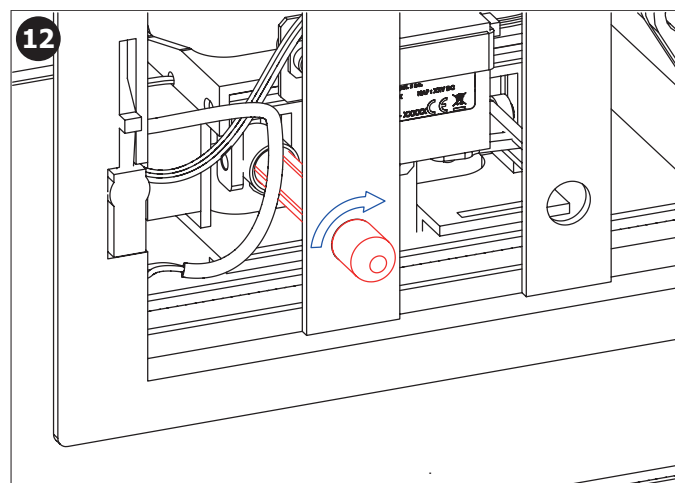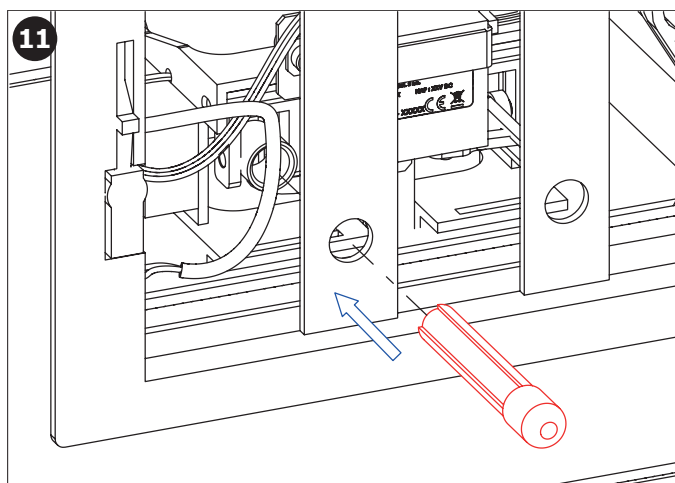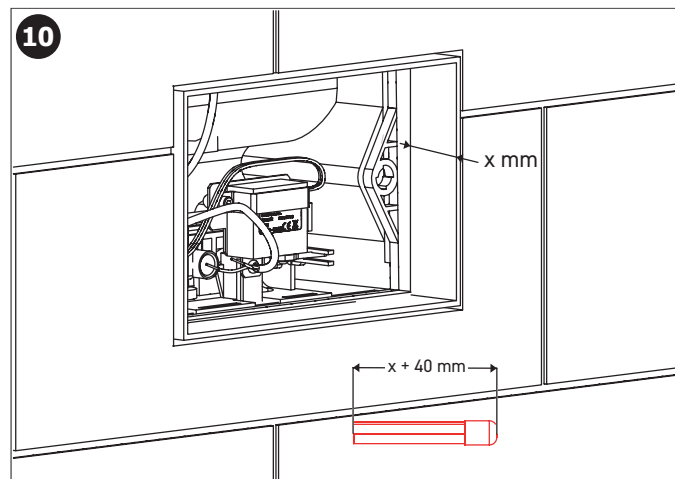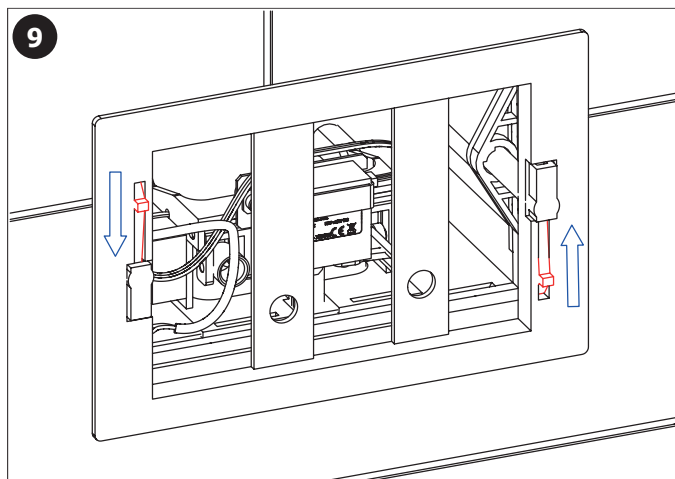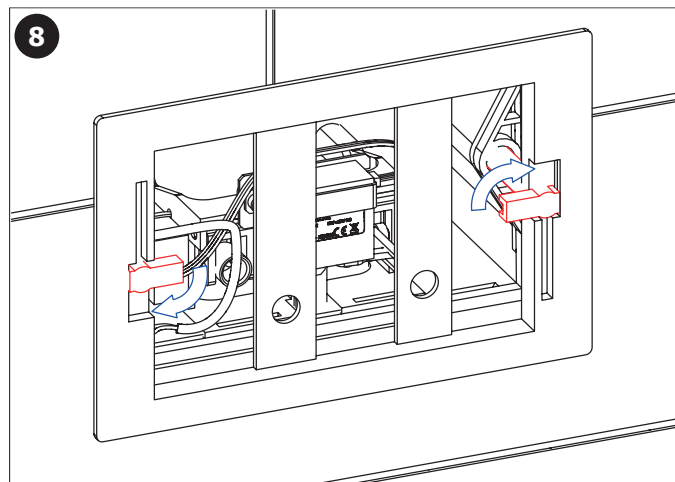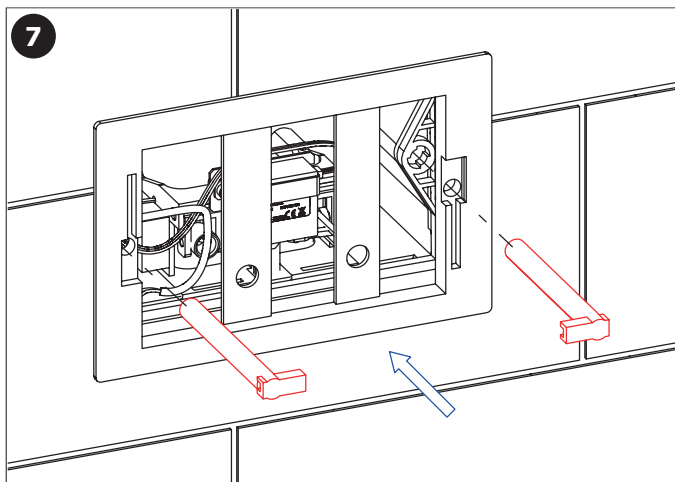


17



It is necessary, for the proper function, to keep the unit **under constant voltage** (don't connect the power supply unit behind the switch into the light circuit !)

18



AUTOMATIC ADJUSTMENT 10 s.

MAINTENANCE

It is necessary to proceed according to the law about packaging material after unpacking of the product.

Producer assures that this product has declaration of conformity in accordance with the regulation 73/23/EHS and 92/31/EHS.

RECOMMENDED ACCESSORIES

Ref. SLD03 : Remote control for adjustments of parameters of all products with infra-red sensor

Ref. SPZ01 : Power supply 24 V DC for operating of max. 2 pcs. of flushing units

Ref. SPZ04Z : Power supply 24 V DC for DIN rail, for operating of max. 2 pcs. of flushing units

Ref. SPZ04X: Power supply 24 V DC for DIN rail, for operating of max. 3 pcs. of flushing units



02 47 92 23 31



info@autosanit.com



02 47 92 84 71



www.autosanit.com