

Ultra-slim electric hand dryer

References: **SM-7120** / **SM-7128**

Description

Stainless steel hand dryer with optical sensor, 10 cm depth for minimal wall projection.

Dual air outlets create a swirling airflow for a comfortable hand-drying experience in under 25 seconds with low noise operation.

Contemporary design, long-lasting performance, and accessible for PRM.



Features

AISI 304 stainless steel cover with brushed finish or high-gloss white epoxy steel with black plastic fittings.

Infrared sensor: activates drying when hands are detected.

Automatic safety shut-off after 90 seconds of continuous use.

Sound level: 71 dB.

Air speed: 30 m/s (108 km/h).

Airflow: 130 m³/h.

Power: 1700 W.

Voltage: 230 V, 7.5 A. Frequency: 50/60 Hz.

Electrical insulation: Class I.


Universal motor, 1/7 HP, 8000 rpm, with thermal safety cut-off.

Heating element with automatic thermal safety.

CE certified, cULus listed, VDE approved.

Dimensions: W350 x D100 x H345 mm.

10 year warranty (motor brushes 3 years).

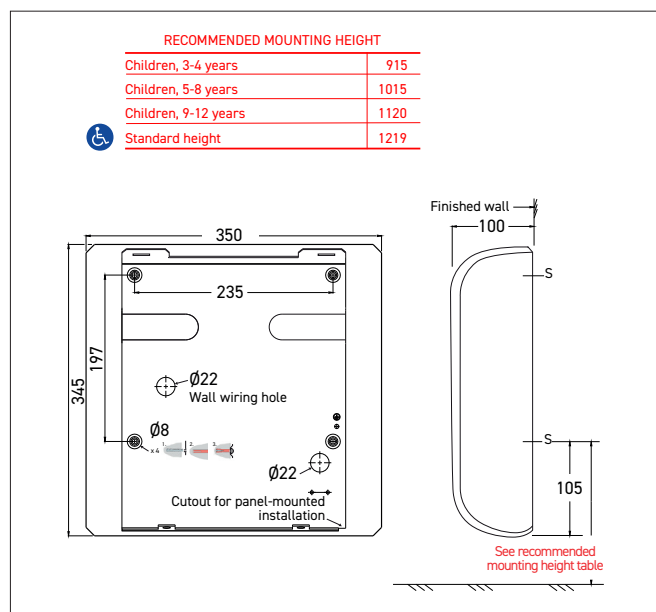

References model choices

- **SM-7120** white epoxy finish
- **SM-7128** stainless steel, brushed finish