

Shower panel with token-operated timer

Reference: **SA-28**

Description

Stainless steel wall-mounted shower panel with token-operated timer, for cold or pre-mixed water.

After inserting an SA-52 token into the panel, the shower is triggered as soon as the user presses the piezo-sensitive button.

The water flows with 10 red LEDs initially lit on the indicator, which are gradually extinguished according to the shower time.

The user can start and stop the water directly in the shower.

30 % of the time before the shower stops, the user is warned by a brief interruption in the water flow.

Features

Brushed finish stainless steel AISI - 304 material.

Piezo stainless steel release button.

Vandal-proof showerhead, 20° adjustable angle.

Parameter settings via SLD04 remote control (shower duration, on/off, periodic rinsing).

Power supply via external transformer 230/24V.

Power consumption 7 W.

Integrated receptacle for tokens with lock, emptying from below.

Periodic hygiene rinse.

Threaded water inlet M1/2" (optional from above).

Integrated solenoid valve.


Angle stopcock with filter.

Flow rate 18.5 L/min (including 6 L/min and 12 L/min limiters).

Recommended pressure 1-6 bar.

Dim.: W220 x D93 (143 with shower head) x H1050 mm.

CE. Electronics 5-year warranty.

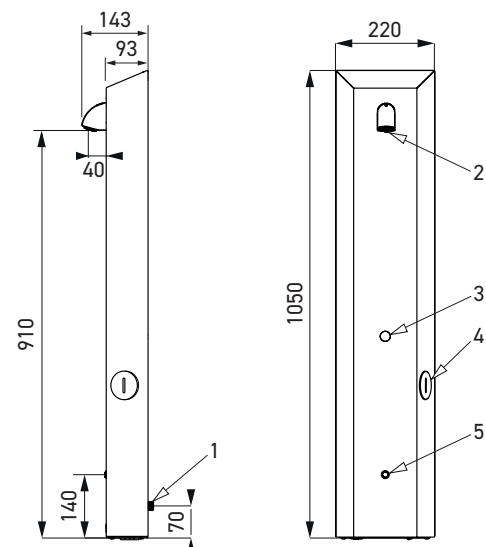

Reference

Shower panel

- **SA-28** shower panel with token-operated timer

Options

- SPZ02 230/24V transformer box up to 5 showers
- SPZ01 230/24V transformer box up to 9 showers
- SPZ04Y 230/24V transformer box on DIN rail up to 5 showers (max. 9 or 15 showers on request)
- SA-52 Set of 50 tokens
- SLD04 Remote control