

Stainless Steel Trough Urinal with Hidden Flushing Unit and integrated thermic flushing unit, 1 user



Reference: **SPN-1TB**

EN ISO 9001:2015




Ref. SPN-1TB

Operation

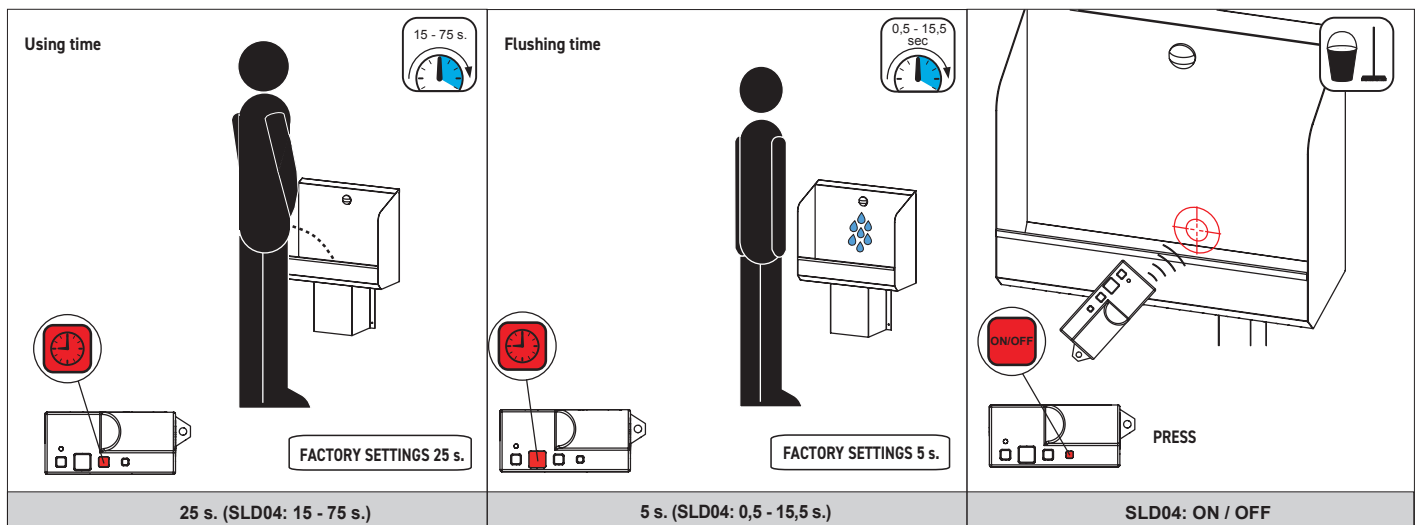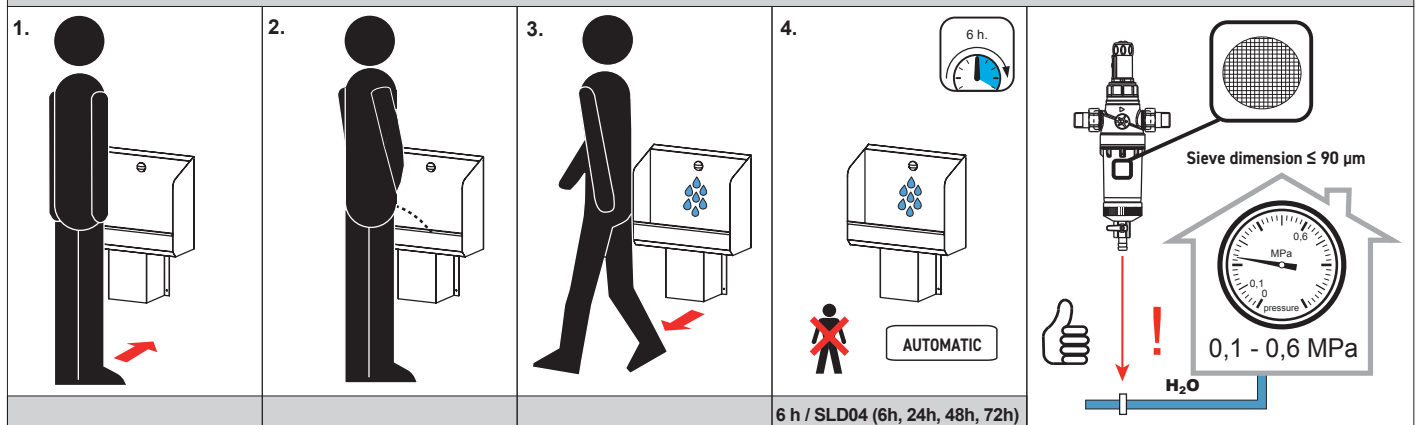


MOUNTING INSTRUCTIONS

Supplied equipment






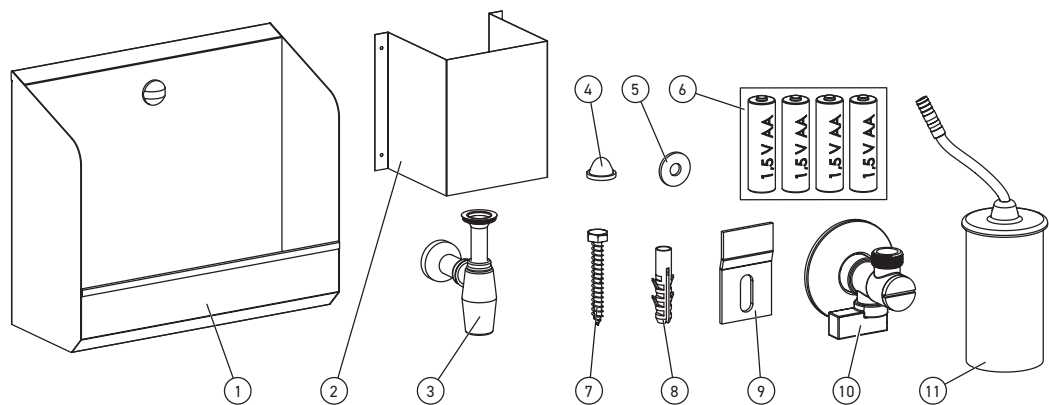









Part no.	Ref.	Quantity
1		1
2	SAN-46887	1
3		1
4	SAN-46268	1
5	SAN-45836	8
6	SAN-6360	1
7	SAN-45847	8
8	SAN-45782	8
9	SAN-45780	2
10	SAN-45940	1
11	SAN-46741	1







Dimensions

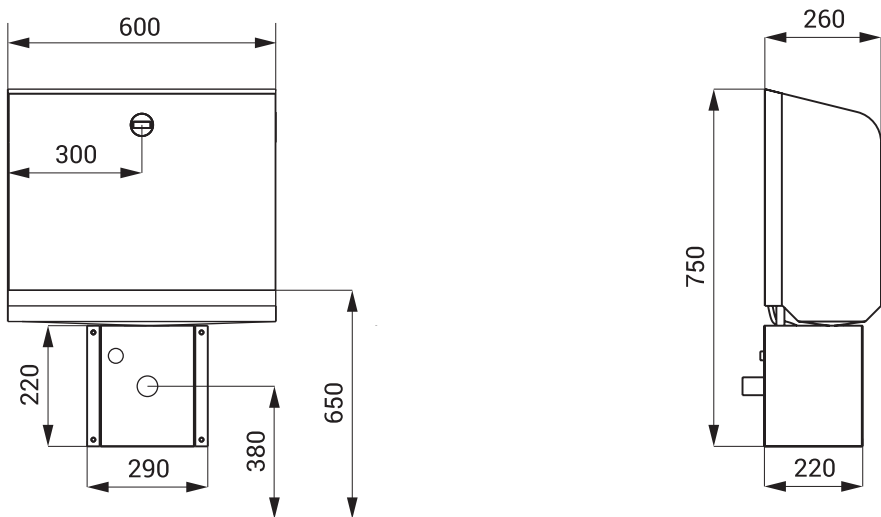


Installation

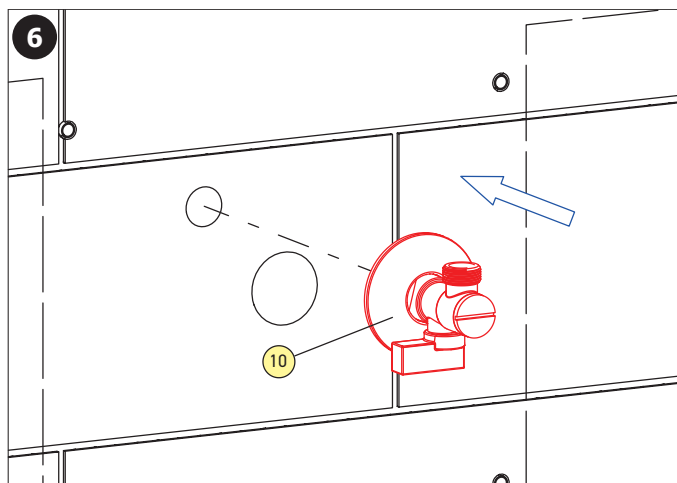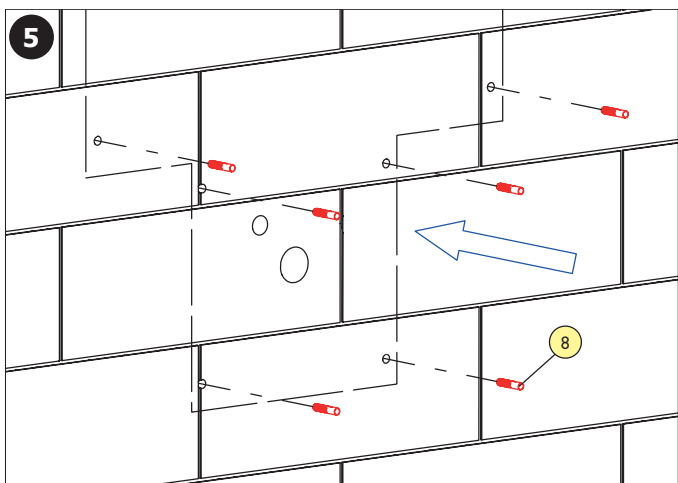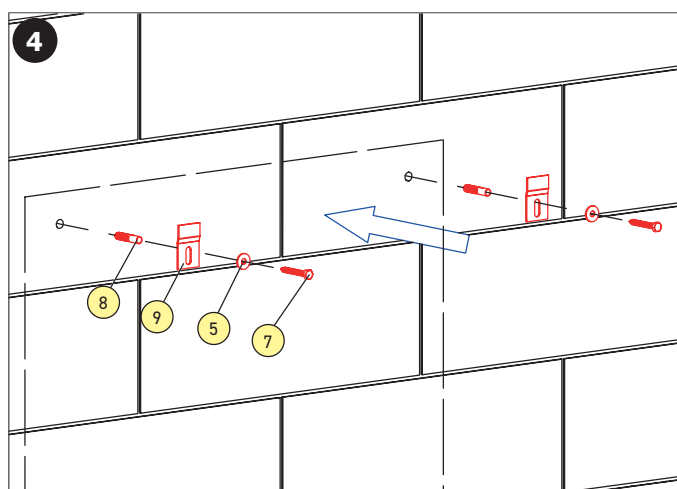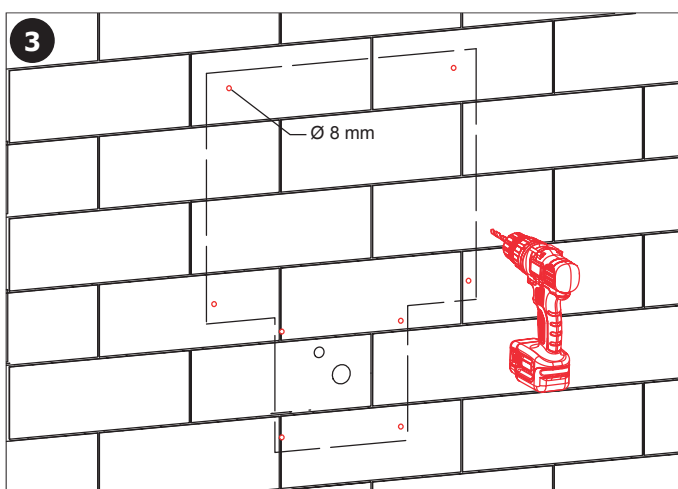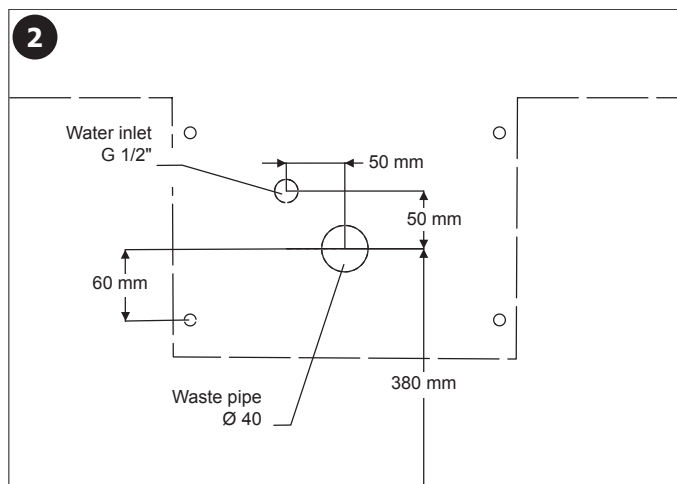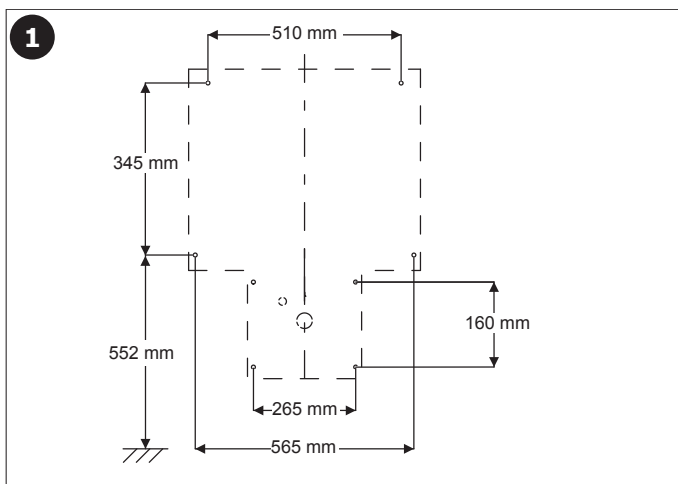

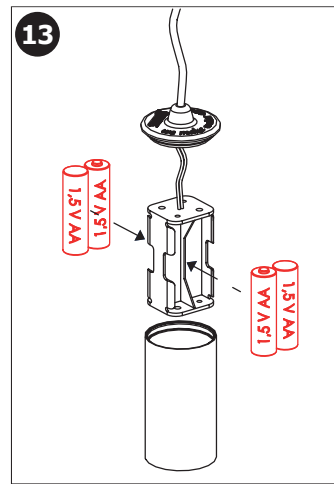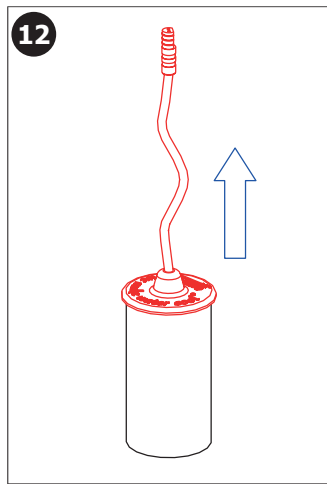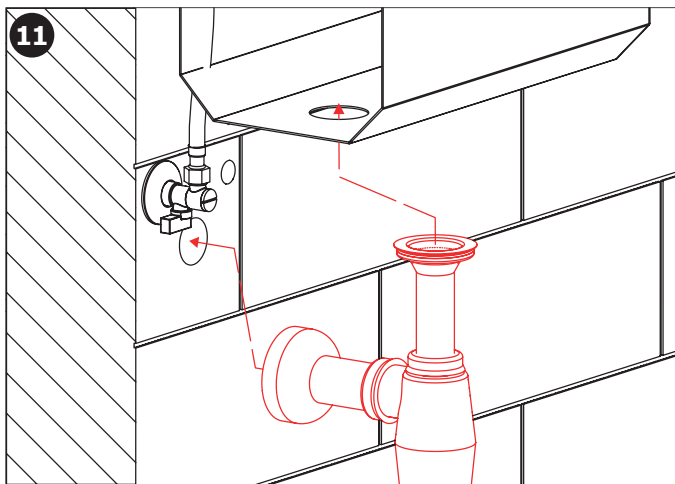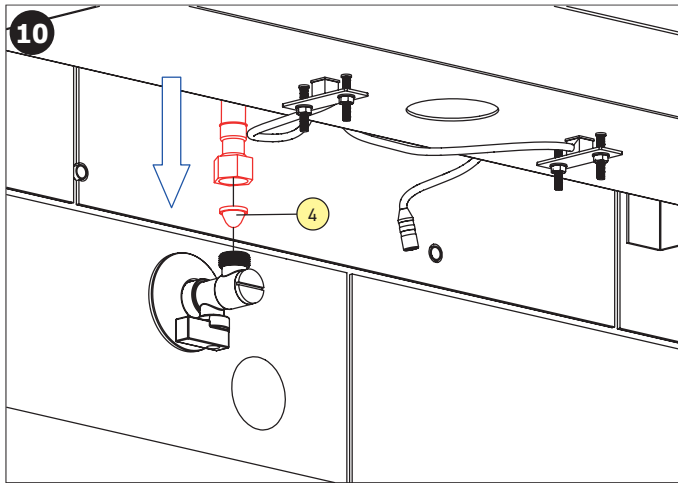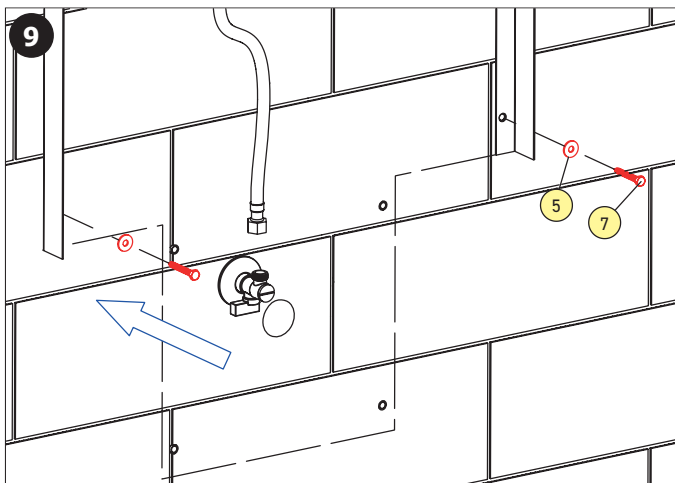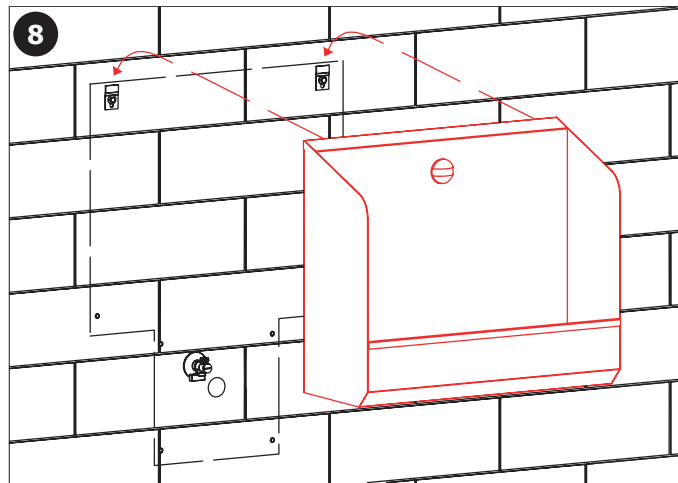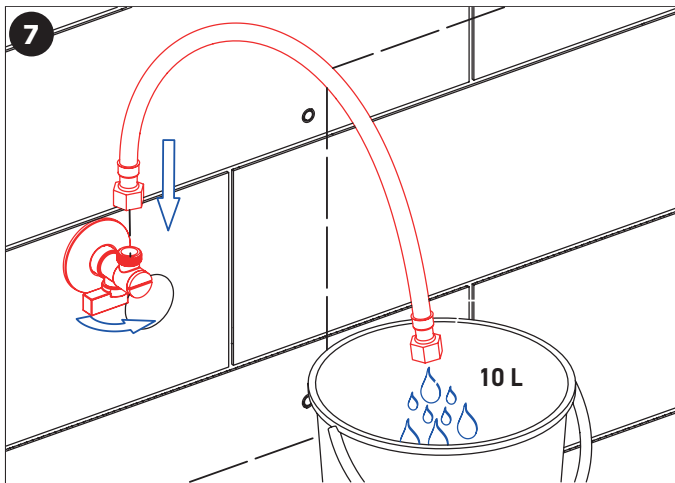

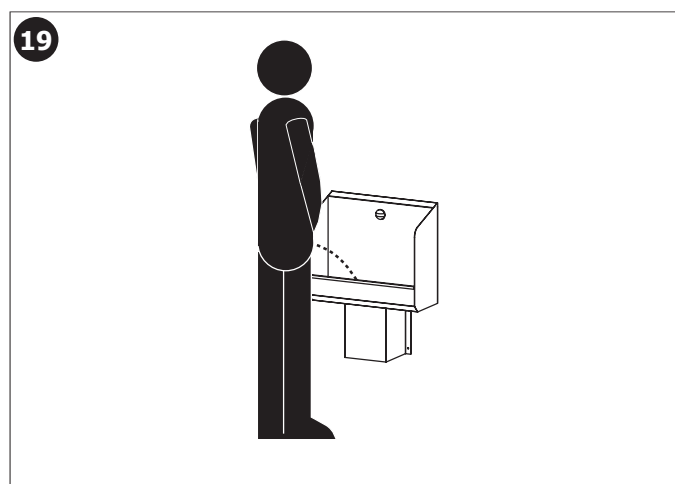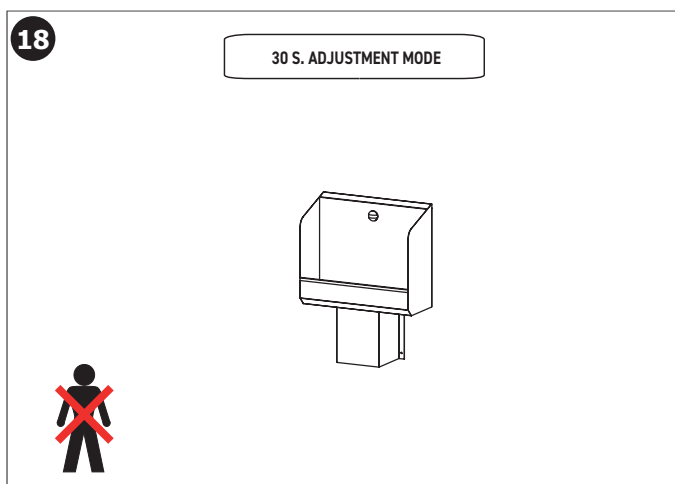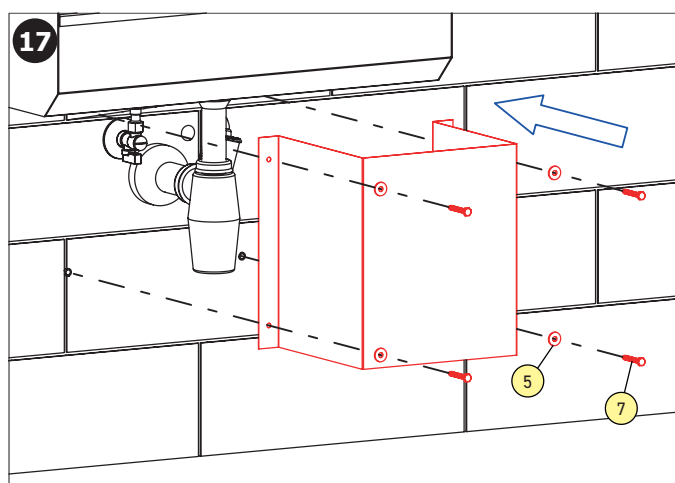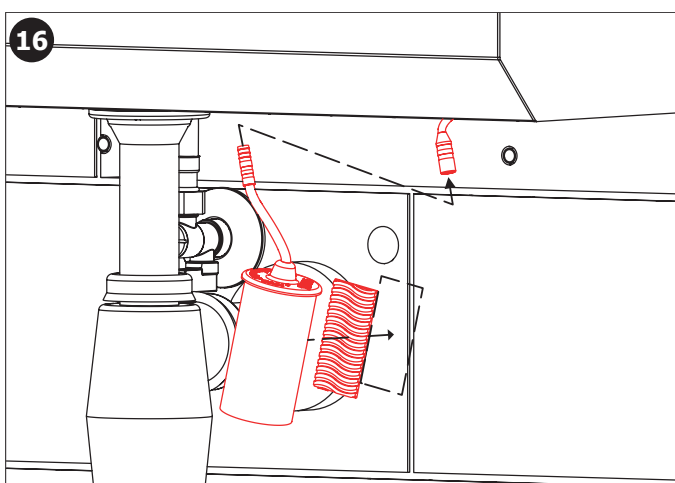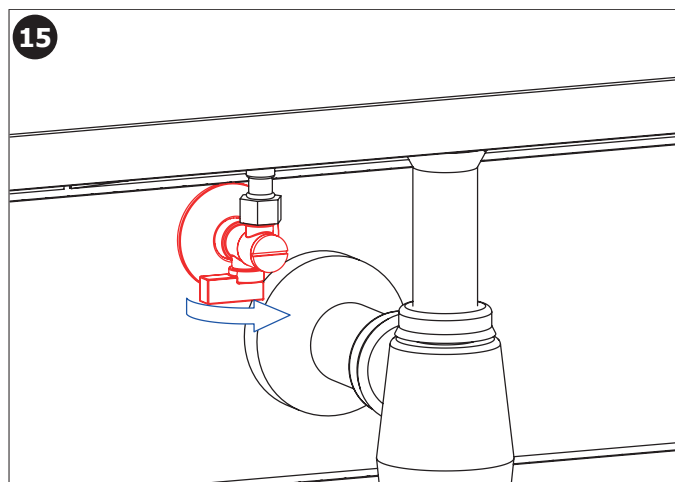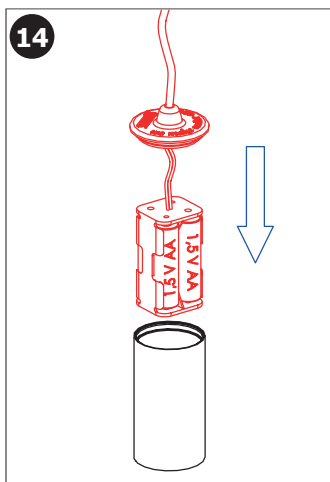

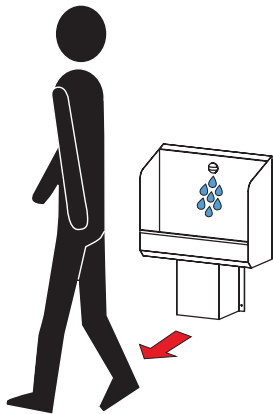

Battery capacity control

	INDICATION	ELECTRONIC SYSTEM	BATTERY EXCHANGE
 10-0% Capacity	 0,5 1 1,5 x+0,5 t [sec]	ON	RECOMMENDED
 0% Capacity	 t [sec]	OFF	NECESSARY

MAINTENANCE

To keep the solenoid valve clean and working properly, it is recommended that the solenoid valve filter be checked for debris/dirt once a year.

It is also recommended that the screws and wiring are checked for tightness once a year.

All stainless steel components should be cleaned with soapy water and a soft cloth **ONLY**.

The use of abrasive and aggressive products are strictly prohibited!!

Packaging should be disposed of in accordance with local laws and regulations.

The manufacturer declares that this product has a declaration of conformity in accordance with regulations 73/23 EHS and 92/31 EHS.

RECOMMENDED ACCESSORIES

Ref. **SLD04** : Remote control for adjustments

Ref. **SLA36** : Set of 4 pcs. alkaline batteries