

RONDEO wall-mounted stainless steel electronic mixer tap

References: **RES-24-S1** / **RES-25-S1** / **RES-34-S1** / **RES-35-S1**

Description

Touch free wall-mounted AISI 316 brushed stainless steel finish electronic faucet with temperature control for hot and cold water.

Optimal durability of the faucet surface (scratch resistance, UV protection, fingerprint resistance, etc.), ensuring a long-lasting and flawless appearance for your washrooms.

The brushed streaks give it a matte, contemporary look.

316 stainless steel is particularly appreciated for its bacteriostatic properties in the medical field and its anti-corrosion properties in marine environments.

Stainless steel is environmentally friendly and fully recyclable.



RONDEO soap & water

Features

The unit has a self-adjusting infrared sensor which can also be adjusted by remote control (sensor range, flow time, hygiene rinse, temporary off, safety time, reset...).

Powered by 9V battery or 230/9V transformer.

Low battery indicator for replacement.

Security stop after 90 seconds without interruption.

Periodic hygiene rinse.

AISI 316 brushed stainless steel spout Ø38 mm L170 mm (optional L220 mm).

Adjustable NEOPERL aerator to optimise jet direction, with limited 6 LPM flow rate (3 LPM, 1.9 LPM or 1.3 LPM on demand).



Limescale protection.

Panel mounted installation with rear access, through max. 35 mm wall, and external M $\frac{1}{2}$ " solenoid valves and filters, or recessed installation with flush-mounted box including solenoid valves, shut off valves, filters and a stainless steel front panel, recommended under the washbasin.

Hot and cold water supply.

Water pressure: 0.3 – 8.0 bars / Maximum temperature: 70°C.

CE. ACS. 3 year warranty.

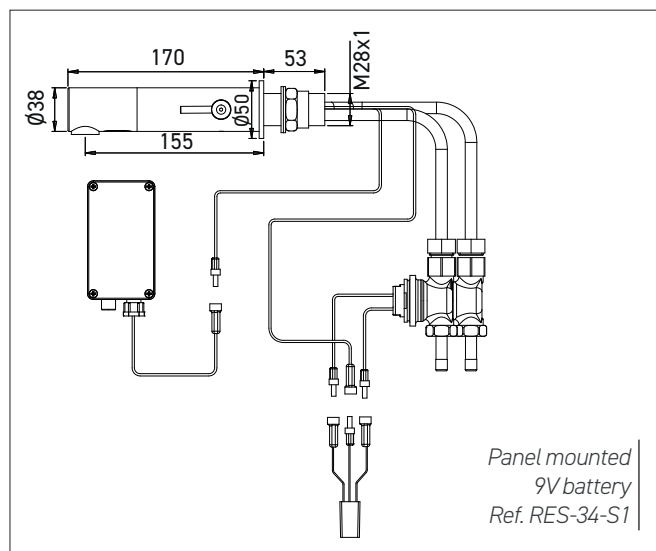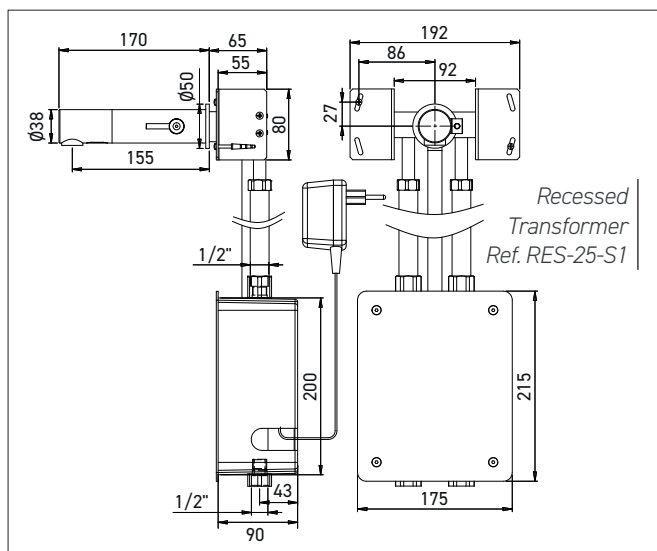

References model choices

RONDEO electronic mixer tap

- **RES-24-S1** recessed, 9V battery
- **RES-25-S1** recessed, 9V transformer
- **RES-34-S1** panel mounted, 9V battery
- **RES-35-S1** panel mounted, 9V transformer

Options

- RES-31 Remote control
- Limited flow rate 1.3, 1.9 or 3 LPM
- Longer L version spout 220 mm
- RES-294 IP 68 transformer to supply up to 4 faucets
- RES-295 Junction box to supply up to 10 faucets
- Matching soap dispenser and hand dryer
- Integrated on washbasin iron support frame