


Coin or token operated door lock system
Ref. SA-40

CE
EN ISO 9001:2015





PACK CONTENTS




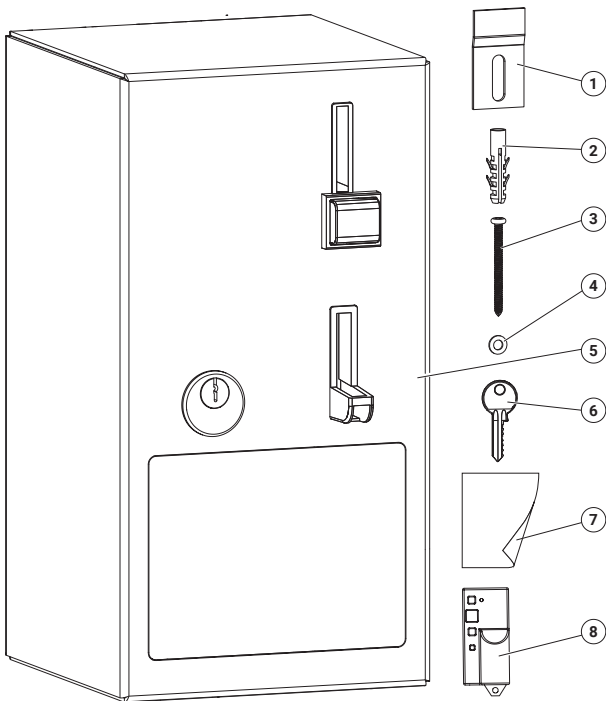


Part n°	Ref	Quantity	Note
1	SAN-45780	2	
2	SAN-45782	3	
3	SAN-45840	3	
4	SAN-45796	3	
5	SAN-47058	1	
6		2	
7	SAN-48189	1	Userguide
	SAN-47019	1	Circuit diagram
8	SAN-07050	1	









DIMENSIONS

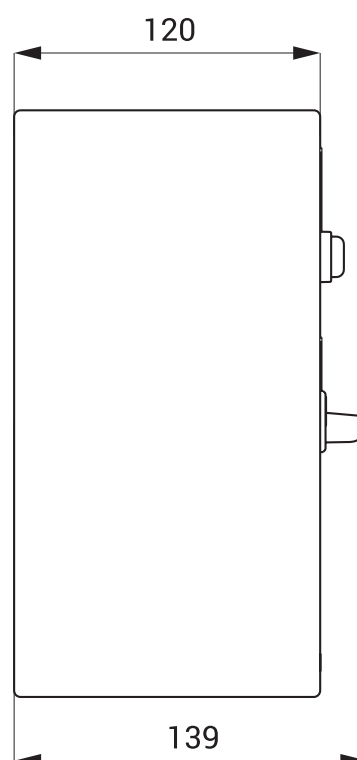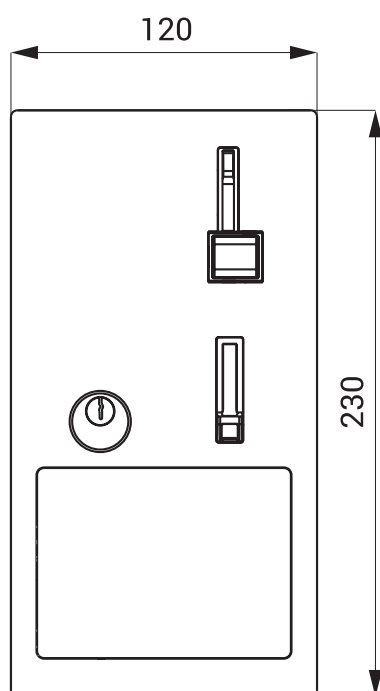



INSTALLATION

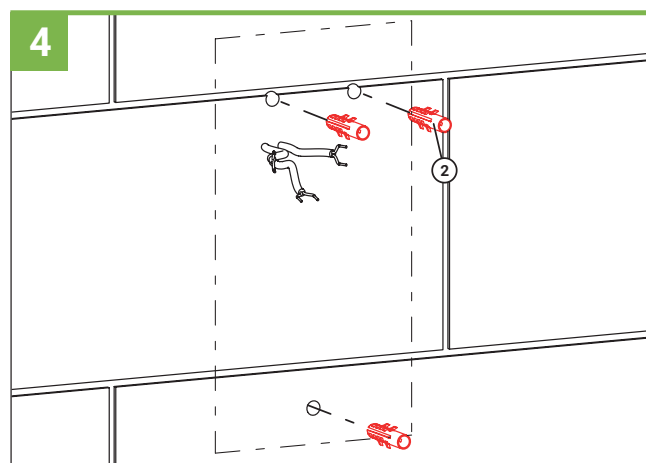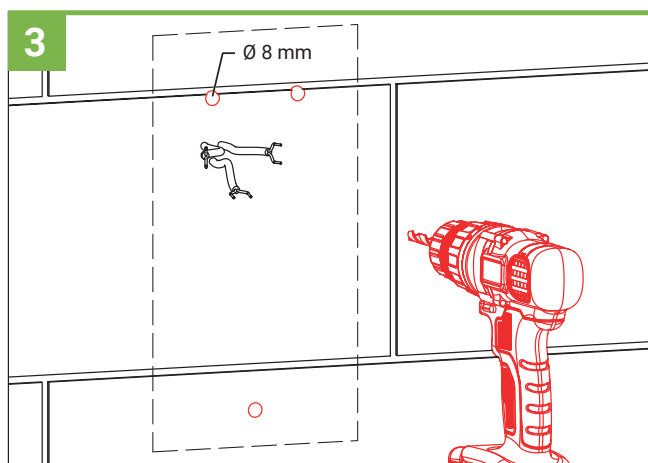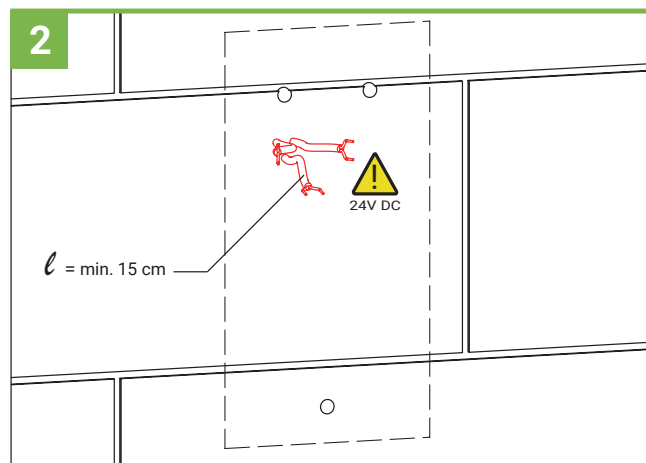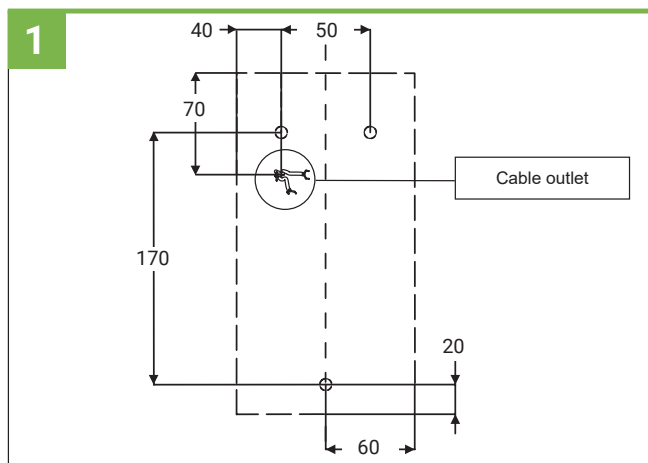


INSTALLATION

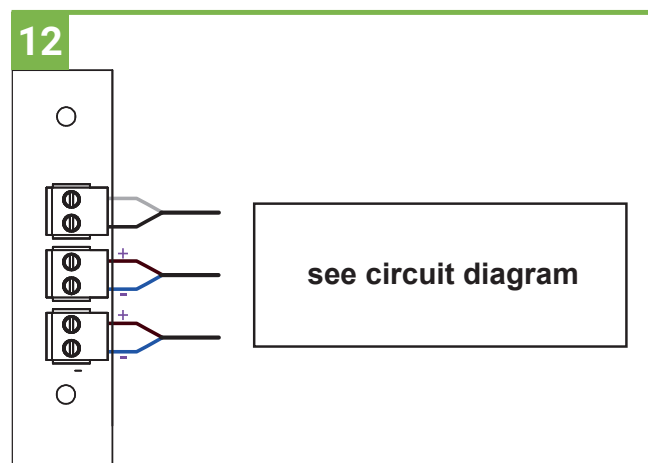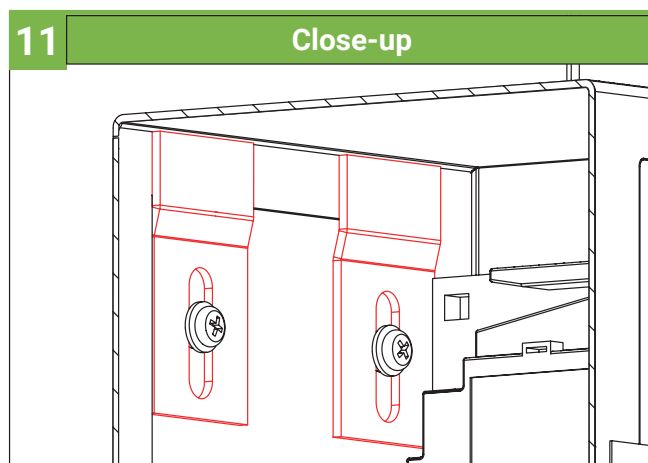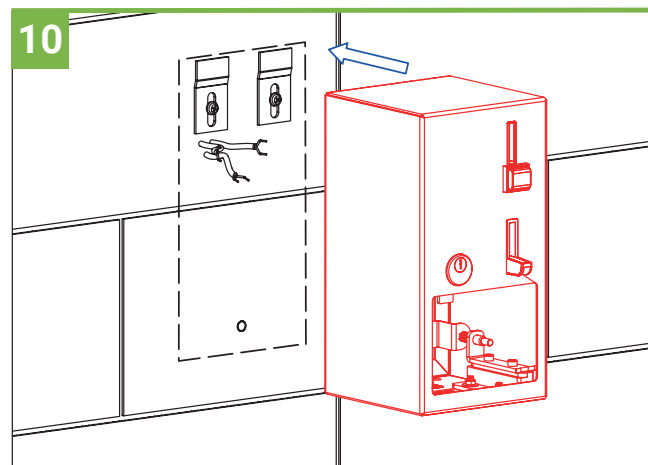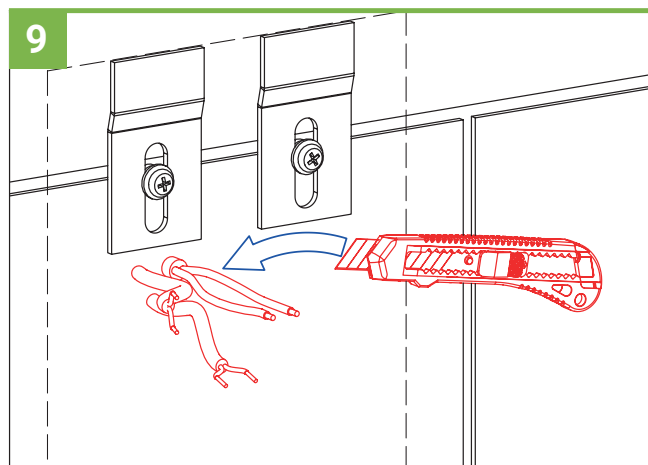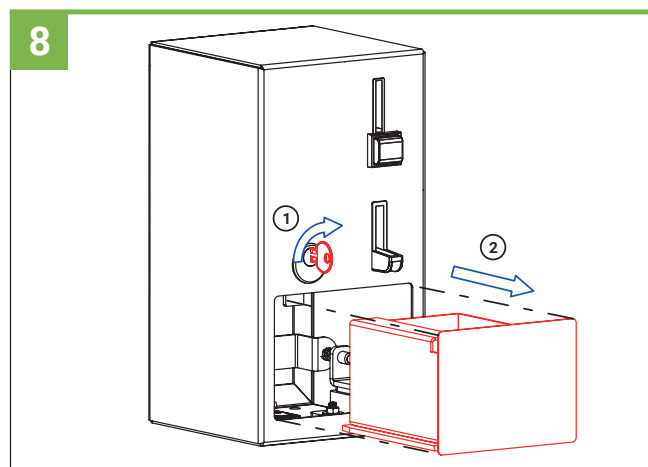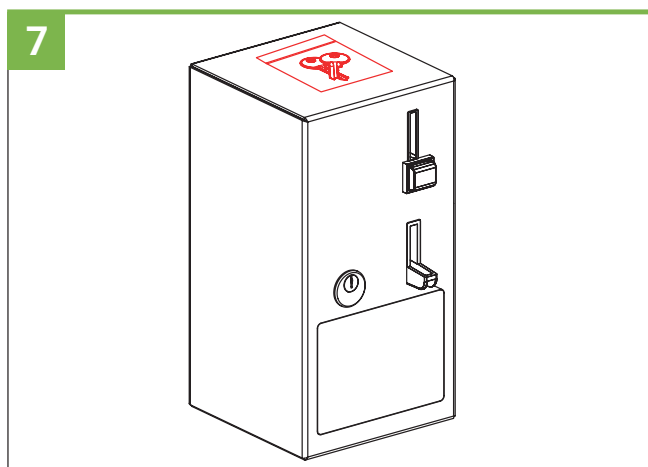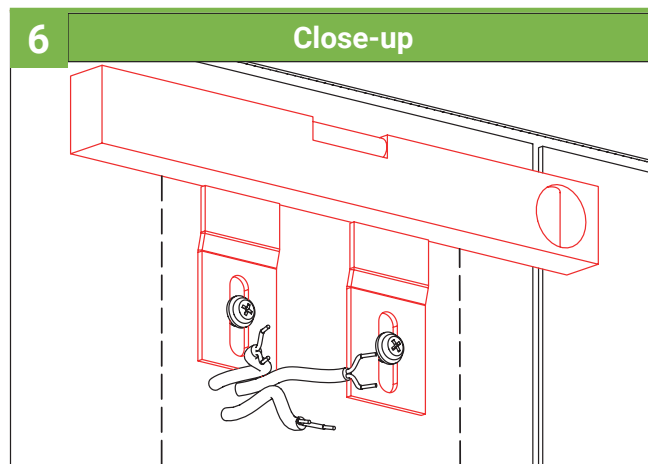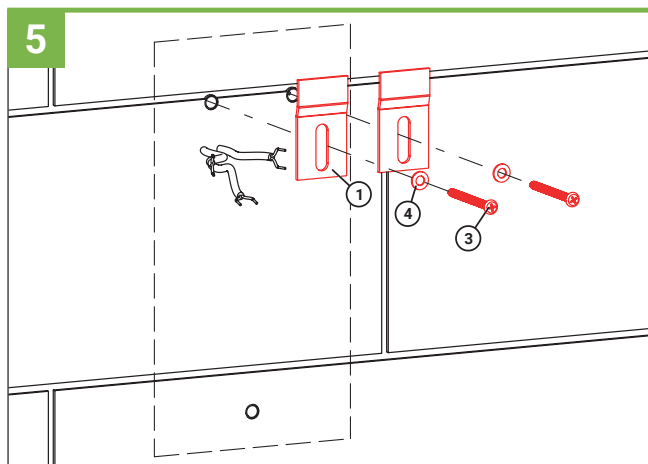

INSTALLATION

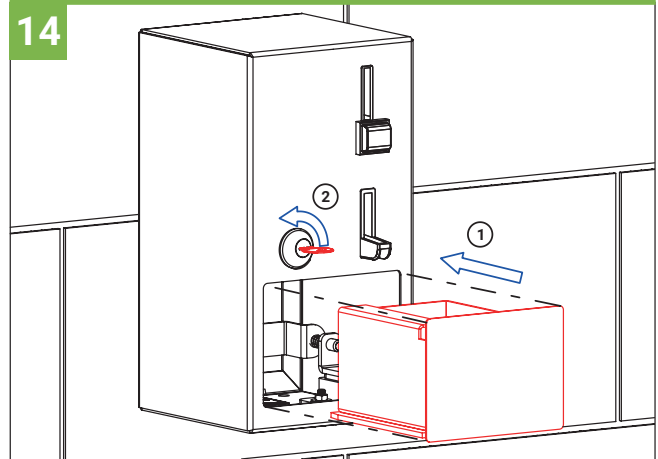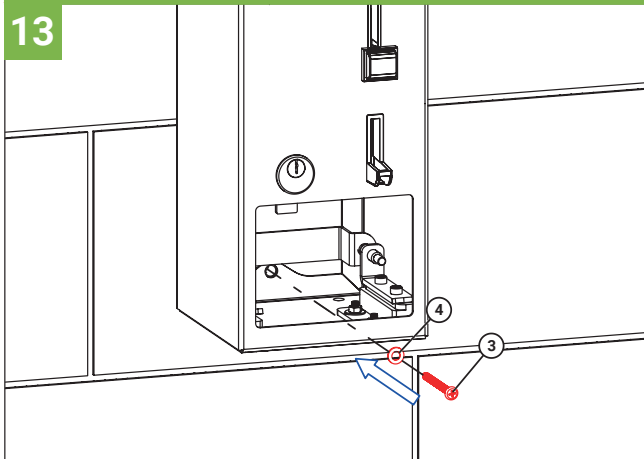

15

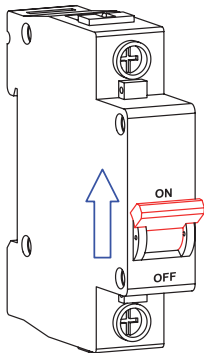

To ensure proper operation, the unit must be kept under constant voltage (do not connect the power supply unit behind a switch)!

MAINTENANCE

All stainless steel components should only be cleaned with soapy water and a soft cloth. Aggressive and abrasive products are strictly prohibited.
Comply with local regulations for the disposal of packaging.
Manufacturing complies with regulations 73/023/EEC and 89/336/EEC.
Door lock must be installed in zone 3 according to installation standard HD 60364-7-701: 2007.
The manufacturer recommends regular opening of the coin compartment.

RECOMMENDED ACCESSORIES

Ref. **SLD05**: Remote control
Ref. **SPZ01**: 230/24V transformer box
Ref. **SPZ04Y**: 230/24V transformer on DIN rail
Ref. **SA-50**: pack of 50 tokens
Ref. **...-V**: EUROKEY PMR free access