

Free-standing stainless steel urinal with concealed automatic flushing

References: **URPX-600P-TH / URPX-1200P-TH / URPX-1800P-TH**



Description

Modular free-standing stainless steel urinals for series, L-shaped or U-shaped installations, with invisible electronic thermal activation = aesthetic, simplified installation and vandal-proof.

The system activates rinsing when it detects a change in temperature (heat from urine).

Siphon-free system for maximum reliability; no risk of damage from liquids.

Hygiene = touch-free and eliminates unpleasant odours.

Designed for heavy-duty use and vandal resistance.

Full rinsing via perforated stainless steel rail, water wall effect: accessible plumbing connection and removable rinsing rail for maintenance.

ECO modes for significant water savings:

ECO 1: Reduction in the number of rinse cycles during periods of heavy use (schools, performance venues, stadiums...).

ECO 2: The urinal is rinsed after each use, but not always with the same volume of water.

Parameters adjustable according to frequency of use.

Features

Communal urinal stall in AISI 304 stainless steel, brushed finish, stainless steel thickness 1.2 mm.

Integrated thermal sensor with solenoid valve, angled stop valve with filter. Adjustable flush duration from 0.5 to 15.5 s.

Powered by external 230/24 V transformer (6V batteries optional). Power consumption 7 W on mains (3 W on batteries).

Settings adjustable by SLD04 remote control (flush duration, sensitivity, on/off...).

Automatic flush after 24 hours without use.

Pressure 1-8 bar. Flow rate 12 L/min. at 3 bar.

Central 1/2" water inlet with accessible plumbing connector.

Drainage via central 1 1/2" drain Ø40 mm. Trap included.

Floor-standing, trap accessible via access panel.



Dim.: W600 to 1800 x D240 x H1225 mm.

CE. Electronics guaranteed 5 years.

References

Automatic stainless steel free-standing urinal

- **URPX-600P-TH** **600 mm**
- **URPX-1200P-TH** **1200 mm**
- **URPX-1800P-TH** **1800 mm**

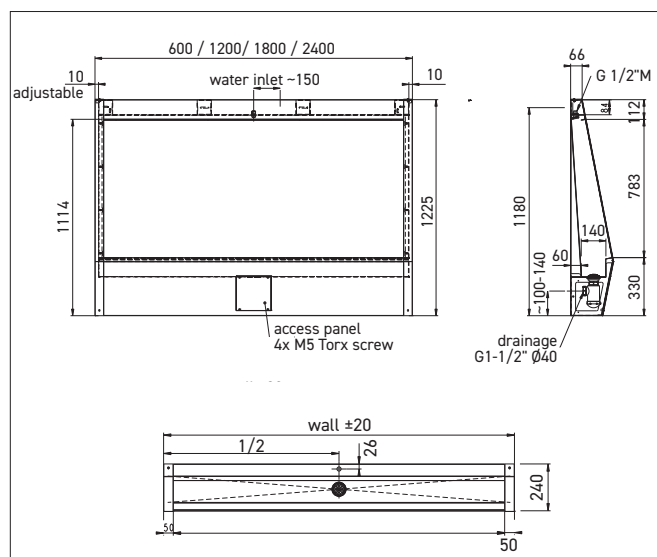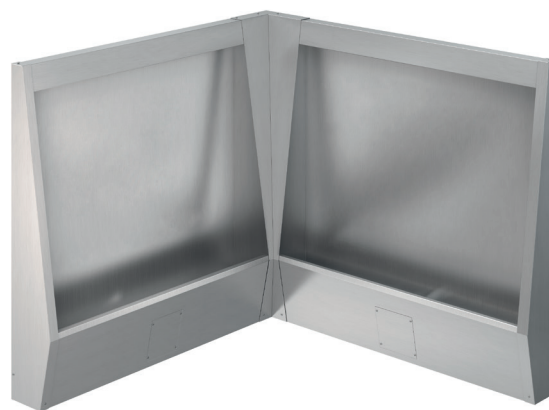

Options

- URPX-JP Junction cover between urinals
- URPX-ANGP 90° corner cover or custom-made
- URPX-LAT-GP/URPX-LAT-DP
Side cover for exposed sides, not mounted against a wall (GP= left side, DP= right side)
- URPX-SEPP Stainless steel partition
- ...-TB Battery-powered version

