

ONE stainless steel automatic foam soap dispenser

Reference: **RES-56M-S1**

Description

Design deck-mounted foam soap dispenser with concealed infrared sensor at the tip of the spout, in brushed AISI 316 stainless steel.

Touch free, protects against cross contamination. Recommended for installations where ease of maintenance and durability are prioritized (resistant to scratches, UV, and fingerprints...).

Minimalist, modern design.

Drastic reduction in soap consumption: precise, even soap dosage, automatic stop without dripping.

Soap and air dosage to increase foaming effect, adjustable by remote control.

Peristaltic pump: the soap passes through a tube without coming into contact with the pump, preventing contamination and backflow.

Easy to install and refill.

A cost-effective solution combining quality and impeccable hygiene of your sanitary facilities.

Features

Activated by infrared sensor.

Mains powered, via 230/12V transformer.

Brushed AISI 316 stainless steel body (high corrosion resistance and bacteriostatic).

1L refillable tank and wall support (6L tank option).

Operates with peristaltic pump and air compressor for foaming effect.


Soap viscosity 0-100 cPs, pH level 6.5 to 8.5.

Standard deck-mounted installation with under-sink tank.

Wall-mounted support for pump and tank.

Optional RES-39 remote control for adjusting soap quantity, air volume (foaming effect), priming after refill, temporary shut-off, and reset

CE. 3-year warranty.

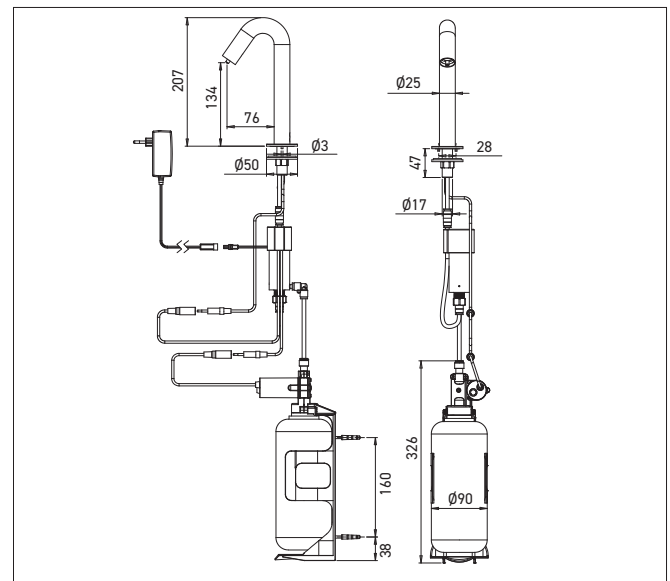

Reference

ONE stainless steel automatic foam soap dispenser

- **RES-56M-S1** on mains



Options

- RES-39 Settings remote control
- RES-790 6L soap tank to supply up to 6 soap dispensers
- RES-797 5L non-proprietary soap tank adapter cap kit to supply up to 3 dispensers
- RES-294 IP68 transformer to supply up to 4 soap dispensers
- RES-296 Junction box to supply up to 10 soap dispensers
- Matching automatic faucet