

ONE automatic foam soap dispenser

Reference: **RES-56M**

Description

Deck-mounted foam soap dispenser with concealed infrared sensor at the tip of the spout: delivers a dose of soap with a simple hand approach, without any germ transmission.

Drastic reduction in soap consumption: precise, even soap dosage, automatic stop without dripping.

Soap and air dosage to increase foaming effect, adjustable by remote control.

Peristaltic pump: the soap passes through a tube without coming into contact with the pump, preventing contamination and backflow.

Easy to install and refill.

A cost-effective solution combining quality and impeccable hygiene of your sanitary facilities.

Features

Activated by infrared sensor.

Mains powered, via 230/12V transformer.

Chrome-plated brass body Ø25 mm.

1L refillable tank and wall support (6L tank option).

Operates with peristaltic pump and air compressor for foaming effect.

Soap viscosity 0-100 cPs, pH level 6.5 to 8.5.

Standard deck-mounted installation with under-sink tank.

Wall-mounted support for pump and tank.

Optional RES-39 remote control for adjusting soap quantity, air volume (foaming effect), priming after refill, temporary shut-off, and reset


CE. 3-year warranty.



Reference

ONE automatic foam soap dispenser

- **RES-56M** on mains

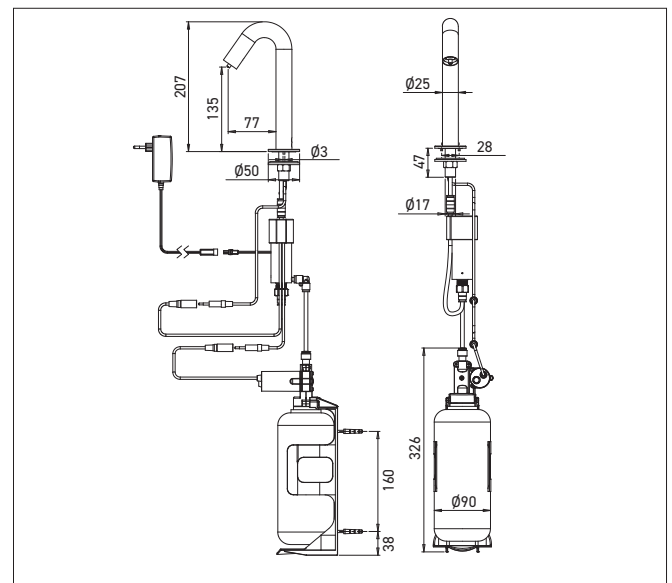

Options

- Finishes Matt Black, Brushed Nickel PVD, Copper PVD, Matt Gold PVD (please consult us)
- RES-39 Setting remote control
- RES-790 6L soap tank to supply up to 6 soap dispensers
- RES-797 5L non-proprietary soap tank adapter cap kit to supply up to 3 dispensers
- RES-294 IP68 transformer to supply up to 4 soap dispensers
- RES-296 Junction box to supply up to 10 soap dispensers
- Matching automatic faucet
- Dispenser with soap level indicator light (green/orange/red)

