

## Wall-mounted stainless steel drinking fountain with touch-free faucet

References: **FB-004E / FB-005E**

### Description

Wall-mounted stainless steel drinking fountain with mouth rinse faucet with touch-free automatic water jet activation.

Ease of use and improved hygiene, reducing the risk of cross contamination.

Backsplash to protect the wall from water and facilitate cleaning.

Closed underside for invisible drainage and additional protection against vandalism or dirt accumulation.

Designed for indoor use in high-traffic areas such as schools, offices, train stations, airports, department stores, communal catering, hospitals, sports halls, etc...



FB-004E

### Features

Fountain in AISI 304 stainless steel, 1 mm thickness, brushed or polished finish.

Stainless steel faucet with infrared sensor powered by 230/24V transformer or 6V batteries.

Adjustable flow rate (min. 0.4 L/min.).

STANDARD operating mode = water flows as long as a person or object is within the detection area

or ON/OFF operating mode = water flows when the hand is brought 5-10 cm close to the sensor and stops after a set time or earlier, by bringing the hand close again.

Solenoid valve, hoses, angle stop valve with filter integrated.

Low battery indicator for replacement.

Security stop after 5 minutes of uninterrupted use (adjustable).

Periodic hygiene rinse.

Optional timed gooseneck faucet for filling carafes or bottles.

Stamped basin Ø 280 x H40 mm.

Vandal-proof perforated drain and siphon included.

Backsplash H40 mm.

Wall mounting and connections accessible via a lower access panel with security TORX screws.


Water inlet M 1/2". Invisible drainage 1 1/2" Ø40 mm.

Dimensions W345 x D350 x H162 mm (202 mm with backsplash).

CE. Electronic 5-year warranty.



FB-005E  
with second gooseneck push-button

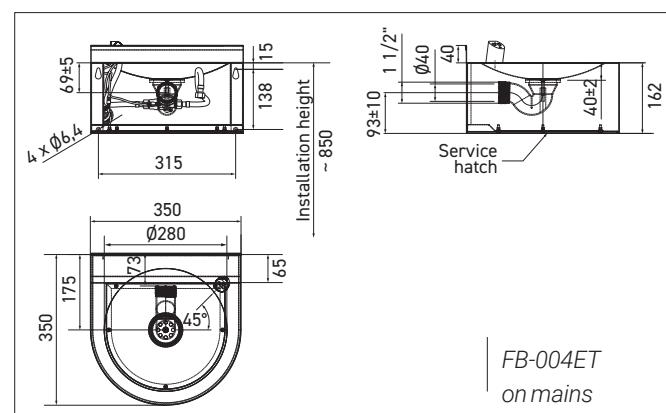

FB-004ET  
on mains

### References model choices

Wall-mounted drinking fountain with automatic activation

- **FB-004ET** on mains
- **FB-004EP** on batteries
- **FB-005ET** on mains with second gooseneck spout
- **FB-005EP** on batteries with second gooseneck spout

### Options

- SLD03 adjustment remote control (detection range, flow duration, on/off, periodic flushing)
- With second automatic touch-free gooseneck spout
- AISI 316 stainless steel quality for seaside installation (minimum quantity on request)
- Version P.R.M. (ref. FB-006E)