



PRIMA TC vandal-proof stainless steel floor-mounted WC


Reference: **IN-021-TC**

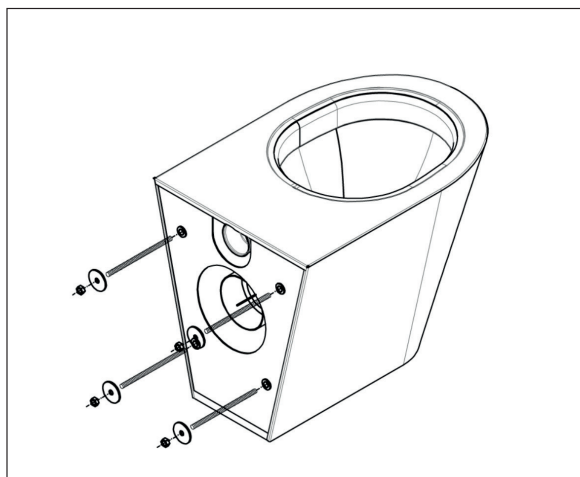


PACK CONTENTS



1 x TOILET PAN
Ref.: **IN-021-TC**




4 x M10 THREADED RODS,
WASHERS AND NUTS



Ø56






0 x CONNECTING SLEEVE
(NOT SUPPLIED)





Ø90 - 112

0 x CONNECTING SLEEVE
(NOT SUPPLIED)


TOOLS



DIMENSIONS

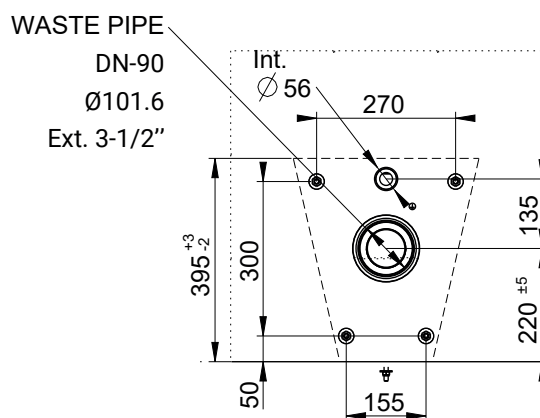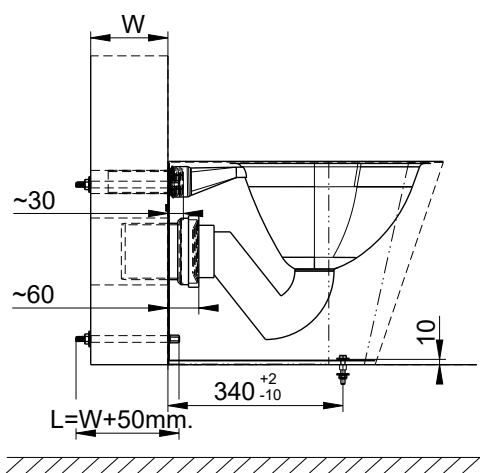

INSTALLATION

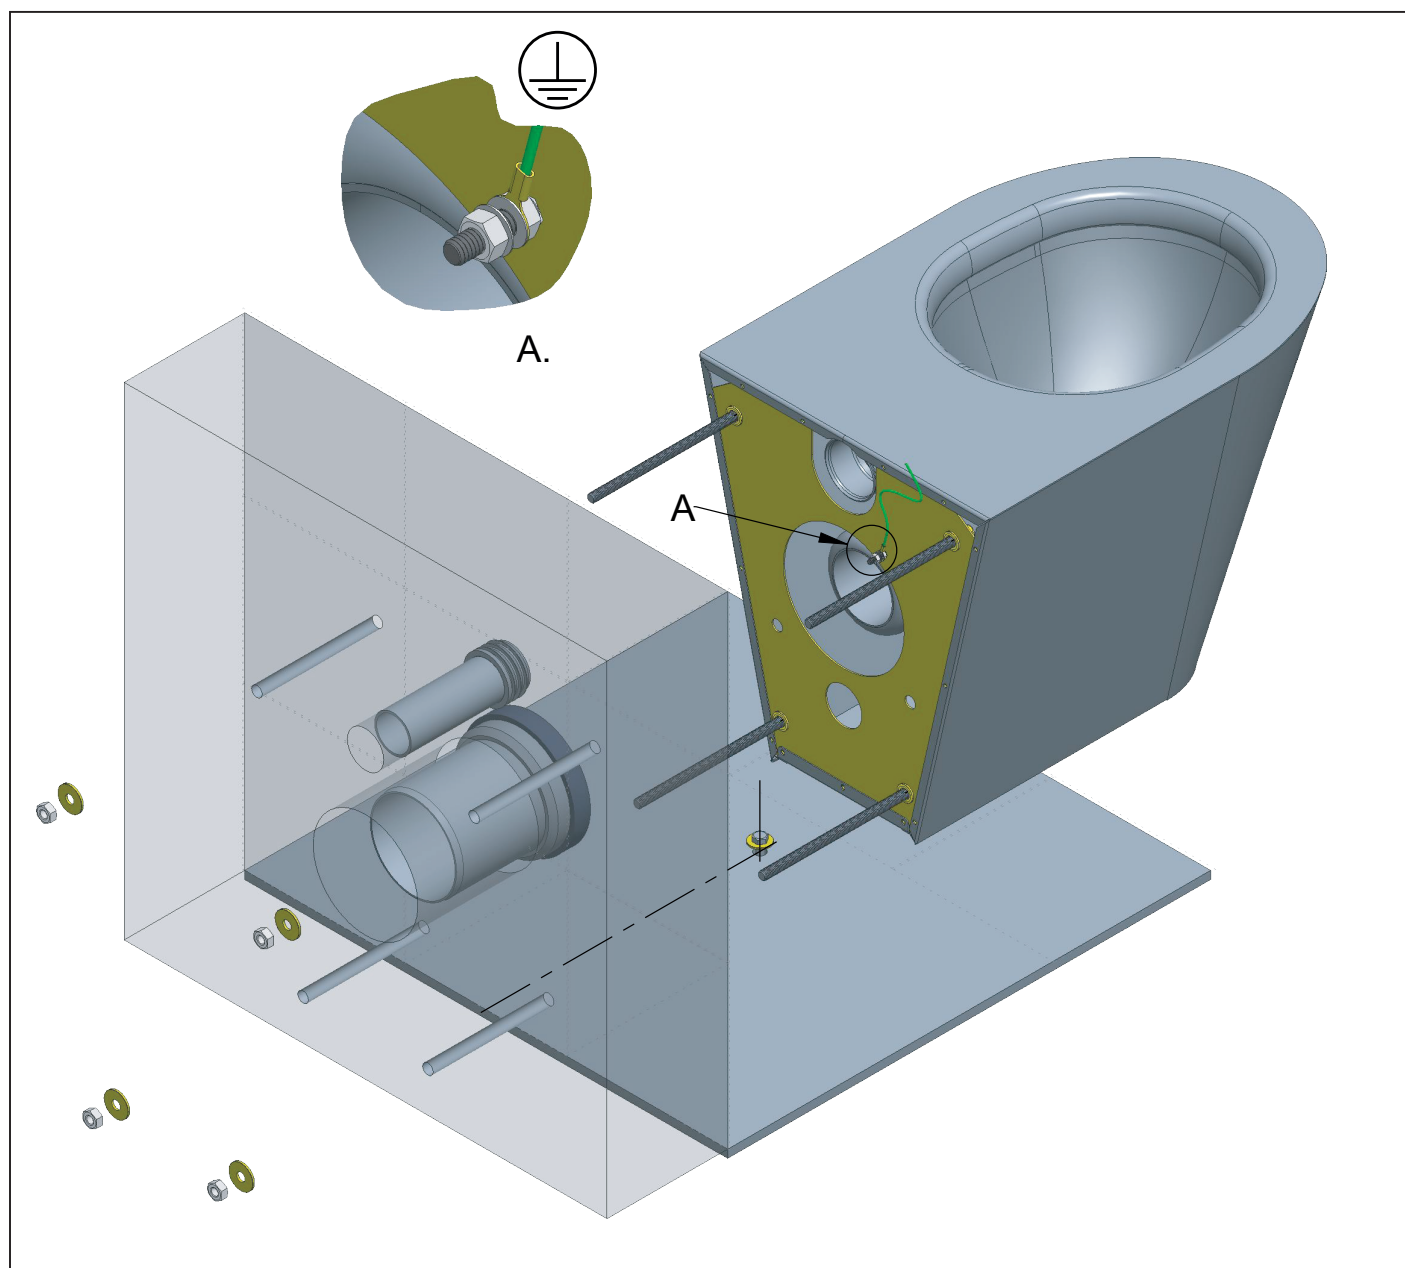

MAINTENANCE

Installation by a qualified professional is advised.

To prevent metal corrosion, stainless steel threaded rods are supplied for this installation.

After installing the toilet and cleaning the premises, remove any protective film from the product.

DO NOT use steel wool or cleaning agents containing alcohol, acid, abrasives or the like .

The use of prohibited cleaning or maintenance products or substances could damage the surface of the toilet.

ONLY use soap and water to clean the surface, then wipe dry with a clean cloth or towel.

When cleaning bathroom tiles, the toilet should be protected from splashes of strong cleaning agents.

You can use a vinegar and water solution (20% vinegar, 80% water) to remove limescale.

Always make sure to wipe off any product residue, as this will cause corrosion and invalidate the warranty.