

## ULTIMA stainless steel close-coupled WC for PRM with cistern

Reference : **IN-201-H**



### Description

Close-coupled stainless steel floor standing toilet with cistern, raised and extended for People with Reduced Mobility, specially designed for high-traffic public washrooms where high levels of safety and hygiene are required.

This low water consumption toilet guarantees a stable, high performance flush with only 4 litres of water.

The satin finish ensures a long lasting surface.

### Features

AISI 304 stainless steel 1,5 / 3 mm thickness, brushed finish.

Visible stainless steel cistern with dual flush button (4L/6L adjustable down to 1,6L/4L min.) and hygienic seal to prevent drops of urine from entering the inside of the pan.

Meets EN-33 and EN-997 standards for a minimum 4L flush.

Splash-proof oval toilet bowl made of one-piece pressed, for easy maintenance and better hygiene.

Concealed perimetral flushing rim for easy cleaning.

Rounded edges and corners for improved safety.

Robust, vandal-proof construction to withstand a load of up to 405 kg on the bowl.

Foam: interior filled with expanding PU-foam for sound-proofing and reinforced strength.

3 possibilities of connecting the 3/8" water inlet: concealed as standard (at the bottom through the back of the pan), optionally to the left or the right of the cistern.

ø100 mm stainless steel trap, for S-trap or P-trap installation.


Wall/floor mounting: quick and easy front installation by side access hatch with TORX safety screws.

Supplied with 2 toilet lid holes covered by 2 security TORX screws, enabling the installation of the seat at a later time without uninstalling the WC pan.

Integrated earthing.

Dim.: W360 x D700 x H825 mm (pan H480 mm).

CE. 10 year warranty.

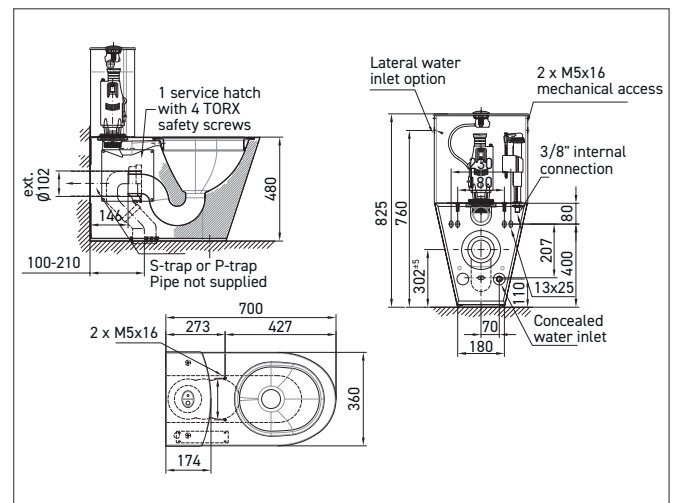

### Reference

ULTIMA PRM Stainless Steel Close Coupled WC

- **IN-201-H**

### Options

- Toilet seat with lid
- Water inlet from top of the cistern, from the left or the right.

