

COMBINEO wall-mounted stainless steel freestanding WC and washbasin combination unit

Reference: **IN-3025**



Description

COMBINEO stainless steel WC and washbasin combination unit for wall-mounted installation with technical duct mounting.

Includes floor-mounted WC bowl (positioned either to the right or left), pressed basin Ø 320 mm, recessed push-button timed faucets for washdown WC, and anti-blocking cold or pre-mixed water for the sink, with anti-ligature stainless steel spout.

Specifically designed for detention facilities that require a high level of security and maximum utility in minimal space

Features

AISI 304 stainless steel, 2.0/1.6/1.2 mm thick, brushed finish.

The combination unit is reinforced with high-density polyurethane foam to prevent noise and denting.

WC with a minimum flush of 4 L, welded to the combination unit.

One-piece anti-splash pressed bowl with a concealed rim for easy maintenance, preventing product concealment, and ensuring better hygiene.

D85 x H150 mm backsplash, designed for shelf use.

2 integrated push-button faucets for washbasin and washdown WC. Vandal-proof, anti-rotation and rounded AISI 304 stainless spout, with concealed flow regulator.

Installation:

Washbasin: M1/2" threaded faucet.

10-20 second timer with anti-blocking cartridge

6 LPM flow rate. Pressure 1.5 - 5 bars (recommended 3 - 4 bars).

Tamper-proof perforated 1 1/2" drain.

WC: M3/4" threaded faucet, pre-connected flush pipe to bowl with Ø55 mm inlet, featuring an integrated Venturi system for effective flushing.

7-10 second timer / 4-8L flush.

Ø100 mm S-trap.

Rounded junction edge for easy installation.


Mounting: Panel-mounted with 6 supplied M10 threaded rods.

Integrated grounding.

Dimensions: W679 x D759 x H1005 mm.

CE. Compliant with EN 997 and EN 33 (WC) + EN 14688 (sink) + EN 816 and EN 1112 (water regulations).

10 year warranty.

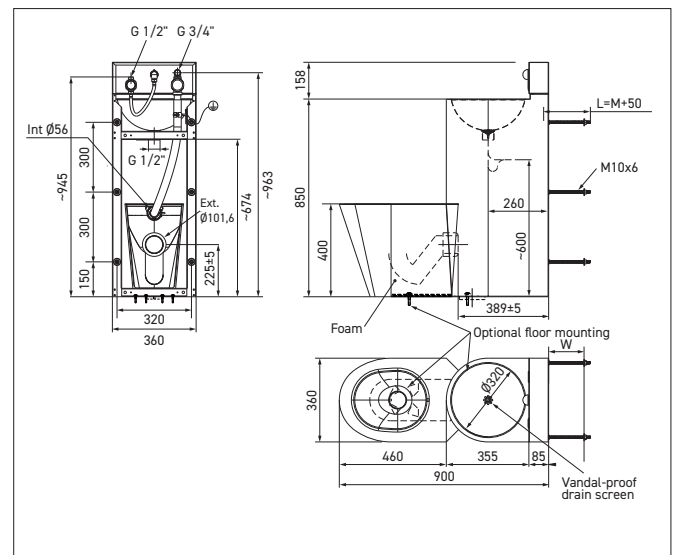

Reference

Free-standing and wall-mounted WC and sink combination unit

- **IN-3025** centered floor-standing WC version

Options

- Ref. : ...-CF Second sink push-button faucet for hot water
- Ref. : ...-R Flushing for 6L tank
- Without backsplash, without water spout, piezo-sensitive controls, remote operation controls...