


## Self standing wash basin on foot in stainless steel INTER-1P

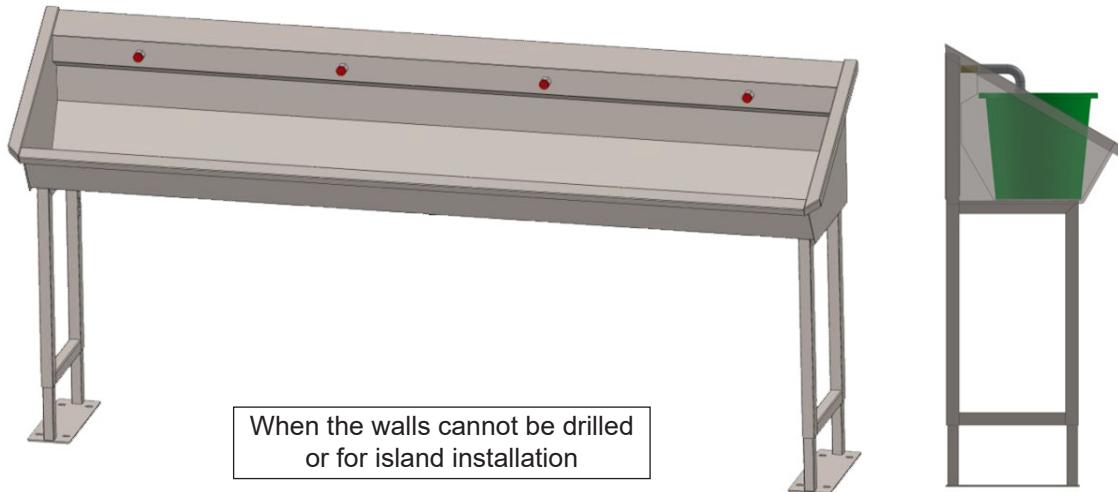

Stainless steel AISI 304 brushed finish, basin thickness 1 mm and sides 1,5 mm.

Interior corners within the wash through length > 90° for an easy clean and to better hygiene.

Flat bottom allowing a 15L. bucket to be placed.

Innovative concept guaranteeing a perfect hygiene since the wash trough is completely welded on the inside: no splits nor joints.

Round edges and no ledge for dust. All the les surfaces are inclined (except the bottom of the wash through) to avoid stagnant water inside or outside the wash through.

Integrated plumbing (multilayer pipes) in the back splash to allow fitting of the taps.

The piping has been designed to prevent stagnant water in the pipe extremity, depending on anti-legionella standard.

A M½" cap is pre-mounted to close one side of the incorporated pipe (left side standard).

Threaded water inlet F1/2" (removing the cap allows a serial supply).

Perforated drainage (free flow), 6/4" waste supplied.

The stainless steel 304 feet, allows to adjust the sink height from 765 mm to 1155 mm.

Floor mounted by 2 stainless steel mounting plates with 4 fixation holes.

Wash through European standard compliant EN 14296 on the resistance to sanitary appliances loads.

Dim.: W1200 to 3000 mm x D490 mm x H430 mm (basin H151 mm).

+ adjustable feet H605 to 995 mm.

### References:

INTER-1P-60	1 place - 600 mm	INTER-1P-200	4 places - 2000 mm
INTER-1P-100	2 places - 1000 mm	INTER-1P-210	4 places - 2100 mm
INTER-1P-120	2 places - 1200 mm	INTER-1P-240	4 places - 2400 mm
INTER-1P-140	2 places - 1400 mm	INTER-1P-280	5 places - 2800 mm
INTER-1P-150	3 places - 1500 mm	INTER-1P-300	5 places - 3000 mm