

## Stainless steel wall-mounted communal washbasin

Reference: **INTER-5**



### Description

INTER-5 stainless steel wall-hung communal washbasin with faucet deck and rear lift for 1 to 5 users, combining hygiene, safety and total functionality.

Available for custom order and can be installed seamlessly in serial installation.

Flat bottom allows bucket to be placed in washbasin.

No horizontal surfaces at the front or rear, in compliance with HACCP requirements

Vandal-proof.

### Features

Communal trough sink made of AISI 304 stainless steel, satin finish. Sides thickness 1,5 mm / basin 1 mm.

Welded inside, no grooves to collect dirt or rust.

Inner washbasin angles > 90° to ease cleaning and servicing, no build-up in the corners.

80 mm deck for faucets with H40 mm backsplash.

142 mm basin depth.




1 1/2" central perforated waste outlet.

Quick and easy mounting through 4 fixing points.

Dim.: D474 x H197 x W600 to 3000 mm.

CE. In compliance with EN1429 and EN14296 norms on the load-bearing capacity of sanitary appliances.

10 year warranty.

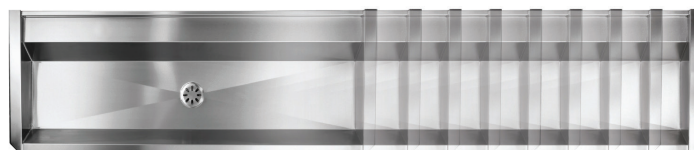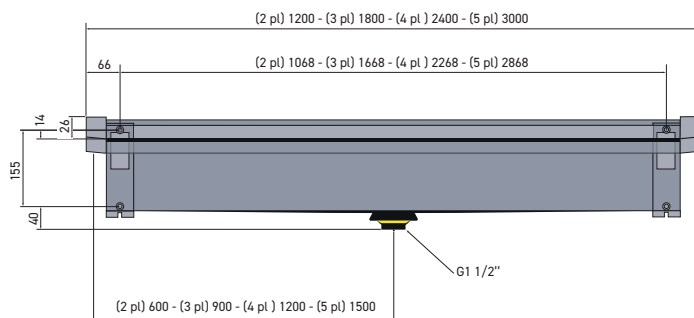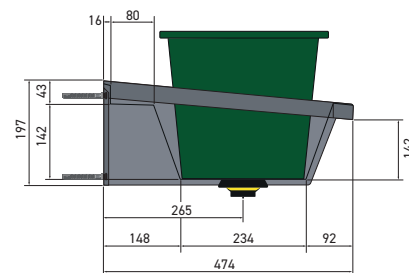

Custom-made to the centimeter up to 3 meters

### References model choices

INTER-5 stainless steel communal trough

- **INTER-5-60 = 1 user / 600 mm**
- **INTER-5-100 = 2 users / 1000 mm**
- **INTER-5-120 = 2 users / 1200 mm**
- **INTER-5-140 = 2 users / 1400 mm**
- **INTER-5-150 = 3 users / 1500 mm**
- **INTER-5-180 = 3 users / 1800 mm**
- **INTER-5-240 = 4 users / 2400 mm**
- **INTER-5-300 = 5 users / 3000 mm**

### Options

- Faucet hole(s) Ø 22 mm (Ref. : ...-T2) or 35 mm (Ref. : ...-T1)
- H292 mm backsplash ref. ...-D
- Stainless steel legs Ø25 x H850 mm ref. INTER-P2
- Adjustable stainless steel drain grid ref. INTER-A15
- Stainless steel trap cover ref. INTER-CS
- Adjustable mounting bracket for perfect horizontal or vertical alignment in series installation ref. INTER-A61
- Soft rubber corner protectors for children ref. INT-HB
- AISI 316 stainless steel
- Plug & Play = pre-assembled pipes and faucets
- Custom made to the centimeter (max 3 m)

