


Thermostatic pre-mixer Compact 3/8"



Multi-positions

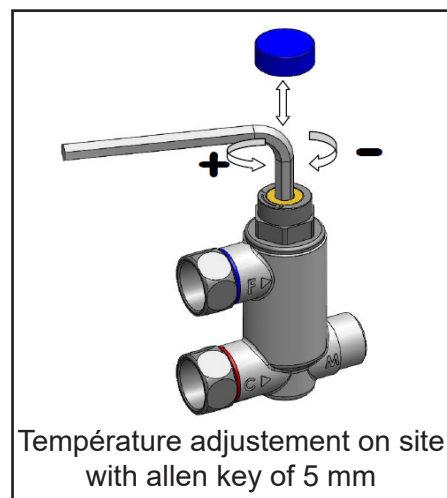


Thermostatic regulator ensures the distribution of mixed water at a constant temperature, depending on the chosen temperature (regardless of the pressure variations, the flow or the operation installation temperature) upstream of any tap requiring a mixed water supply (sink, shower, in communities or domestic use).

Strong points:

- Solid brass CW617N.
- Robust and compact.
- Factory settings 38°C.
- Wax element.
- Brass draw coating PTFE.
- Flaps DN10.

Technical characteristics:

- Weight 240 grams.
 - Center distance supply: 34mm.
 - Flow rate 10 LPM at 3 bars.
 - Settings from 30 to 50°C.
 - Network pressure up to 16 bars.
 - Permissible temperature 80°C.
 - Sanitary applications at the point of draw.
- Anti-scalding safety device in the event of cold water failure.

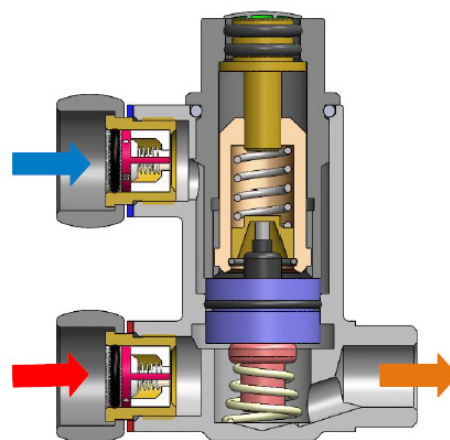

Reference:

RED-G1 = Inlet F 3/8" / Outlet M 3/8"

