

Electronic detection kit for showers

References: **RES-117P / RES-116T**

Description


Touch-free detection kit for cold or pre-mixed water, designed to be integrated into your sanitary installations to maximize hygiene and reduce water consumption.

Includes infrared sensor, solenoid valve, and power supply via transformer or battery box.

PROXI version: water flows in the presence of the user and stops when they move away.

TEMPO version: water is triggered by placing a hand close to the sensor.

Vandal-proof.

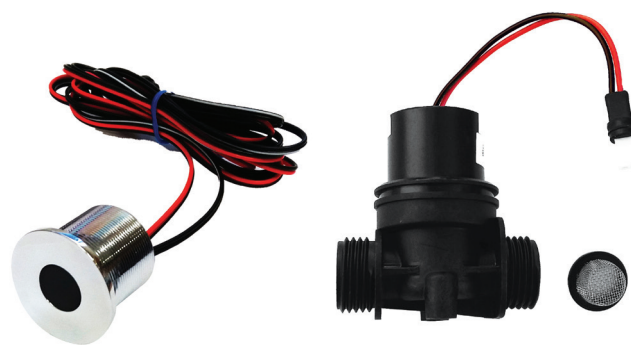

Sensor

Solenoid valve



Transformer or IP67 battery box

Features

Infrared detection.

PROXI detection at 500 mm (adjustable from 100 to 700 mm).

TEMPO: activation/deactivation by hand proximity (short detection) or automatic shut-off after 2 minutes.

Settings adjustable via remote control (detection range, flow duration, periodic rinsing, temporary shut-off...).

Powered by 9V battery or 230/9V transformer.

Low battery indicator for replacement.

Safety shut-off after 10 minutes of continuous flow.

Periodic hygienic rinsing.


Chrome-plated brass body $\varnothing 35$ mm.

Mounting on panel from 2 to 20 mm thick, or flush-mounted version with front-removable sensor.

M1/2" solenoid valve. Cold or pre-mixed water supply.

Water pressure: 0.3 – 8.0 bar. Maximum temperature: 70°C.

CE. ACS. 3 year warranty.

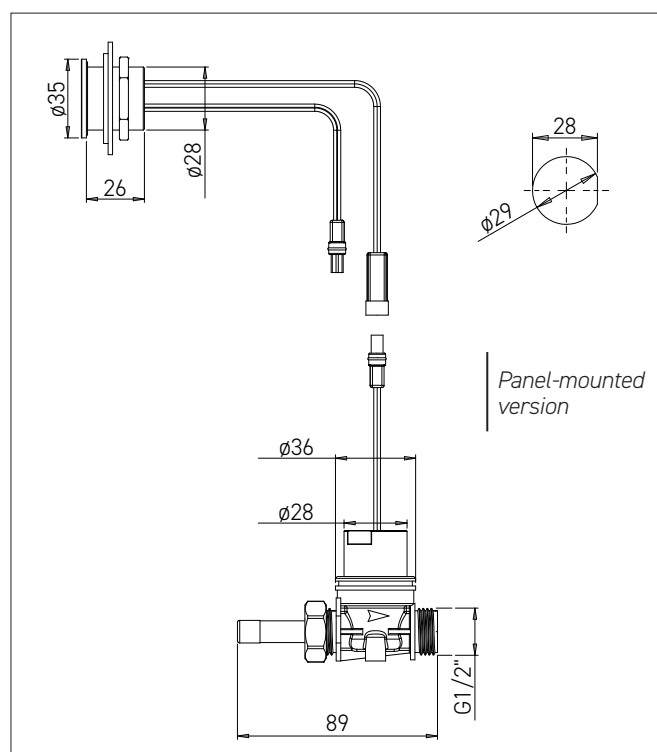

References model choices

Shower detection kit

- **RES-117P** PROXI, 9V battery
- **RES-117P-T** PROXI, 230V transformer
- **RES-116T** TEMPO, 9V battery
- **RES-116T-T** TEMPO, 230V transformer

Options

- RES-31 Remote control
- Flush-mounted version with front-removable sensor.
- RES-EXT 250 mm threaded brass extension for sensor mounting through thick partition wall
- RES-294 IP68 transformer for up to 4 kits
- RES-295 Transformer box to supply up to 10 kits
- Finishes Matte black, matte gold PVD, AISI316 brushed stainless steel (contact us)

