

ALLURE automatic soap dispenser

References: **RES-168** / **RES-168P**

Description

Deck mounted liquid soap dispenser with concealed sensor, integrated in the tip of the spout: delivers a dose of soap by simple approach of the hand, touch-free, avoids all germ transmission.

Minimalist, modern and elegant design.

Heavy-duty brass body allows installation in high-traffic environments..

Drastically reduces soap consumption with precise and consistent dosing, and automatic shut-off with no dripping.

Peristaltic pump: the soap passes through a tube without coming into contact with the pump, preventing contamination and backflow.

Easy to install and fill.

Perfect combination with ALLURE DS electronic faucets for hygiene, pleasure of use and the brand image of sanitary areas.



Features

Activated by infrared sensor.

Powered by 230/12V transformer or 6 LR20 batteries (not included).

Chrome-plated brass body.

1L filling tank and wall bracket (2L or 6L optional).

Operates with peristaltic pump for use with all types of liquid soap, detergent, lotion or antibacterial gel.

Viscosity 100-3800 cPs. PH 6.5 - 8.5.

Deck-mounted installation, standard with an under-sink tank.


Wall-mounted pump support and tank.

Optional RES-38 remote control to adjust the soap dose, priming after filling, temporary stop and reset.

CE. 2 year warranty.



ALLURE soap & water

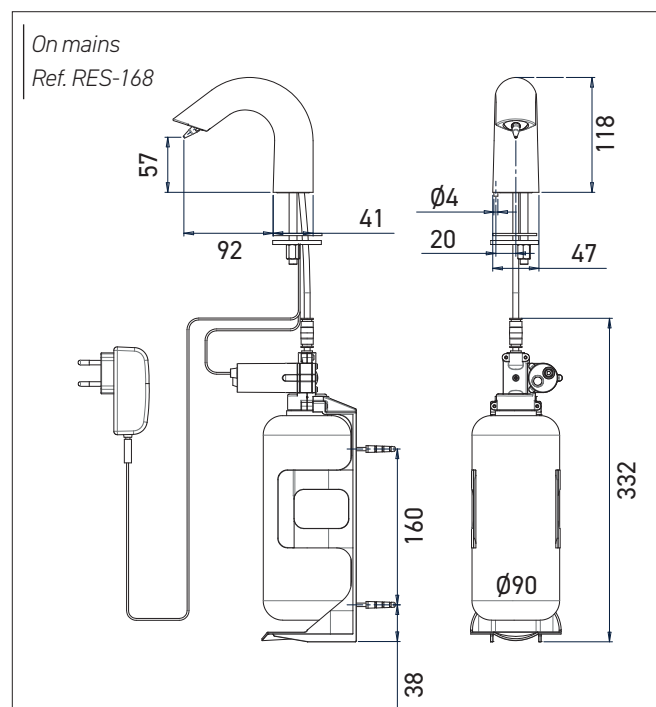

Options

- RES-38 Remote control
- RES-790 6L soap dispenser to supply up to 6 dispensers
- RES-791-2 2L soap tank
- RES-797 Commercial 5L tank connection kit to supply up to 3 dispensers
- RES-294 IP68 transformer to supply up to 4 dispensers
- RES-296 Junction box to supply up to 10 dispensers
- Matching automatic faucet

References model choices

ALLURE automatic soap dispenser

- **RES-168** on mains
- **RES-168P** battery powered

