

SMART stainless steel electronic faucet

References: **RES-15-S1** / **RES-17-S1**

Description

Electronic washbasin faucet in brushed AISI 316 stainless steel, for cold or pre-mixed water.

Recommended for heavy use and installations where ease of maintenance and durability are prioritized (resistant to scratches, UV, and fingerprints...).

Engineered for effortless installation and maintenance, with every component seamlessly integrated into the faucet's structure.

Electronic faucets reduce water consumption, save energy, and optimize sanitary hygiene.



Features

Infrared sensor with optimized presets, adjustable with remote control (detection range, flow duration, periodic flushing, temporary stop...).

Powered by 9V battery or 230/9V transformer.

Sensor includes a low battery LED indicator.

Security stop after 90 seconds without interruption.

Periodic hygiene rinse.

Body made of brushed AISI 316 stainless steel (high corrosion resistance and bacteriostatic properties). Robust mounting Ø28 mm.

Adjustable NEOPERL aerator to optimise jet direction, with limited flow rate of 6 LPM (1.9 LPM or 3 LPM upon demand).


Anti-limescale protection.

External M1/2" solenoid valve, with filter.

Cold or pre-mixed water supply.

Operating pressure: 0.3 – 8.0 bars. / Max. temperature 70°C.

CE. ACS. 3 year warranty.

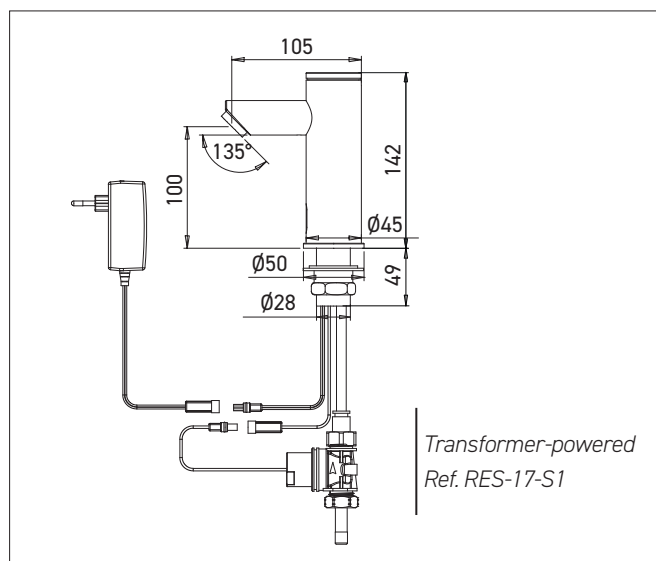

References model choices

SMART stainless steel electronic faucet

- **RES-14** with mixer, 9V battery
- **RES-15** without mixer, 9V battery
- **RES-16** with mixer, 230/9V transformer
- **RES-17** without mixer, 230/9V transformer

Options

- RES-31 remote control
- Limited flow rate 1.3, 1.9 LPM or 3 LPM
- L version spout 90 mm
- RES-294 IP 68 transformer to supply up to 4 faucets
- RES-295 Junction box to supply up to 10 faucets
- RES-32-S1 Matching SMART stainless steel soap dispenser
- SM-25-S1 Matching SMART stainless steel deck-mounted hand dryer

