

ALLURE DS deck mounted electronic faucet

References: **RES-170** / **RES-171**

Description

Electronic faucet with a concealed infrared sensor in the spout tip, offering a sleek and refined design.

Also ensures faster and more efficient detection.

Vandal-proof for installation in high-risk areas.

Engineered for effortless installation and maintenance.

Electronic faucets reduce water consumption, save energy, and optimize sanitary hygiene.

Features

The unit has a self-adjusting infrared sensor which can also be adjusted by remote control (sensor range, flow time, hygiene rinse, temporary off, security time, reset...).

Powered by 9V battery or 230/9V transformer.

Sensor includes a low battery LED indicator.

Security stop after 90 seconds without interruption.

Periodic hygiene rinse.

Solid and robust body made from a single piece of chrome-plated brass.

Adjustable NEOPERL aerator to optimise jet direction, with limited flow rate of 6 LPM (1.9 or 3 LPM on demand).



Limescale protection.

M1/2" external solenoid valve. Filters supplied.

Pre-mixed or cold water supply.

Operating pressure: 0.3 – 8.0 bars. / Max. temperature 70°C.

CE. ACS. 3 year warranty.

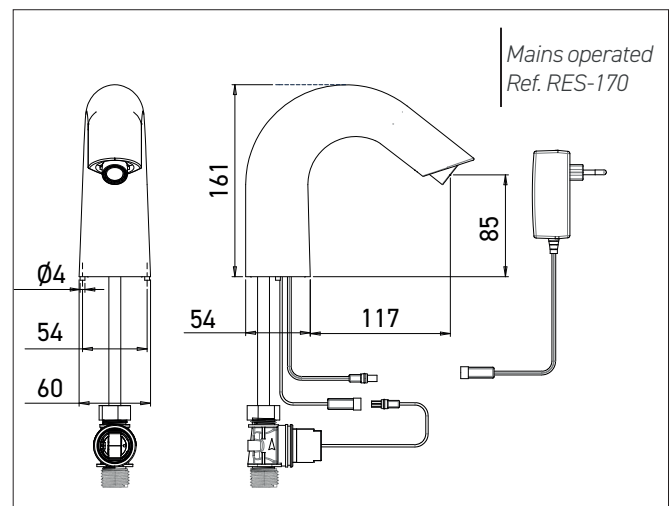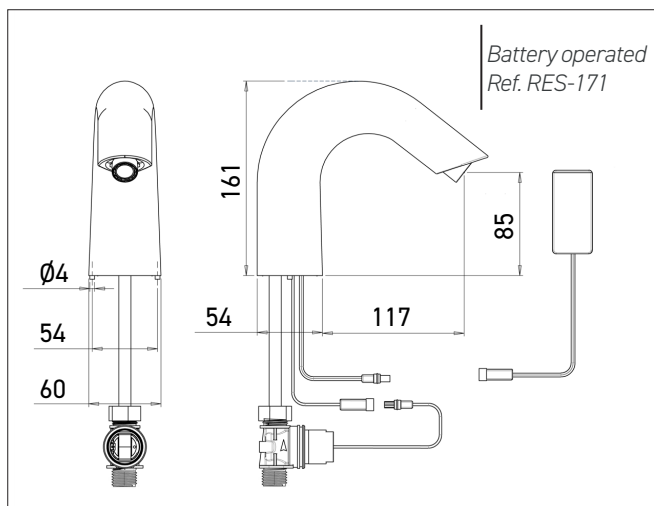

References model choices

ALLURE DS deck mounted electronic faucet

- **RES-171** battery operated
- **RES-170** mains operated

Options

- RES-31 Remote control
- RES-294 IP68 transformer to supply up to 4 faucets
- RES-295 Junction box to supply up to 10 faucets
- Limited flow rate 1.9 or 3 LPM
- Matching soap dispenser