

**AKWATHERMO electronic faucet**References: **RES-220** / **RES-221****Description**

Thermostatic electronic basin faucet with infrared sensor, designed to deliver the desired optimal temperature without touching the faucet, ensuring anti-scald safety.

Engineered for effortless installation and maintenance, with every component seamlessly integrated into the faucet's structure.

Under basin battery access.

Electronic faucets reduce water consumption, save energy, and optimize sanitary hygiene.

**Features**

Infrared sensor with optimised presets, adjustable with remote control (detection range, flow duration, periodic flushing, temporary stop...).

Integrated thermostatic mixer, temperature limited to 48.9°C from the factory. Limiter = allows adjustment of the maximum temperature from 38°C to 48.9°C. Fixed temperature = option to lock the mixer button at the desired temperature.

Powered by 9V battery or 230/9V transformer.

Sensor includes a low battery LED indicator.

Security stop after 90 seconds without interruption.

Periodic hygiene rinse.

Chrome brass spout.

Adjustable NEOPERL aerator to optimise jet direction, with limited flow rate of 6 LPM (3 LPM, 1.9 LPM or 1.3 LPM on demand).

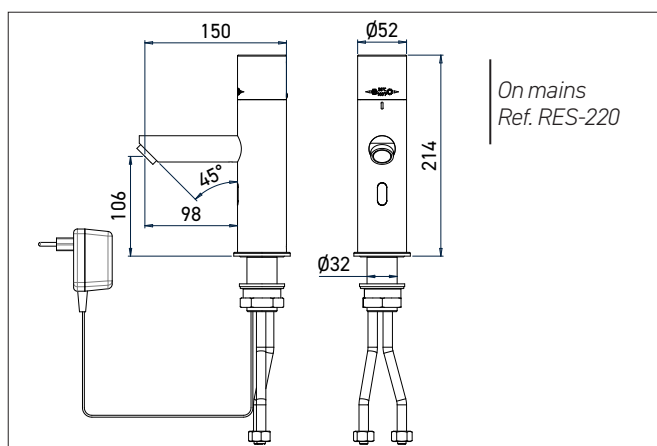
Mixes hot and cold water, with the solenoid valve integrated into the faucet body.

SPEX F3/8" hoses (resistant to chlorinated disinfection and temperature increases) with integrated check valves.

Filters supplied.

Operating pressure: 0.3 – 8.0 bars. / Max. temperature 70°C.

CE. ACS. 3 year warranty.

**References** model choices

AKWATHERMO electronic faucet

- **RES-220** mains operated
- **RES-221** battery operated



*Brushed nickel PVD finish*

**Options**

- RES-31 Remote control
- RES-294 IP68 transformer to supply up to 4 faucets
- RES-295 Junction box to supply up to 10 faucets
- Finishes: Matte black, brushed nickel PVD, matte gold antique bronze PVD, copper PVD (contact us)
- Limited flow rate 1.3, 1.9 or 3 LPM
- Matching automatic soap dispenser faucet

