

**CARREO wall-mounted electronic faucet**

References: **RES-40L / RES-41L / RES-42L / RES-43L**

**Description**

Wall-mounted electronic faucet with infrared sensor for cold or pre-mixed water.  
 Square design and robust engineering for intensive use.  
 Easy installation and upkeep.  
 Electronic faucets preserve water, save energy, and optimize sanitary hygiene.



**Features**



The unit has a self-adjusting infrared sensor which can also be adjusted by remote control (sensor range, flow time, hygiene rinse, temporary off, safety time, reset...).

Powered by 9V battery or 230/9V transformer.  
 Sensor includes a low battery LED indicator.  
 Security stop after 90 seconds without interruption.  
 Periodic hygiene rinse.

Chrome-plated solid brass spout 38 x 38 x L220 mm.  
 Adjustable NEOPERL aerator to optimise jet direction, with limited 6 LPM flow rate (3 LPM, 1.9 LPM or 1.3 LPM on demand).  
 Limescale protection.

Panel-mounted through-wall installation from 1 to 35 mm (up to 200 mm as an option) with M1/2" external solenoid valve and filter, or recessed installation with box including solenoid valve, shut-off valve and stainless steel front panel, recommended under washbasin.

Cold or pre-mixed water supply.  
 Water pressure: 0.3 – 8.0 bars / Maximum temperature: 70°C.  
 CE. ACS. 3 year warranty.

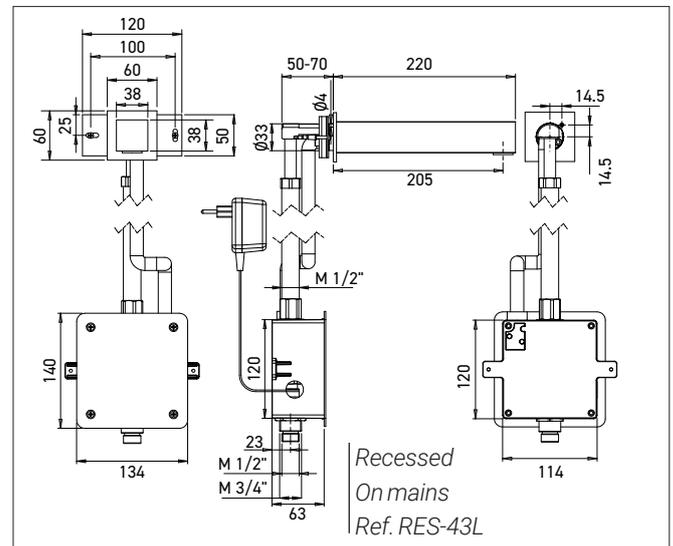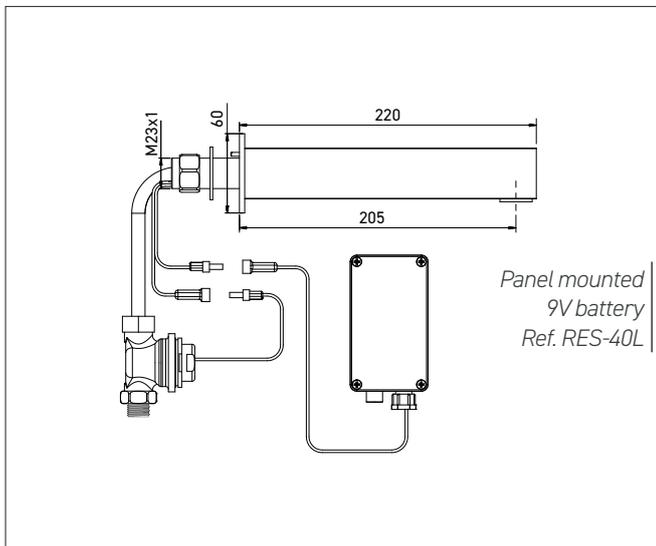

**References** model choices

CARREO electronic faucet

- **RES-40L** panel mounted, 9V battery
- **RES-41L** panel mounted, 9V transformer
- **RES-42L** recessed, 9V battery
- **RES-43L** recessed, 9V transformer

**Options**

- RES-31 Remote control
- RES-294 IP 68 transformer to supply up to 4 faucets
- RES-295 Junction box to supply up to 10 faucets
- Matching soap dispenser
- Limited flow rate 1.3, 1.9 or 3 LPM
- Finishes Matte black, matte White, PVD brushed nickel, PVD matte gold, PVD copper (Contact us)