

Tall ONE automatic soap dispenserReferences: **RES-56-R / RES-56P-R****Description**

Design raised deck-mounted soap dispenser with infrared sensor concealed at the tip of the spout: dispenses a dose of soap simply by approaching the hand, eliminating the risk of cross-contamination.

Drastic reduction in soap consumption: precise, even soap dosage, automatic stop without dripping.

Peristaltic pump: no direct contact between the pump mechanism and the soap, preventing clogging, backflow, and contamination.

Easy to install and fill.

A cost-effective solution for impeccable washroom quality and hygiene.

Features

Activated by infrared sensor.

Powered by 230/12V transformer or 6 x LR20 batteries (not included).

Ø25 mm brass spout.

1L refillable tank and wall support (2L or 6L tank option). Operates by peristaltic pump, allowing the use of any type of liquid soap, detergent, lotion or antibacterial gel.

Viscosity 100-3800 cPs. PH 6.5 - 8.5.

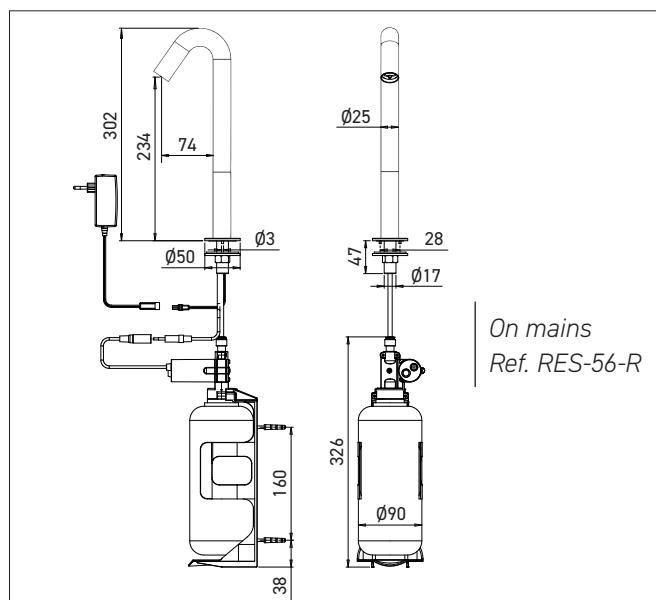
Deck-mounted installation, standard with an under-sink tank. Wall-mounted pump support and tank.

Optional RES-38 remote control for setting adjustments (soap dosage, soap priming after refill, temporary stop, reset).

CE. 2 year warranty.



Raised ONE soap & water

**References** model choices

Tall EXTREME automatic soap dispenser

- **RES-56-R** **12V transformer**
- **RES-56P-R** **LR20 batteries**

Options

- Finishes Matte Black, PVD Brushed Nickel, PVD Matte Gold Antique Bronze, PVD Copper (contact us)
- RES-38 Remote control
- RES-790 6L soap tank to supply up to 6 dispensers
- RES-797 Commercial 5L tank connection kit for up to 3 soap dispensers
- RES-294 IP68 transformer to supply up to 4 dispensers
- RES-296 Junction box to supply up to 10 dispensers
- Matching electronic faucet



+33 (0)2 47 92 23 31



info@autosanit.com



+33 (0)2 47 92 84 71



www.autosanit.com