

VILA automatic urinal

References: S12RZ / S12RS / S12RB



Description

VILA wall-mounted urinal with automatic radar technology, fully concealed behind the ceramic and triggered only by use of the urinal.

Minimalist design, only the urinal is visible.

The hidden flushing system is protected against vandalism, with no contact with water, urine, or cleaning products, ensuring long service life.

This conical-shaped urinal features a 1L automatic syphonic flush, reducing water consumption and environmental impact, while helping prevent unpleasant odors.

ECO modes for significant water savings:

ECO 1: Reduces the number of flushes during periods of heavy use (schools, venues, stadiums...).

ECO 2: The urinal flushes after each use, but not always with the same amount of water.

Settings adjustable based on usage frequency.

Bluetooth control included: Downloadable app for easy configuration of urinal functions via phone, tablet, etc.



Features

White ceramic urinal with built-in trap.

Radar detection concealed within the urinal, triggered only during use (the system does not detect movement around the urinal, only the presence of liquid on the urinal surface).

Settings adjustable with SLD04 remote control (no need to dismantle the urinal) or Bluetooth app (detection sensitivity, flush duration, hygienic flush, pre-flush and post-flush, on/off...).

Powered by 6V battery (4 x 1.5V AA alkaline), integrated 230V mains supply, or external 230V/24V transformer.

Consumption: 6V = 3 W, 24V = 8 W.

Low battery indicator.

1 L water-saving flush (adjustable from 0.5 L to 3 L).

Flush duration adjustable from 0.5 to 15.5 sec.

Minimum usage time before activation, adjustable from 6 to 15 sec.

Automatic flush after 6 hours of non-use.

Overflow protection.

Trap refills with water after each flush.

Water pressure: 1–6 bars. Flow rate: 18 LPM.



Rear M3/4" threaded water inlet and Ø50 mm waste outlet.

Recessed box (140 x 140 x 75 mm) behind the urinal with solenoid valve and stop valve (for flow adjustment).

Concealed mounting.

Dimensions: W310 x H490 x D280 mm.

CE certified. Electronics guaranteed for 5 years.

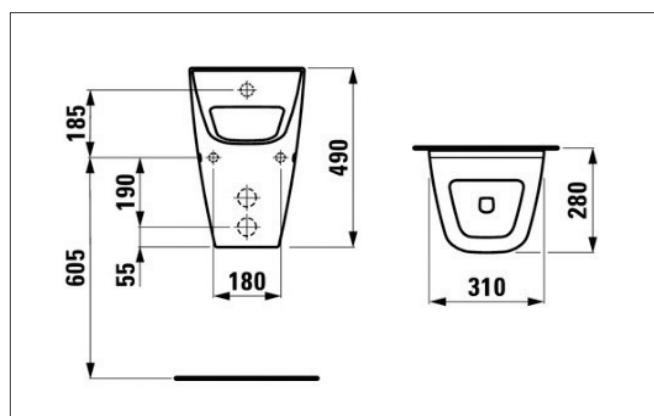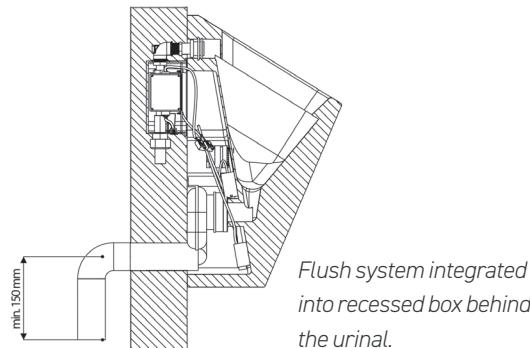

References model choices

VILA ceramic urinal

- **S12RZ** 230V integrated mains supply
- **S12RS** 24V external transformer
- **S12RB** battery powered

Options

- SLD04 Remote control
- SPZ06 230/24V transformer box for 1 urinal
- SPZ02 230/24V transformer box for max 5 urinals
- SPZ01 230/24V transformer box for max 9 urinals
- Urinal with lid
- Bluetooth application on App Store or Play Store



+33 (0)2 47 92 23 31



info@autosanit.com



www.autosanit.com