

URBA wall-mounted automatic urinal with intergrated thermic flushing

Reference: **UR-11-TH**



Description

Stainless steel wall-mounted urinal with invisible electronic thermal release = aesthetically pleasing, easy to install and vandal-proof.

The system activates the flush when it detects a change in temperature (heat from urine).

System located outside the siphon for maximum reliability, not affected by liquids.

Hygiene = touch-free and eliminates unpleasant odors.

Designed for heavy use and vandal resistance.

Features

AISI 304 stainless steel, 1.5/1.0 mm thickness, brushed finish.

Pressed bowl with splash proof shape and tamper proof perforated drain.

Installation and connection via service hatch, bottom sealed with security Torx screws.

Adjustable 0.5 to 15.5 second rinsing time.

Powered by 6V batteries or 230/12V external transformer.

Consumption: 3W on batteries and 7W on mains power.

Adjustable settings through SLD04 remote control (flush time, sensitivity, on/off...).

Automatic hygienic rinse after 24H of non-use.

Water pressure: 1-8 bar. Flow rate: 12LPM at 3 bars.


Water inlet with 1/2" threaded connection.

Horizontal Ø 40 mm drainage.

Dim.: W360 x D325 x H550 mm.

CE. 5 year electronic warranty.

Urinal supplied with rinsing nozzle, thermal sensor, solenoid valve, angle stop valve with filter, trap, battery or transformer, fixing accessories.

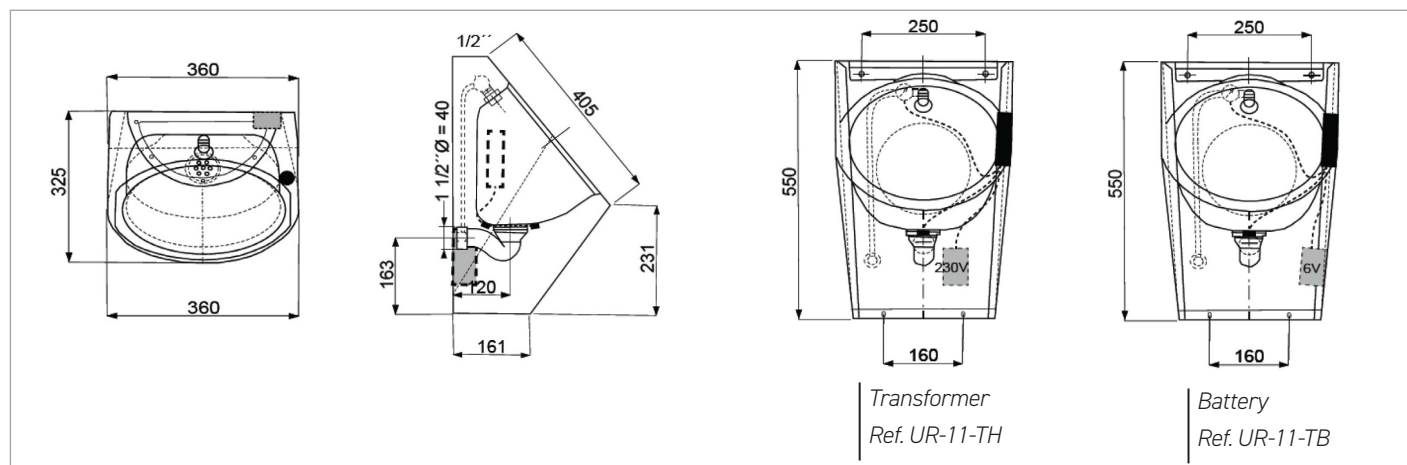

References model choices

URBA stainless steel urinal

- **UR-11-TH 12V transformer**
- **UR-11-TB 6V batteries**

Options

- Vertical exposed water inlet and/or exposed drainage
- SLD04 remote control

