

Automatic wall mounted tap in stainless steel AKWALINE



Electronic wall mounted sink tap in stainless steel with nano infrared detection and Ø 28 mm extra-slim spout design, for cold or pre-mixed water.

Technical characteristics

- Stainless steel spout quality AISI 316, brushed finish, Ø28 x 220mm
Recommended for intensive use and installations where easy maintenance and robustness are privileged (resistant to scratches, UV, finger marks...)
- Self adjusting infrared sensor. Adjustable settings by remote control (sensor range, flow time, hygiene rinse, temporary off, reset...).
- Security stop after 90 seconds without interruption.
- Aerator with limited flow rate 5 LPM (or 1,9 LPM).
- Sensor includes a low battery indicator light.
- Powered by 9V battery or 220/9V transformer.
- Low energy consumption, battery lasts around 3 years.
- Operating pressure: 0.5 – 8.0 bars.
- Water temperature max. 70°C.
- Cold and pre-mixed water supply, solenoid valve M $\frac{1}{2}$ "
With filter.
- Limited warranty 3 years. CE. ACS.

Ordering information


AKWALINE stainless steel electronic tap

- ☐ **RES-140-S1** panel mounted, 9V battery
- ☐ **RES-141-S1** panel mounted, 9V transformer
- ☐ **RES-142-S1** recessed, 9V battery
- ☐ **RES-143-S1** recessed, 9V transformer

Options:

- Remote control RES-31
- Limited flow rate 1.9 LPM
- Hygiene anti-limescale protection rinse
- Long spout L version 275 mm
- IP68 transformer to supply up to 4 taps
ref. RES-294
- Transformer box to supply up to 10 taps
ref. RES-295
- IP68 transformer open wires RES-298
- Matching soap dispenser design
- Integrated on washbasin wall support frame

RES-141-S1 pannel mounted, transformer

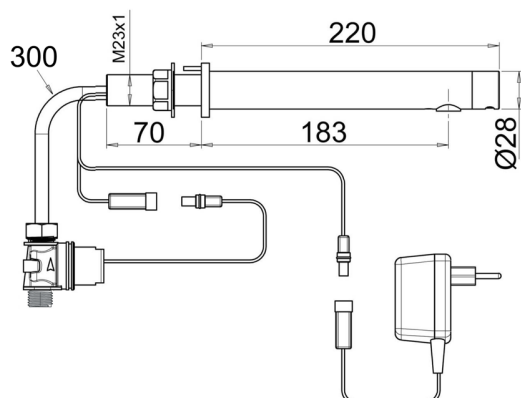

RES-143-S1 recessed transformer

