


Wall mounted coin and token operated shower timer, up to 8 showers

References: **SA-02LM / SA-02LN**

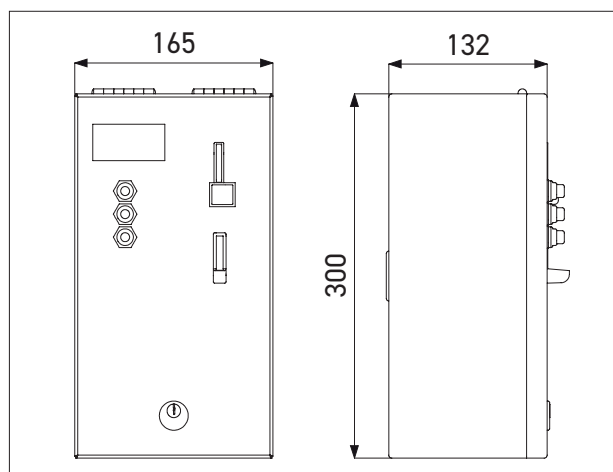

Description

Recessed shower timer for 4 to 8 showers, 1€ or 2€ coins or token.

Opening of the solenoid valve controlled by coin or token.

Choice of shower by the user: before inserting the coin or token, the user selects the shower by pressing the corresponding button, and the shower number will appear on the screen.

Operates on 24V CC, via 230/24V transformer.

AISI 304 stainless steel box (AISI 316L upon request).

Two operating modes:

1. Direct control:

Water runs for 30 seconds starting when the coin is inserted (adjustable: 0 - 255 sec).

2. Interactive control:

The user opens the water flow manually using the Piezo shower control. The flow time is measured during valve opening and has a maximum 4-minute interruption time limit, including the time taken to insert the coin and start the shower. The factory set 4-minute limit is designed to provide a quick shower turnover in the event of non-use during the paid period.

References model choices

Wall mounted shower time, up to 8 showers

- **SA-02LM** For 4 to 8 showers, direct control
- **SA-02LN** For 4 to 8 showers, interactive control

Options

- SLD05 Settings adjustment remote control
- SA-50 Set of 50 pcs. metal tokens
- SPZ02 230/24V transformer box
- SPZ04Y 230/24V transformer on DIN rail

Interactive control shower valves



Individual Piezo shower control for pre-mixed water
Reference: SA-20



Individual Piezo shower control with mixer button
Reference: SA-20M



Individual Piezo shower control with thermostatic mixer button
Reference: SA-20T



Stainless steel Piezo shower panel
References: SA-21/ SA-21M/ SA-21T

