

KUBIKA wall-mounted electronic faucet

References: **RES-80** / **RES-81** / **RES-82** / **RES-83**

Description

Wall-mounted electronic faucet with infrared sensor for cold or pre-mixed water.

Rectangular design and robust engineering for intensive use.

Easy installation and upkeep.

Electronic faucets preserve water, save energy, and optimize sanitary hygiene.

Features

The unit has a self-adjusting infrared sensor which can also be adjusted by remote control (sensor range, flow time, hygiene rinse, temporary off, safety time, reset...).

Powered by 9V battery or 230/9V transformer.

Sensor includes a low battery LED indicator.

Security stop after 90 seconds without interruption.

Periodic hygiene rinse.

Chrome-plated solid brass spout W58 x H38 mm x L170 mm.

Adjustable NEOPERL aerator to optimise jet direction, with limited 5 LPM flow rate (1.9 LPM on demand).



Limescale protection.

Panel mounted through wall installation max. 35 mm, with external M1½" solenoid valve and filter, or recessed installation with M1/2" solenoid valve box and filter (built-in back-up battery for normal operation in the event of a power cut).

Cold or pre-mixed water supply.

Water pressure: 0.3 – 8.0 bars / Maximum temperature: 70°C.

CE. ACS. 3 year warranty.

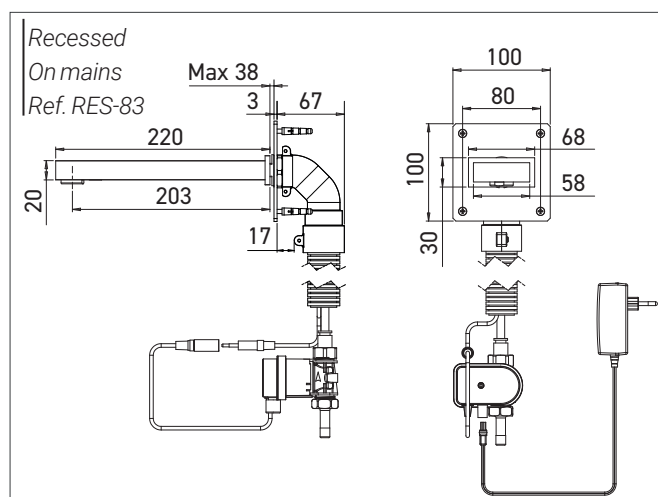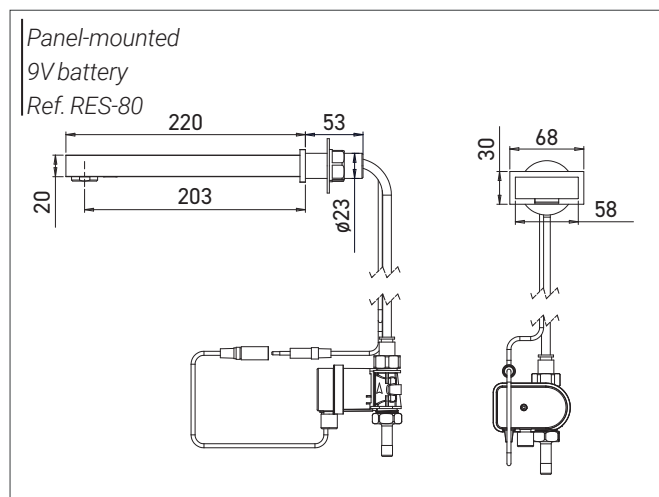

References model choices

KUBIKA electronic faucet

- **RES-80** panel mounted, 9V battery
- **RES-81** panel mounted, 9V transformer
- **RES-82** recessed, 9V battery
- **RES-83** recessed, 9V transformer

Options

- Finishes Matte black, PVD brushed nickel, PVD matte gold, PVD copper (Contact us)
- RES-31 Remote control
- RES-294 IP 68 transformer to supply up to 4 faucets
- RES-295 Junction box to supply up to 10 faucets

