

EXTREME WS wall-mounted automatic faucet

References: [RES-901](#) / [RES-902](#) / [RES-911](#) / [RES-912](#)

Description

Electronic wall-mounted washbasin faucet with infrared sensor for cold or pre-mixed water supply.

Pure design: sensor concealed directly in the tip of the spout.

Comfort: highly responsive detection, water flows as soon as hands approach!

Engineered for easy installation and maintenance.

Features

Self-adjusting infrared sensor or adjustable settings with remote control (detection range, flow duration, periodic flushing, temporary stop...).

Powered by 9V battery or 230/9V transformer.

Sensor includes a low battery LED indicator.

Security stop after 90 seconds without interruption.

Periodic hygiene rinse.

Chrome-plated solid brass spout, L195 mm Ø25 mm.



Adjustable aerator with limited flow rate of 4 LPM (1.9 LPM on demand).

Panel-mounted installation (1 to 55 mm) or flush-mounted installation, with external M1/2" solenoid valve box and filter (built-in back-up battery for normal operation in the event of a power cut).

Cold / pre-mixed water supply. Lead-free water circuit.

Operating pressure: 0.5 – 8.0 bars. / Max. temperature 70°C.

CE. ACS. 3 year warranty

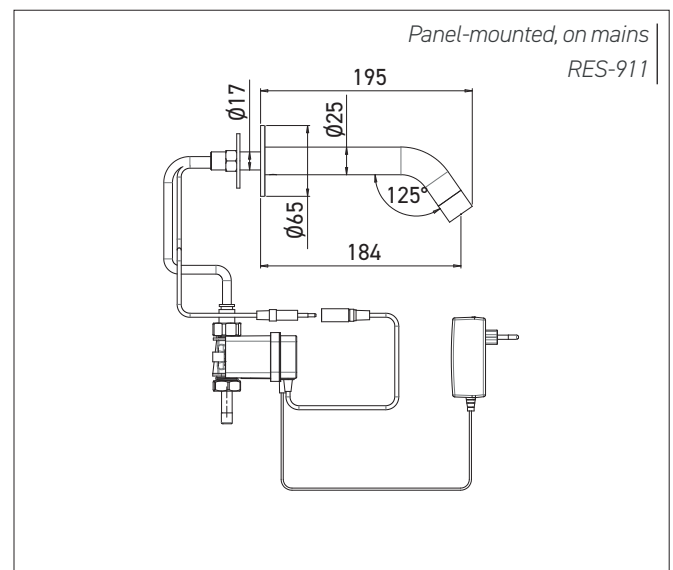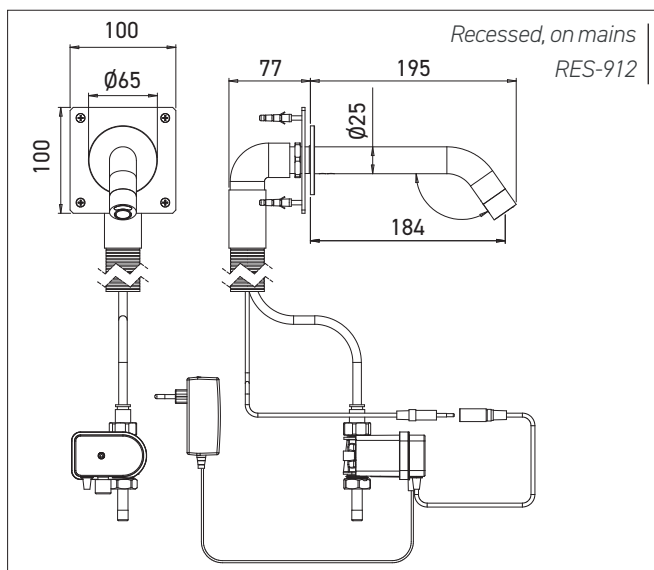

References model choices

EXTREME WS automatic faucet

- [RES-901](#) panel-mounted, 9V battery
- [RES-911](#) panel-mounted, on mains
- [RES-902](#) recessed, 9V battery
- [RES-912](#) recessed, on mains

Options

- RES-31 Remote control
- ...C 150 mm short spout version
- ...L Recessed with 272 mm elongated spout version
- Finishes: Matte Black, PVD brushed Nickel, PVD Matte Gold, Antique Bronze, PVD Copper (contact us)
- AISI 316 brushed stainless steel finish
- Limited flow rate 1.9 LPM
- RES-294 IP68 transformer to supply up to 4 faucets
- RES-295 Transformer box to supply up to 10 faucets
- Matching soap dispenser or hand dryer
- Integrated on washbasin support frame