

VENUS automatic recessed direct flush toilet valve

References: **DWS-20D / DWS-21D**

Description

Recessed stainless steel electronic faucet for automatic WC flushing with dual flush volume.

Presence detection by infrared, and automatic time-delayed closing without manual contact.

VENUS delivers 3 L for liquid waste and 6 L for solid waste. An average of 3.8 L per flush (assuming 3 half-flushes for a full flush) reduces water consumption by more than 37% compared to a standard 6 L flush.

The VENUS detection system determines whether the flush should be full or reduced based on presence time: half-flush for less than one minute and full flush for more than one minute.

Automatic flushing after each use:

- Eliminates odours when the toilet is not flushed
- No cross-contamination through contact
- Suitable for people with reduced mobility
- Enhances the quality of sanitary installations
- Courtesy flush button



Features

Recessed stainless steel electronic urinal flush valve.

Powered by 9V battery or transformer.

Low battery indicator.

Brushed AISI 316 stainless steel vandal-proof front panel.


Stop valve, solenoid valve and filters housed in the control box.

Cold water inlet connection 1».

Automatic flushing if not used for 24 hours.

Dim. H 225 x W 168 mm.

2-year warranty.

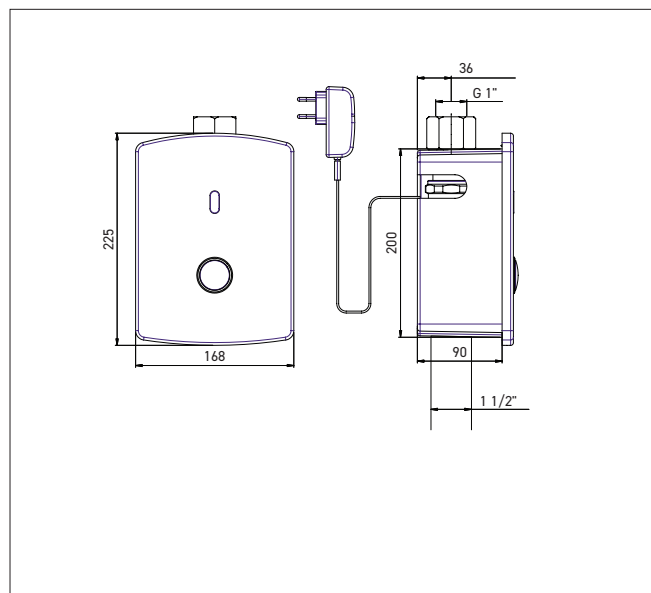

References model choices

VENUS Electronic Flush Valve

- **DWS-20D** **9V lithium battery**
- **DWS-21D** **230/9V transformer**

Options

- RES-31 Settings remote control
- IP 67 transformer housing
- Transformer to power up to 3 or 10 flush valves