

Stainless steel high-speed electric hand dryer

References: **SM-3001** / **SM-3002** / **SM-3003**



Description

High-performance stainless steel automatic hand dryer.

Ultra fast and comfortable hand drying in 6 seconds!

Adjustable sound volume and air flow.

Elegant, easy-to-maintain design.

Blue light beam when in use for hand placement.

Vandal proof.

Features

Activated by self-adjusting infrared sensor.

Operating voltage: 230 V, 50/60Hz, 5 A, 1.45 KW (other voltages according to country requirements on request).

Standby power consumption: 1,5 W.

Air flow speed at 75-100 m/s. Output 125.5 m³/h.

Sound level: 70 to 73.7 dB at 1 m.

Drying time: 6 seconds
(according to UL PCR hand dryer rule).

Cover in AISI 304 stainless steel, 1.5 mm thick.

Illuminated LED triangle on front panel :
red LED in waiting, green in use.

Nominal power output 1450 W
(350-625W motor, 450-825W heater).

Heated or ambient air switch.

Security stop after 60 seconds without interruption.


Triple safety protection:

- Motor with safety thermostat at 95° C.
- Heater with safety thermostat at 85° C.
- Cut-off fuse at 142°C.

Dimensions: **W205xD180xH287 mm.**

Net weight: **5.8 kg.**

3 year warranty. CE. Class 1. IP 21.

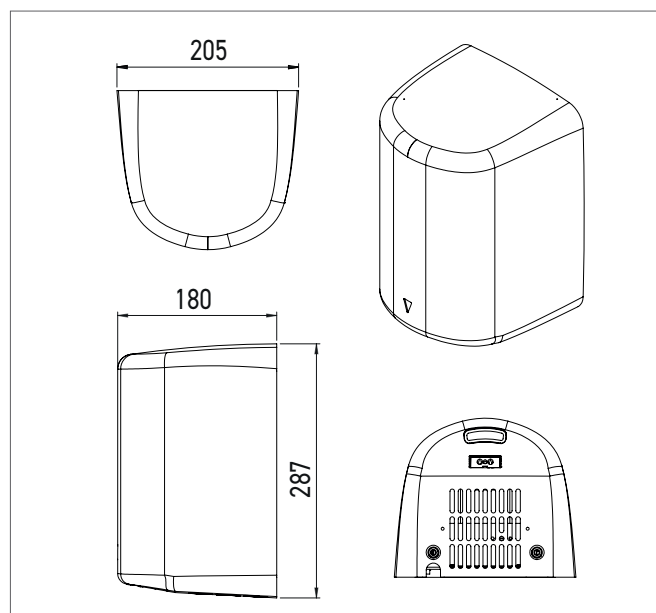

Environmental labels and certifications:



Ref. **SM-3001** brushed stainless steel



Ref. **SM-3002** bright stainless steel



Ref. **SM-3003** white epoxy steel

References model choices

- **SM-3001** brushed stainless steel
- **SM-3002** bright stainless steel
- **SM-3003** white epoxy steel

Options

- Hepa filter and grid ref. SM-3FH
- IP23 protection rating
- PVD finish

