

PUREA electronic kitchen faucet

References: **REW-05** / **REW-06**

Description

PUREA kitchen faucet with water activation either manually via the mixer lever, or through automatic detection for greater comfort and improved hygiene for the user.

Comfortable automatic activation.

Water flows when hands approach the sensor, touch-free.
The faucet stays clean, even with dirty hands.

Flexible manual activation.

With the easy-to-use mixer lever (can be mounted on the right or left) and a $\pm 180^\circ$ swivel spout with pull-out end featuring a straight water jet or spray function.

Temporary shut-off for cleaning.

Practical deactivation function for cleaning the sink.



Features

Touch-free activation by 5 cm short-distance hand approach (adjustable from 1 to 30 cm), with water flow maintained during presence within sensor range (25 or 35 cm).

Temperature adjustment: manual flow via the temperature lever.

Automatic flow via the opposite mixer button.

Mixer lever with adjustable temperature limiter.

Operating parameters adjustable on the electronic module.

Safety shut-off after 1 minute without interruption, adjustable from 10 seconds to 10 minutes.

Optional anti-legionella periodic rinse with adjustable duration and interval.

Powered by 230 V / 50 Hz transformer, max. standby consumption 0.2W, or by 6 x 1.5V AA alkaline batteries.

Battery life up to 200,000 activations (max 3 years).

Chrome-plated brass body.

Spout rotation: $\pm 180^\circ$ (adjustable). Pull-out end.


Flow rate: 9 LPM at 3 bars.

Water inlets: F 3/8".

Mounting hole: $\varnothing$ 35 mm.

Water temperature: max. 70°C / Water pressure: 0.5–5 bars (above this, a pressure reducer must be used).

CE. 2 year warranty.

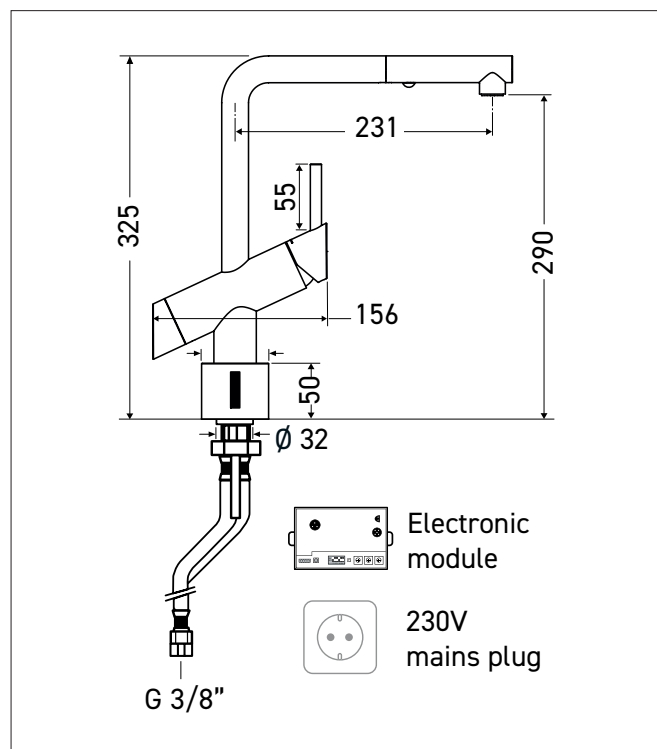

References model choices

PUREA electronic kitchen faucet

- **REW-05** battery powered
- **REW-06** transformer powered

