

Wall-mounted 3-in-1 combination unit paper towel, hand dryer and waste bin

Reference: **BO-380309**



Description

Wall-mounted stainless steel combination unit with paper hand towel dispenser, high-performance dual air flow hand dryer, and integrated bin with a single window, optimizing space and PRM access for all three functions with installation at the required height.

Offers the choice between hand drying by air or paper sheet.

Or combine a hand dryer with a single paper sheet for perfect hand drying. This unique combination contributes to sustainable development by reducing paper and electricity consumption.

2 operating modes available =

Air Priority = the hand dryer and green LED light turn on when hands are detected and turn off when removed.

Paper Priority = 3-second delay before hand dryer activation.

Sleek design, concealed hinge and flush locks.

Features

Manufactured in AISI 304 stainless steel with brushed finish.

Door thickness 1.2 mm with 14 mm edges folded at 90°, welded corners and full-height concealed stainless steel hinge, for maximum rigidity. Opening limiter cable.

Two flush-mounted key locks.

Fully welded construction recessed housing.

Dispenser capacity 450 to 600 hand towels depending on size.

DISTRITOP accessory included: continuous single-sheet dispensing, reducing paper consumption by at least 20%, eliminating jams and multiple sheet pulls at once. A guide with return prevents hand towels from falling when the door is opened.

230V 4 A hand dryer, 900 W power, Class I.

Double air outlet through lateral slots; the orientation prevents blowing into the waste container.


Infrared detection. Green/red LED indicator.

Security stop after 90 seconds of uninterrupted use.

Removable 14 L waterproof rigid plastic bin.

Dim.: W396 x D120 x H1449 mm

CE. 2 year warranty.

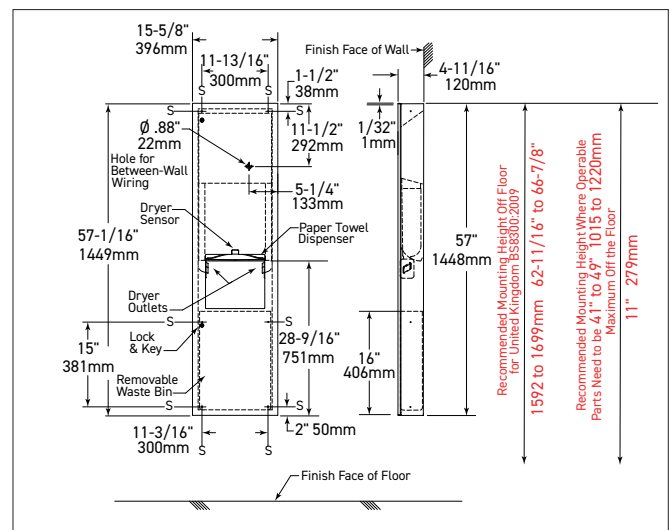

Reference

Wall-mounted stainless steel combination paper towel dispenser, hand dryer and waste bin.

- **BO-380309** brushed stainless steel finish

Options

- BO-38031 Large capacity version (recessed 202 mm)
- BO-380349 Wall-mounted surface version