

AKWA electronic faucet

References: **RES-100 / RES-101 / RES-102 / RES-103 / RES-104 / RES-105**

Description

Electronic washbasin faucet with nano infrared sensor.
Elementary shape for a timeless design.
Robust construction for safe installation in high-risk areas.
Engineered for effortless installation and upkeep.
Electronic faucets reduce water consumption, save energy and optimise sanitary hygiene.

Features

Infrared sensor with optimized presets, adjustable with remote control (detection range, flow duration, periodic flushing, temporary stop...).

Powered by integrated or external 9V battery under the sink, or 230/9V transformer.

Sensor includes a low battery LED indicator.

Security stop after 90 seconds without interruption.

Periodic hygiene rinse.

Chrome-plated brass body $\varnothing 44,5$ mm.

Integrated solenoid valve.

Limited flow rate of 6 LPM (3 LPM, 1.9 LPM or 1.3 LPM on demand).



Lead-free water circuit.

Cold water or pre-mixed water supply, or cold and hot water supply in mixer versions.

SPEX F3/8" hoses (resistant to chlorinated disinfection and temperature increases) with integrated check valves.

Operating pressure: 0.3 – 8.0 bars. / Max. temperature 70°C.

CE. ACS. 3 year warranty.

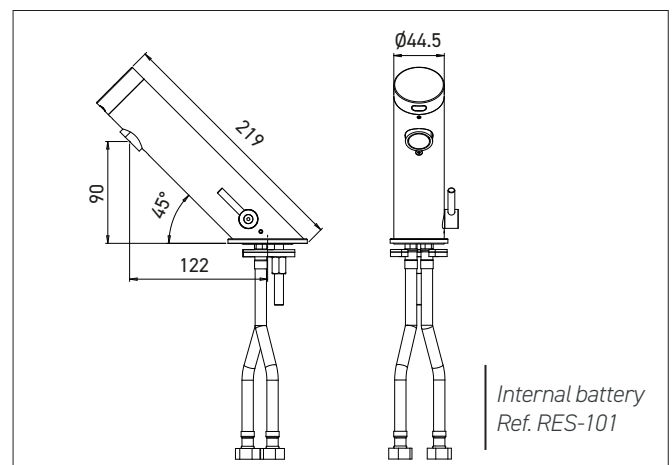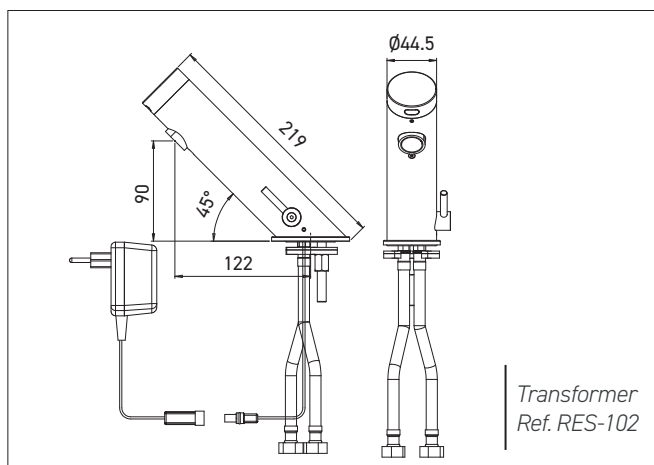

References model choices

AKWA electronic faucet

- **RES-100** mixer version with external battery
- **RES-101** mixer version with internal battery
- **RES-102** mixer version with transformer
- **RES-103** external battery version
- **RES-104** internal battery version
- **RES-105** transformer version

Options

- RES-31 remote control
- Limited 1.3, 1.9 or 3 LPM flow rate
- Finishes: matte black, brushed nickel PVD, matte gold antique bronze PVD, copper PVD (contact us)
- IP 68 transformer to supply up to 4 faucets ref. RES-294
- Junction box to supply up to 10 faucets ref. RES-295
- Extended lever for PRM ref. -MH
- Matching AKWA soap dispenser ref. RES-87