

SMART electronic faucet

References: **RES-14 / RES-15 / RES-16 / RES-17**

Description

Designer electronic faucet with infrared sensor.

The vandal-proof brass construction allows for safe installation in high-risk areas.

Its elegant design adds a contemporary and polished touch to sanitary spaces.

Engineered for effortless installation and maintenance, with every component seamlessly integrated into the faucet's structure.

Under basin battery access.

Electronic faucets reduce water consumption, save energy, and optimize sanitary hygiene.

Features

Infrared sensor with optimized presets, adjustable with remote control (detection range, flow duration, periodic flushing, temporary stop...).

Powered by 9V battery or 230/9V transformer.

Sensor includes a low battery LED indicator.

Security stop after 90 seconds without interruption.

Periodic hygiene rinse.

Chrome-plated brass body.

Adjustable NEOPERL aerator to optimise jet direction, with limited flow rate of 6 LPM (3 LPM, 1.9 LPM or 1.3 LPM on demand).



Mixes hot and cold water, with the solenoid valve integrated into the faucet body.

SPEX F3/8" hoses (resistant to chlorinated disinfection and temperature increases) with integrated check valves.

Filters supplied.

Operating pressure: 0.3 – 8.0 bars. / Max. temperature 70°C.

CE. ACS. 3 year warranty.

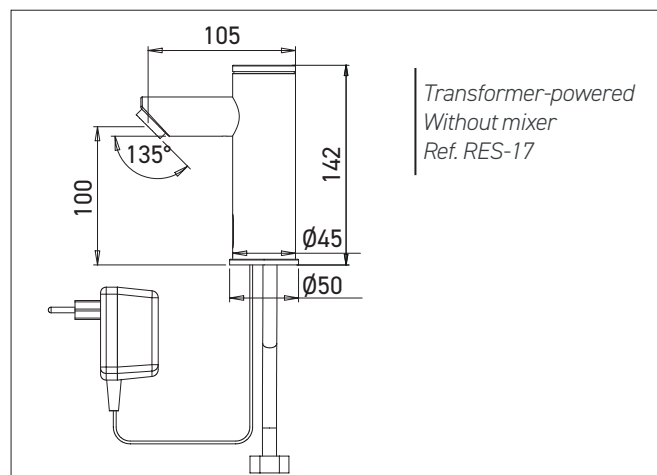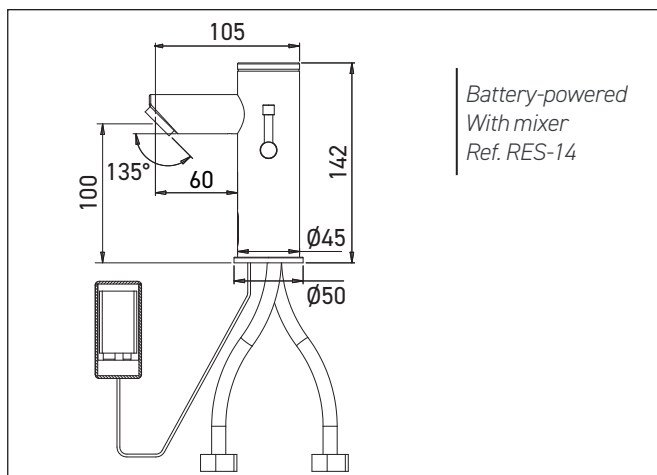

References model choices

SMART electronic faucet

- **RES-14** with mixer, 9V battery
- **RES-15** without mixer, 9V battery
- **RES-16** with mixer, 230/9V transformer
- **RES-17** without mixer, 230/9V transformer

Options

- RES-31 remote control
- Finishes: Matte Black, PVD Brushed Nickel, PVD Matte Gold, Antique Bronze, PVD Copper (contact us)
- Limited flow rate 1.9 LPM or 3 LPM
- L version spout 90 mm
- IP 68 transformer to supply up to 4 faucets ref. RES-294
- Junction box to supply up to 10 faucets ref. RES-295
- Extended lever for PRM ref. MH
- Matching SMART soap dispenser

