

RONDEO stainless steel electronic wall mounted faucet

References: RES-20-S1 / RES-21-S1 / RES-22-S1 / RES-23-S1

Description

Touch free brushed AISI 316 stainless steel wall-mounted electronic faucet, for cold or pre-mixed water.

Optimum durability of the tap surface (scratch resistance, UV, fingerprints, etc.), giving your washrooms a long-lasting and flawless look.

The brushed finish provide a matt, sleek and modern appearance.

316 stainless steel is particularly appreciated for its bacteriostatic properties in the medical sector and its anti-corrosion properties in a marine environment. Environmentally friendly, stainless steel is fully recyclable.



AISI 316 stainless steel High resistance and contemporary design

Features

Self adjusting infrared sensor or settings adjustable by remote control (sensor range, flow time, hygiene rinse, temporary stop, security time, reset...).

Power supply 9 V battery or 230/9V transformer.

Sensor includes a low battery LED indicator.

Security stop after 90 seconds without interruption.

Periodic hygiene rinse.

Brushed AISI 316 quality stainless steel spout L170 mm ø 38 mm (or L 220 mm version).


Adjustable NEOPERL aerator to optimise jet direction, with limited 6 LPM flow rate (3 LPM, 1.9 LPM or 1.3 LPM on demand).

Anti-limescale protection.

Panel mounted installation, with rear access, through max 35 mm wall (up to 200 mm option), with external M½" solenoid valve and filter, or recessed installation with flush-mounted box below the sink including solenoid valve, shut off valve and a stainless steel front panel. Cold or pre-mixed water supply.

Water pressure: 0.3 - 8.0 bars / Maximum temperature: 70°C.


CE. ACS. 3 year warranty.



References model choices

RONDEO stainless steel electronic faucet

- RES-20-S1 panel mounted, 9V battery
- RES-21-S1 panel mounted, 230/9V transformer
- RES-22-S1 recessed, 9V battery
- RES-23-S1 recessed, 230/9V transformer

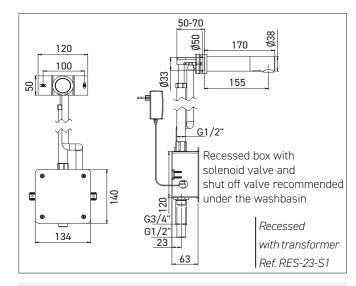

Options

- Remote control ref. RES-31
- Limited flow rate: 1.3, 1.9 or 3 LPM
- Longer spout L version 220 mm
- Fixing through wall up to 200 mm
- IP 68 transformer to supply up to 4 taps ref. RES-294
- Junction box to supply up to 10 taps ref. RES-295
- Matching AISI 316 soap dispenser and hand dryer
- Integrated on washbasin iron support frame





