

AKWARENO wall-mounted electronic mixer tap

Reference: **RES-210**

Description

Electronic wall-mounted washbasin faucet with mixer, movable spout and internal 9V battery.

Ideal for renovation.

Tempo detection: water is triggered by hand approach at a short distance from the sensor cell.

The water stops automatically after 8 seconds (adjustable with optional remote control) or earlier, by bringing the hand close to the sensor again.

Easy installation and upkeep.

Electronic faucets reduce water consumption, save energy, and optimize sanitary hygiene.



Features

Self-adjusting short infrared sensor or adjustable with remote control (detection range, flow duration, periodic flushing, temporary stop...).

9V lithium battery and solenoid valve integrated in the faucet body.

Sensor includes a low battery LED indicator.

Periodic hygiene rinse.

Chrome-plated brass spout with L137 mm movable spout.

Offset connectors, filters, and finishing escutcheons included.

Adjustable NEOPERL aerator to optimise jet direction, with limited flow rate of 6 LPM (3 LPM, 1.9 LPM or 1.3 LPM on demand).


Limescale protection.

M3/4" wall mounting, 150 mm centres (adjustable from 130 to 170 mm).

Cold and hot water supply.

Operating pressure: 0.3 – 8.0 bars. / Max. temperature 70°C.

CE. ACS. 3 year warranty.

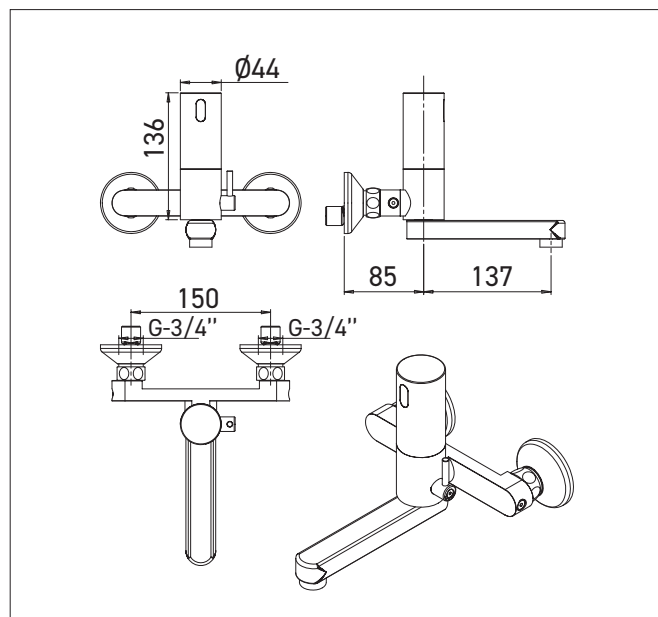

Reference

AKWARENO electronic mixer tap

- **RES-210** 9V battery

Option

- RES-31 Remote control