# SUPRATECH

# ONE 2in1 soap and water electronic faucet

Reference: RES-57


## Description

The ONE 2-in-1 faucet seamlessly blends water and soap, enhancing your washbasin with elegance and touch-free ease of use.

With its refined curves, hidden sensor at the spout's tip, and soap conveniently accessible near the water, it provides a comfortable and hygienic handwashing experience.

Its quick, single-hole installation saves space, eliminating the need for a second hole, particularly beneficial for ceramic surfaces or renovations.

Designed for easy installation, effortless maintenance, and reliable performance in high-usage environments.



Powered by 9V battery or 230/9V transformer. Chrome-plated brass spouts ø 25 mm.

#### Water:

Self-adjusting infrared sensor integrated directly into the spout's tip.

Adjustable settings via remote control (sensor range, flow time, hygiene rinse, temporary off, safety time, reset...).

Security stop after 90 seconds without interruption.

Periodic hygiene rinse.

Limited flow rate of 4LPM (1.9LPM available upon request).

External solenoid valve M1/2".

Cold or pre-mixed water supply.

Operating pressure: 0.3 - 8.0 bars. / Max. temperature 70°C.


### Soap:

Activated by infrared sensor.

1L refillable tank and mounting support (2 or 6L options) Operates with peristaltic pump for liquid soap or antibacterial gel.

Viscosity 100-3800 cPs. PH 6.5 - 8.5

CE. ACS. 3 year warranty.

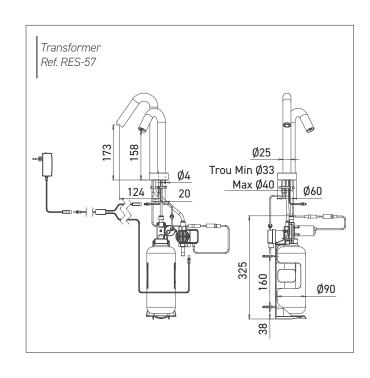

#### Reference

ONE 2in1 electronic faucet

**RES-57** 230/9V transformer

#### Options

- RES-31 remote control
- Finishes: matte black, PVD brushed nickel, PVD matte gold antique bronze, PVD copper (Contact us)
- Limited flow rate 1,9 LPM
- Low soap level indicator light ref. RES-57V
- IP 68 transformer to supply up to 2 faucets ref. RES-294
- Junction box to supply up to 5 faucets ref. RES-296
- 6L soap tank to supply up to 6 faucets





