

Automatic faucet integrated behind mirror

References: **RES-88** / **RES-89**

Description

Touch-free electronic faucet with infrared sensor for behind mirror installation.

Engineered for easy installation and maintenance.

Perfect combination with the electronic behind mirror soap dispenser.

Electronic faucets preserve water, save energy, and optimize sanitary hygiene.

Features

Self-adjusting infrared sensor or adjustable with remote control (detection range, flow duration, periodic flushing, temporary stop...).

Minimum distance of 30 cm below the sensor, avoiding any shiny surfaces.

Powered by 9V battery or 230/9V transformer.

Sensor includes a low battery LED indicator.

Security stop after 90 seconds without interruption.

Periodic hygiene rinse.

Chrome-plated brass spout 50 mm.

Adjustable NEOPERL aerator to optimise jet direction, with limited 5 LPM flow rate (1.9 LPM on demand).


Limescale protection.

Cold or pre-mixed water supply, with F1/2" flexible hose.

M $\frac{1}{2}$ " solenoid valve and filter.

Water pressure: 0.5 – 8.0 bars / Maximum temperature: 70°C.

CE. ACS. 3 year warranty.

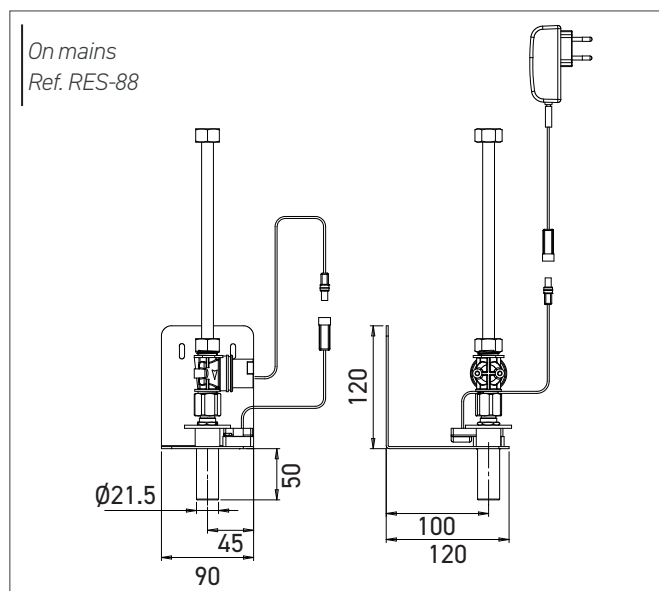

References model choices

Behind mirror electronic faucet

- **RES-88** 9V battery
- **RES-89** 9V transformer

Options

- RES-31 Remote control
- 1.9 LPM limited flow rate
- Multi-supply transformer or bare wires
- RES-88C Invisible spout
- Thermostatic pre-mixer

