

COSM019 stainless steel wall-mounted electronic faucet

References: **RES-95-S1 / RES-95P-S1**

Description

Wall-mounted electronic washbasin faucet with infrared sensor in high-quality brushed AISI 316 stainless steel.

Its elegant design with a slim \varnothing 19 mm spout adds a contemporary and polished touch to sanitary spaces.

Engineered for easy installation and maintenance.

Electronic faucets reduce water consumption, save energy, and optimize sanitary hygiene.



Features

Self-adjusting infrared detection.

Settings adjustable by remote control (detection range, flow duration, periodic flushing, temporary stop...)

Powered by 230/9V transformer or 9V battery.

Low battery indicator light for replacement.

Security stop after 90 seconds of uninterrupted use.

Periodic hygiene rinse.

Brushed AISI 316 stainless steel spout, length 200 mm \varnothing 19mm.

Aerator with flow rate limited to 6 LPM (1.3 LPM option).

Brushed AISI 316 stainless steel infrared sensor \varnothing 40 mm.



Recessed installation, with G1/2" threaded spout, \varnothing 32 mm wall-set sensor, external M1/2" solenoid valve and filter.

Cold or pre-mixed water supply.

Lead-free water circuit.

Water pressure: 0.5 – 8 bar / Maximum temperature 70°C CE.

3-year warranty.

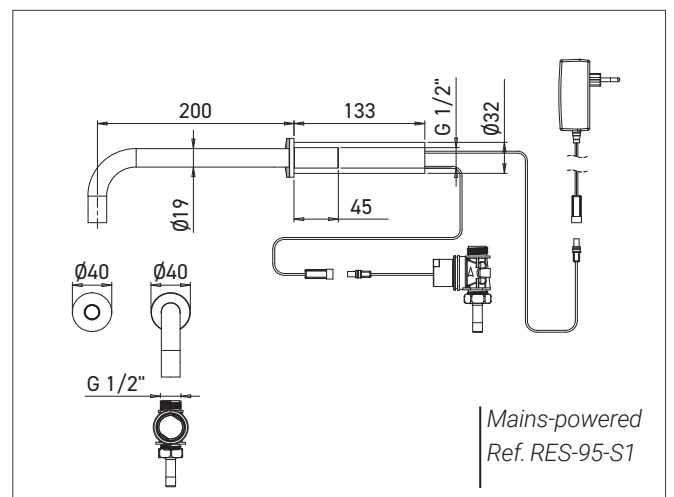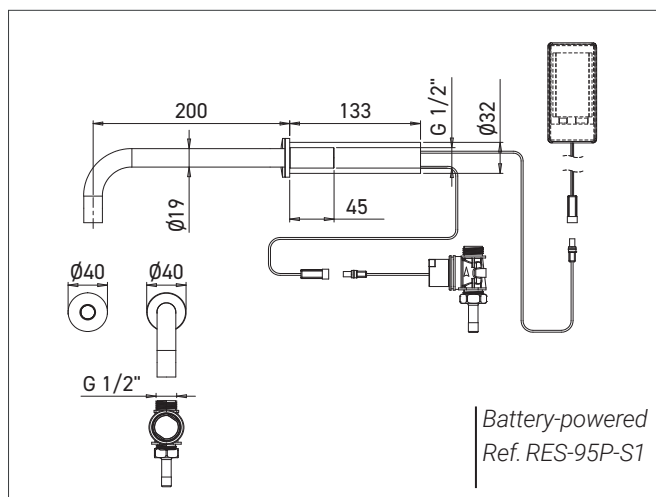

References model choices

COSMO19 electronic stainless steel faucet

- **RES-95P-S1** battery-powered version
- **RES-95-S1** mains-powered version

Options

- RES-31 Adjustment remote control
- RES-294 IP68 transformer to power up to 4 faucets
- RES-295 Junction box to power up to 10 faucets
- Limited flow rate 1.3 L/min