SUPRATECH

VIVA electronic kitchen faucet

References: REW-01 / REW-02

Description

VIVA kitchen faucet with water activation either manually via the mixer lever, or through automatic detection for greater comfort and improved hygiene for the user.

Comfortable automatic activation.

Water flows when hands approach the sensor, touch-free. The faucet stays clean, even with dirty hands.

Flexible manual activation.

With the easy-to-use mixer lever (can be mounted on the right or left) and ±180° swivel spout with pull-out end.

Temporary shut-off for cleaning.

Practical deactivation function for cleaning the sink.

On a double sink, the sensor must be oriented toward one basin.



Features

Touch-free activation by 5 cm short distance hand approach (adjustable from 1 to 30 cm), with water flow maintained during presence within the sensor range (25 or 35 cm).

Temperature adjustment: manual flow via the temperature lever.

Automatic flow via the opposite mixer button.

Mixer lever with adjustable temperature limiter.

Setting adjustments adjustable on the electronic module.

Safety shut-off after 1 minute without interruption, adjustable from 10 seconds to 10 minutes.

Optional periodic rinse with adjustable rinse time and interval.

Powered by 6 x AA 1,5 V Alkaline batteries or 230V/50 Hz transformer.

Max. standby consumption on mains 0.2W.

Battery life up to 200,000 activations (max 3 years).

Chrome-plated brass body.

Spout rotation ±180° (adjustable). Pull-out end.

Flow rate: 9 LPM at 3 bars.


Water inlets: F 3/8".

Mounting hole: ø 35 mm.

Water temperature: max 70°C. / Water pressure: 0.5-5 bars

(above this, a pressure reducer must be used).

CE. 2 year warranty.

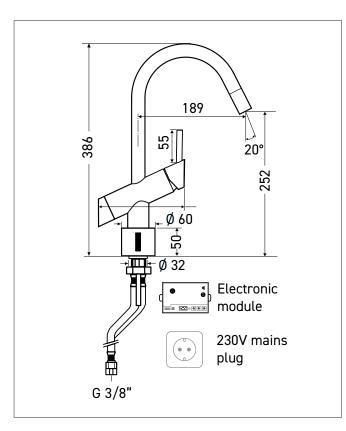

References model choices

VIVA electronic kitchen faucet

 REW-01 **6V** battery

REW-02 230V transformer





