

RONDEO stainless steel wall mounted hand dryer

References: SM-20-S1 / SM-23-S1

Description

High speed, high-quality AISI316 stainless steel touch free wall mounted hand dryer with a sleek, vandal-resistant design.

Optimum durability of the hand dryer spout surface (scratch resistance, UV, fingerprints, etc.), giving your washrooms a long-lasting and flawless look.

Users can dry their hands right after they wash them and all water goes in the basin, simplifying the cleaning process.

With hand dryer's hidden motor, only the spout appears on the wall, creating a new space-saving washroom experience.

HEPA filter for added hygienic properties.

When combined as a trio with the wall mounted faucet and soap dispenser, this all-in-one set improves hygiene and makes washing and drying simple.



Self adjusting infrared sensor 170 mm ± 20 mm or settings adjustable by remote control (sensor range, drying time, security time, temporary stop).

Operating voltage: 220-240 V 50-60Hz / 6.1-6.7 A / 1.34 - 1.6 KW. Standby consumption 0.3-0.4W.

Security stop after 60 seconds without interruption.

Brushed AISI 316 quality stainless steel spout ø 45 mm L 220 mm. Panel mounted installation, with rear access, through max 35 mm wall or recessed installation.

Drying time 10-15 seconds.

Sound level min. 70 dB - max. 73.7 dB.

Air flow 75-100 m/sec. adjustable by external button.

HEPA filter.

Heater element 450-900 W, adjustable

Heater with safety auto reset thermostat at 85° C.

Cut-off fuse at 142°C.


Motor with safety auto reset thermostat at 95° C.


Class 1. IP 34.

CE. 3 year warranty.



RONDEO air & water & soap

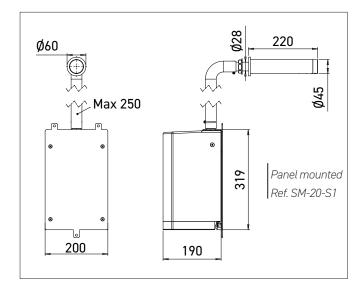

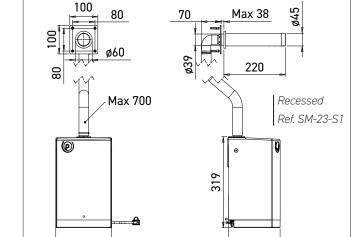

References model choices

RONDEO stainless steel electronic hand dryer

- RES-20-S1 panel mounted
- RES-23-S1 recessed

Options

- Remote control ref. RES-31
- Matching soap dispenser and hand dryer
- Integrated on washbasin iron support frame











200

190