

Semi-recessed stainless steel high-speed hand dryer

Reference: **SM-3005**



Description

Semi-recessed stainless steel automatic hand dryer for high performance and space saving in sanitary areas.

Ultra fast and comfortable hand drying in 6 seconds!

Elegant, easy-to-maintain design.

Reduces the risk of vandalism and deterioration.

Blue light beam when in use for hand placement.

Accessible to PRM.

Vandal proof.

Features

Self-adjusting infrared sensor.

Operating voltage: 230V, 50/60 Hz, 5 A, 1.45 kW.

Standby power consumption less than 0,5W.

Air flow speed at 75-100 m/s. Output 125.5 m³/h.

Sound level: 70 to 73.7 dB max. at 1 m.

Drying time: 6 seconds

(according to UL PCR hand dryer rule).

Cover in AISI 304 stainless steel, 1.5 mm thick.

Nominal power output 1450 W

(350-625W motor, 450-825W heater).

Adjustable airflow and sound level.

Heated or ambient air switch.

Security stop after 60 seconds without interruption.

Triple safety protection:

- Motor with safety thermostat at 95° C.

- Heater with safety thermostat at 85° C.


- Cut-off fuse at 142°C.

Dimensions: **W250x D179 x H513 mm.**

Dimensions of recessed cut-out: **W235 x D123 x H495 mm.**

Net weight: **11.6 kg.**

5 year warranty. CE. Class 1. IP 21.

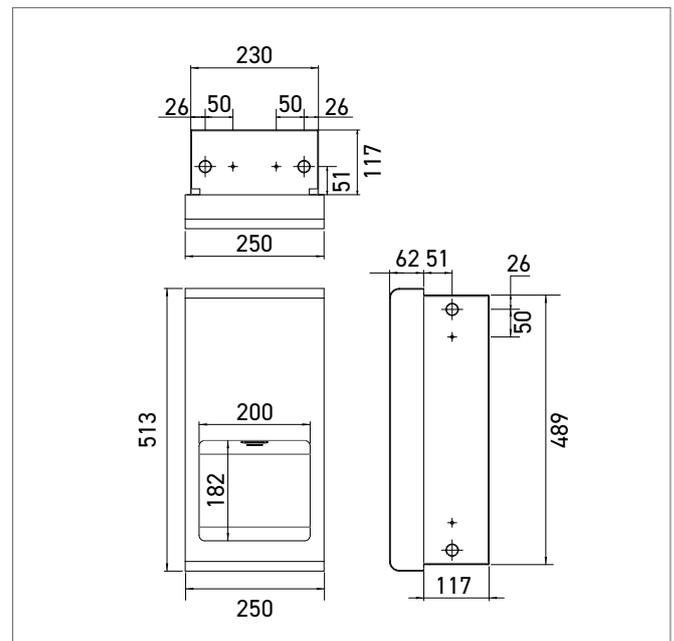

Environmental labels and certifications:



Reference

- **SM-3005 brushed stainless steel**

Options

- IP23 protection rating
- PVD finish

